


Battery Management
Circuit Protection & Switches
Connectors & Insulators
Custom Panels
Meters
Power Conversion & Connection
Power Distribution



For decades Ancor, BEP, Blue Sea Systems, CZone, Lenco, Marinco, Mastervolt and ProMariner have worked independently to provide innovative electrical products. Now the eight companies are working together to offer comprehensive electrical solutions for marine and mobile applications.

Providing more than products. Providing Solutions.

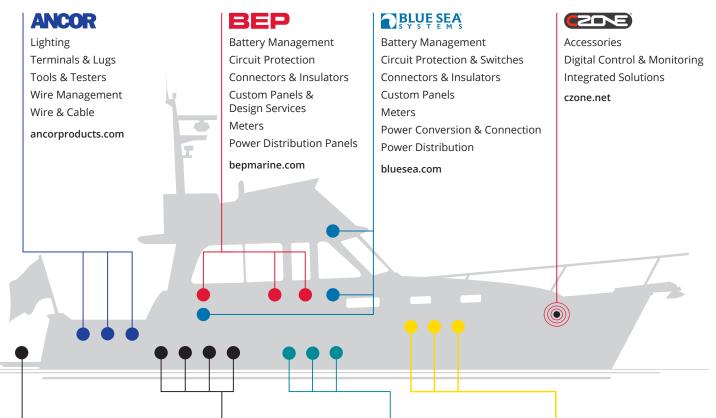



Actuators & Accessories Auto Glide Automatic Boat Leveling Electric Hatch Lifts **Electric Trim Tabs Rocker Switch Kits Tactile Switch Kits**

lencomarine.com

Trim Tab Retrofit Kits

ProMariner[™]

Inverter / Chargers Inverters Isolators Vented Battery Chargers Waterproof Battery Chargers promariner.com

MASTERVOLT

Alternators & Regulators **Batteries Battery Chargers** Digital Control & Monitoring Inverter / Chargers Inverters Transformers mastervolt.us

MARINCO Battery Management


DC Power Connections Horns Lighting **Power Conversion** Shore Power Ventilation Wiper Systems marinco.com









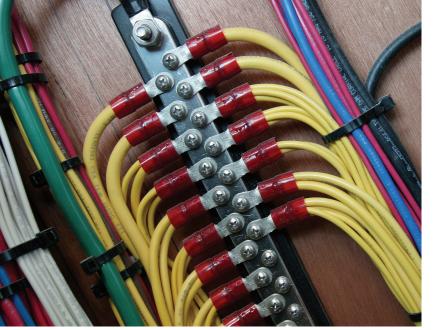







What makes Blue Sea Systems different:

I Founder's Vision

Blue Sea Systems was founded in 1992 based on a commitment to create innovative, high quality electrical products to improve the safety, simplicity, and reliability of boating. Since that time the range of product has expanded to over 1,000 items and distributed to customers in over 50 countries including Marine, Industrial, RV, and Specialty Vehicle markets. Products include battery chargers, battery switches, automatic charging relays, fuse blocks, busbars, meters, and both standard and custom power distribution panels. The company is committed to offering quality products that are engineered for the harsh marine environment, built to last, with a guarantee of satisfaction and industry leading technical support.

Selection

Over 1,000 electrical products are designed to work together as a fully integrated system

I Fast Delivery

Just in time manufacturing for many products in Bellingham, Washington ensures rapid order fulfillment

I Worldwide Access to Product

A distribution network in over 50 countries provides access to products when they are needed

I Information

24-hour access to product information, selection tools, and technical articles online at bluesea.com

I Industry Standards

Industry involvement ensures products meet ABYC, NMMA, and Coast Guard standards

I Quality

Blue Sea Systems is committed to product quality and is managed in a manner consistent with international business practices with a robust product warranty program.

2019 **NEW** Products





Air Brake Compressors

For the Emergency Vehicle market. The Air Brake Compressors automatically maintain air brake system at ready status.

Part # 7920 Horizontal Mount
Part # 7921 Vertical Mount





Water-Resistant Accessory Panels

12V charging and monitoring. Integrated 15A circuit breaker with a silicon water-resistant boot and gasket.

Part #'s 4363-4369





10A and 20A Push Button Switches

Contemporary compact switching with integrated ON indication.

Part #'s 4160-4163 10A Switches **Part #'s 4190-4192** 20A Switches



Emergency Vehicle Label Kit

For use with ST-Blade Fuse Blocks.

Part # 7870





Sure Eject Pigtails

For the Emergency Vehicle market. A secondary method of disconnecting from shore power for added reliability.

Part # 7830 15A yellow Part # 7831 20A yellow Part # 7832 15A black Part # 7833 20A black





IGNITION PROTECTED

m-Series Battery Switches

Up to 300 Amps continuous-rated, three-position, no combine, battery switch.

Part # 6008 Red **Part # 6008200** Black







Water-Resistant Circuit Breaker Switch Panels

Designed for exposed mounting applications. Four and six position panels in gray and camo.

Part # 4320 4 position, gray
Part # 4321 4 position, + 12V socket & dual USB charger, gray
Part # 4322 6 position, gray
Part # 4323 4 position, camo
Part # 4324 4 position, + 12V socket & dual USB charger, camo

Part # 4325 6 position, camo



48V Dual USB Chargers

Intelligent device recognition maximizes charge rate for phones, tablets, or other mobile devices. Includes new springhinged cover.

Part # 1038 Switch Mount Part # 1046 Socket Mount





C-Series UL-489 Circuit Breakers

Expanded line of circuit breakers that meet CFR 46 / Coast Guard requirements.

Part #'s 7440-7446 DC Single Pole Part #'s 7454-7459 AC Single Pole Part #'s 7461-7467 AC Double Pole





M2 OLED Vessel Systems Monitor (M2 VSM)

Monitors up to four critical boat systems (AC, DC, Tank & Bilge) in one compact digital monitor. NMEA 2000 & CZone compatible.

Part # 1850

2020 **NEW** Products



Sure Eject Mounting Adapter

For the Emergency Vehicle market. Easily install 15A and 20A Sure Ejects from the front of a vehicle.

Part # 7860





15A to 20A Adapter Pigtail

For the Emergency Vehicle market. Allows connection between a standard 15A extension cord and a 20A Sure Eject.

Part # 7834



ST-Blade Water-Resistant Fuse Block

Provides water-resistant circuit protection for ATO/ATC fuses and circuit breakers.

Part # 5056





ATO®/ATC®- Style Low Profile Circuit Breakers

Use a manually resettable circuit breaker instead of an ATO or ATC fuse.

Part #'s 7062-7068



Water-Resistant 100A Common BusBar

Provides secure water-resistant bussing for harsh environments.

Part # 2356





Stud Mount Insulating Boots

Quickly and easily insulate conductive posts and studs.

Part # 4000







360 Panel BusBar Modules

Consolidate bussed terminations in a Custom 360 Panel module. **CUSTOM ONLY**





Mini OLED Tank Meters

Confidently monitor tank levels with a simple to read digital OLED display. Compatible with most resistive tank sending units.

Part # 1739 Yellow **Part # 1739200** Blue





Mini Blue OLED Meters

Monitors essential electrical system parameters on a bright, waterproof, daylight readable OLED Screen. Now available with blue OLED color that matches other devices on the dash.

Part # 1732200 Ammeter
Part # 1733200 Voltmeter
Part # 1741200 Temperature Meter



Push Button Round Format Individual and Custom Labels

Individual pictograms and custom text labels for the 15A Backlit Push Button Switches.











UPDATED

ML Remote Battery Switches and Solenoids

Now capable of switching 48V nominal systems remotely. Ideal for off-grid, electric vehicle, and solar applications.

Part #'s 7701, 7702, 7703, 7704





Table of Contents

INTRODUCTION

System Diagrams 8

POWER CONVERSION & CONNECTION

Air Brake Compressors 14 P12 Battery Chargers 15 P12 Charger Remote 16 **EV Remote Display** 16 Sure Eject™ 17 BatteryLink® Chargers 18 **Dual USB Chargers** 20 12V Socket & Plug System Water Resistant Accessory Panels 22 **DeckHand Dimmers** 23

BATTERY MANAGEMENT

Manual Battery Switches	26
Battery Management Panels	34
Solenoid Switches	35, 48
Low Voltage Disconnect	36, 49
Automatic Timer Disconnect	37, 49
Remote Battery Switches	38, 48
Automatic Charging Relays	40, 49
Add-A-Battery Kits	44

CIRCUIT PROTECTION & SWITCHES

Fuses	57, 68
Fuse Holders	57, 68
Fuse Blocks	57, 69
Circuit Breaker Blocks	70
Circuit Breakers	71, 86
Surface Mount Systems	84
Switches	88







CONNECTORS & INSULATORS

BusBars96Terminal Blocks99PowerBars100PowerPost Connectors102Feed Through Connectors102CableCaps104CableClams105



POWER DISTRIBUTION

Waterproof & Water-Resistant	108, 109
Contura Switch Water Resistant	108, 110
WeatherDeck® Waterproof	108, 111
360 Panel System	112
Traditional Metal	113
DC Branch Circuit Breaker	114
AC Branch Circuit Breaker	118
AC Main Circuit Breaker	120
AC RCBO Circuit Breaker	122
AC Source Selection	123
AC/DC Combination	126
Custom 360	128

p. 108 p. 110 p. 111 p. 112 p. 113 p. 114 p. 120 p. 122 p. 123 p. 126 p. 128

METERS

Analog Meters	136, 145
M2 OLED Monitors	138, 145
Vessel Systems Monitors	140, 145
Digital Meters	142, 145
Mini OLED Meters	144, 145
Mini Clamp Multimeter	144, 145
2 Inch Round Gauges	146
DC Shunts	147
Universal Temperature Sensor	147
AC Transformers	147

ACCESSORIES

Floyd Bell Turbo Series Alarm	150
Insulating Back Covers	150
120V AC Dual Outlet	150
LED Indicators	151
Lockout Slides	151
Toggle Guard	151
Labels	152


APPENDIX & INDEX

Wire Selection Chart	157
Fuse Selection Chart	158
Fuse Holder Selection Chart	159
Wiring Schematics	160
DC Discussion	162
AC Discussion	163
Marketing Materials	164
Part Number Index	165






p. 164




Trailerable Boat System

2 Battery Bank, 1 Engine



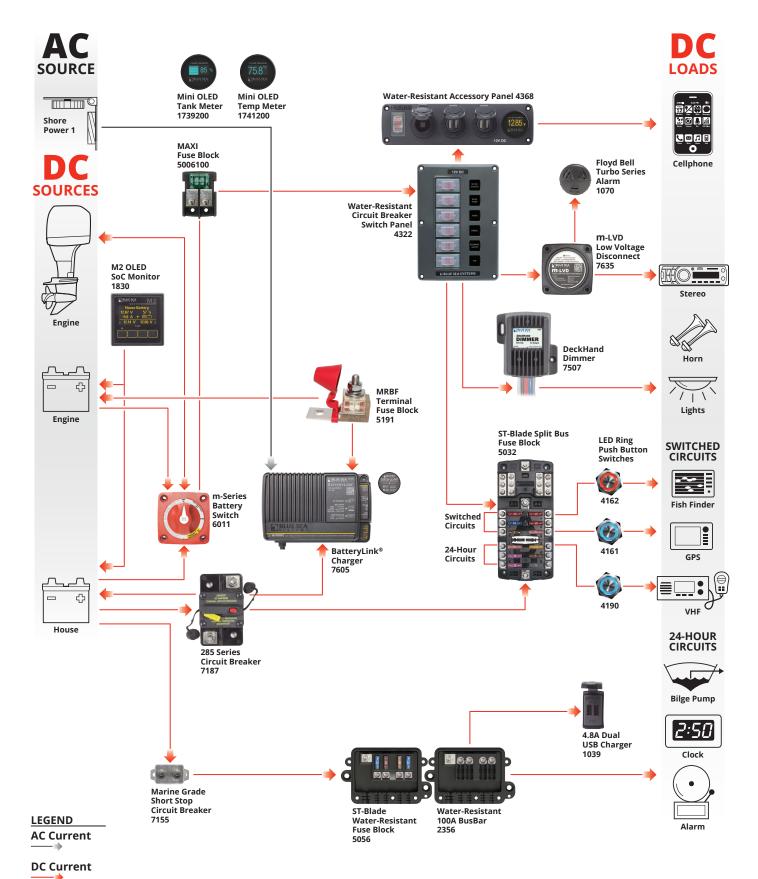


DC Current

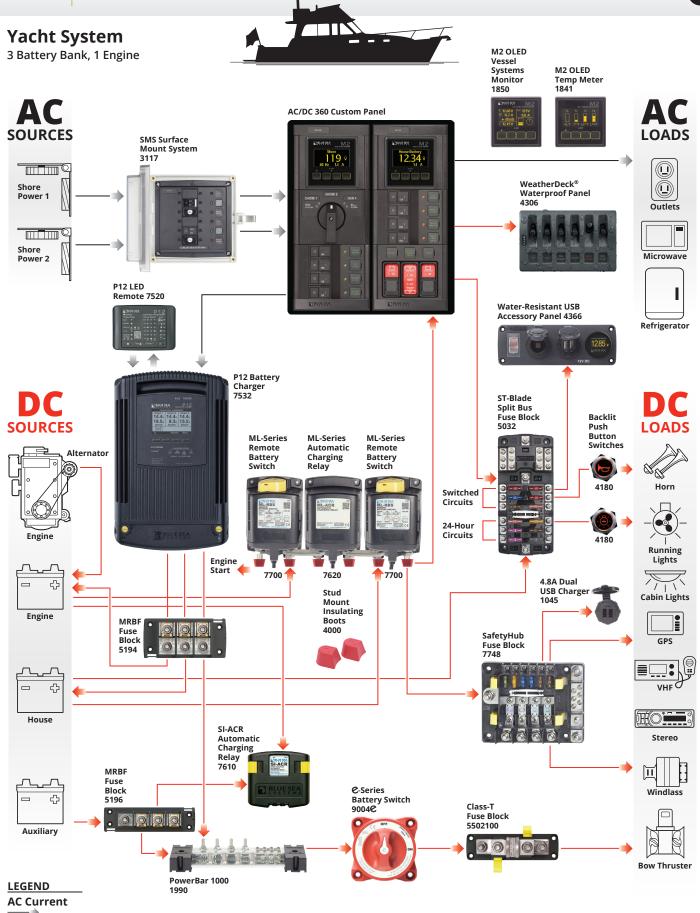

Police Interceptor System

2 Battery Bank, 1 Engine




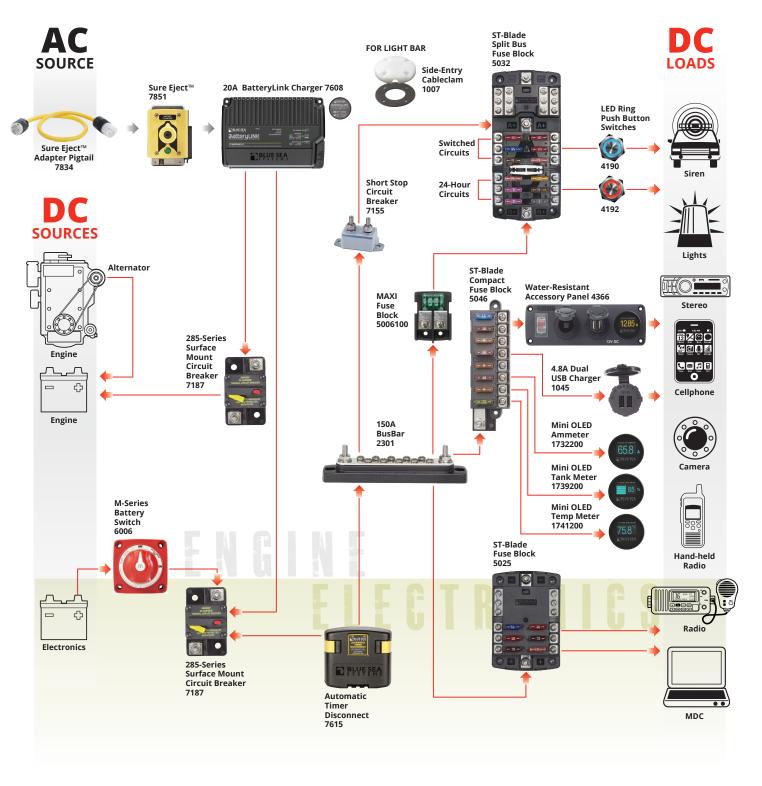



Fire Apparatus System

2 Battery Bank, 1 Engine

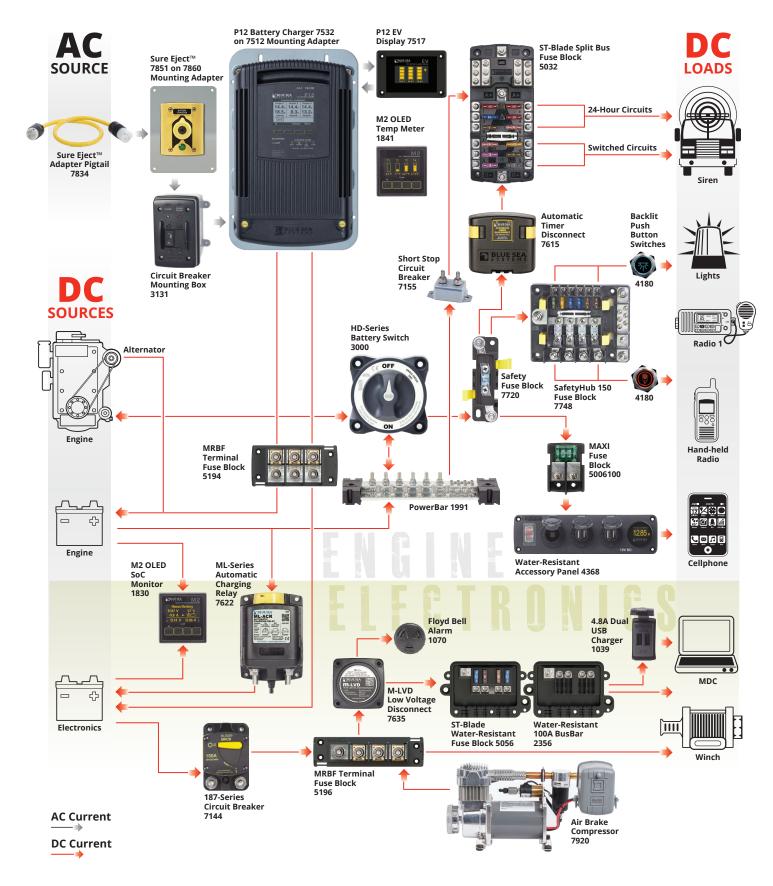

POWER CONVERSION & CONNECTION

Air Brake Compressors



Automatically maintains air brake system at ready ready status.

P12 Battery Chargers



A four stage, three output, dry mount device designed for use in harsh environments.

P12 Battery Charger EV Display and Remote





Works with the P12 Battery Chargers

Sure Eject™





Automatic AC disconnect ejects power cords upon ignition to prevent damage.



POWER CONVERSION & CONNECTION

BatteryLink® Chargers Dual USB Chargers

12V Socket & Plugs

Water-Resistant USB Accessory Panels

DeckHand™ **Dimmers**





Charge two batteries at or away from the dock or garage.





Intelligent device recognition allows rapid charging of phones, tablets, or other mobile devices.



Designed to withstand the rigors of wet environments and constant vibration.



Panels offer customizable 12 Volt charging and monitoring options.



Digitally controls dimming of non-regulated LED, incandescent, and halogen lights.



Batteries are the heart of the electrical system and are often the single largest electrical expense.

Batteries are sensitive to failure and a shortened life if not charged properly. Modern battery chemistries require adherence to manufacturers' charging recommendations. Battery manufacturers agree precise control of voltage, time, and temperature is critical. Batteries may perform poorly and fail prematurely due to a charger's failure to properly manage these functions. A well designed battery charger will allow these variables to be correctly set for the requirements of each battery type and will manage them properly in the charging process.

Air Brake Compressors

Automatically maintains air brake system at ready status, because lives depend on it.

- · Designed for emergency vehicle use
- Automatically turns ON at 95 PSI and OFF at 125 PSI
- Industrial grade compressor provides reliable, long term operation
- · Easy installation, no mounting plate required
- · Integrated vibration damping mounts
- · Serviceable air filter and water separator filter
- · Works in conjunction with engine driven compressor
- · Integrated auto drain to protect your air system

Nominal Voltage 12V DC

Motor Type Permanent Magnet
Factory ON-OFF PSI Threshold ON: 95 PSI, OFF: 125 PSI


Maximum Amp Draw 11A

Operating Temperature Range 4.4°C to 65°C (40°F to 150°F)

Air Outlet Female 1/4" NPT

PN	Description
7920	Horizontal Mount Air Brake Compressor
7921	Vertical Mount Air Brake Compressor
7910	Air Filter Assembly - complete
7911	Replacement Air Filter Elements
7912	Replacement Water Separator Filter




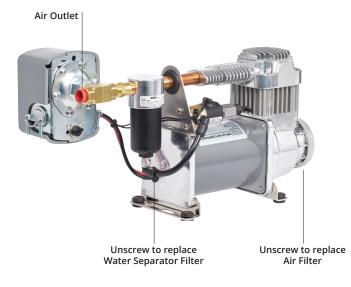

тесн tip.

P12 Four Stage Battery Charging

- 1. Bulk charges batteries to 75-80% of full charge.
- 2. Absorption slowly completes remaining charge.
- 3. PreFloat™ moves each battery individually from Absorption to PreFloat, based on the need of each battery. This prevents overcharging and damage to the batteries. Up to 0.5V difference between Absorption and PreFloat voltages can be achieved.
- 4. Float maintains battery charge.




Example of Flooded Lead Acid Battery

Battery Equalization Mode: User selected battery equalizing provides advanced battery conditioning, revitalizing wet acid batteries.

OTHER BATTERY CHARGERS

Conventional battery chargers move all batteries from Absorption to the Float stage simultaneously with no ability to adjust for individual battery requirements.



Example of Flooded Lead Acid Battery


Forced Absorption: A period when batteries are potentially over charged.

Charge Coordination

A boat's batteries typically spend less than 2% of their time being charged by the alternator. For the remaining 98% of the time they are being maintained by the AC battery charger. During this time, it is important that the proper charging stage of Bulk, Absorption, PreFloat, or Float be applied to each battery.


UNDERWAY

When engine is running and alternator is charging batteries, ACRs combine batteries, providing charge to each battery from the engine.

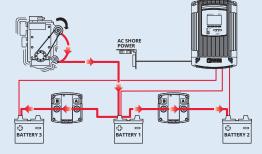

AT THE DOCK

When P12 Battery Charger is operating, communication with ACRs isolates batteries so the proper charge is applied to each battery.

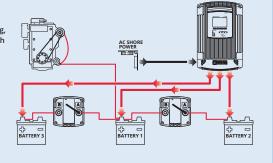

15

P12 Battery Chargers

Four stage, three output, dry mount design. Rugged, finned aluminum case

- PreFloat™ stage prevents over charging of start battery
- Power factor corrected for efficient use of AC
- · Intuitive diagnostic screens
- User defined charge profiles and customizable settings
- · Provides charging for up to three battery banks
- · Large, bright display
- Multi-language: English, French, German, Italian, Spanish
- Charge Coordination with Blue Sea Systems Automatic Charging Relays (ACR) controls ACR state ensuring proper float stage for each battery
- Battery Temperature Compensation adjusts charge voltage based on battery temperature
- AC over and under voltage shut down and automatic restart
- Over and under battery temperature protection charger will not operate if battery temperature rises above or falls below a set value
- DC over voltage and reverse polarity protection
- · Surge and short circuit protection

	7531	7532
Total Output Current	25A	40A
Input AC Current	4.5A @ 115V AC	7.5A @ 115V AC
	2.25A @ 230V AC	3.75A @ 230V AC
Recommended	60Ah Minimum	60Ah Minimum
Battery Bank Sizes*	Example: 1 × Group 24	Example: 1 × Group 24
	330Ah Maximum	440Ah Maximum
	Example: 3 × Group 31	Example: 4 × Group 31
	101156	

Nominal Output Voltage 12V DC

Output Connections 3 positive, 1 negative

Universal AC Input Voltage 90V–265V AC Input Frequency Range 45–65 Hz
Typical Float Voltage 13.5V DC
Max. Available Voltage 16.0V DC
Output Voltage Accuracy 0.05V DC

Operating Temperature $-20^{\circ}\text{C} (-4^{\circ}\text{F}) \text{ to } 70^{\circ}\text{C} (158^{\circ}\text{F})$ Storage Temperature $-30^{\circ}\text{C} (-22^{\circ}\text{F}) \text{ to } 80^{\circ}\text{C} (176^{\circ}\text{F})$ Battery Types** Flooded, Gel, AGM, TPPL, User

- * Battery bank sizes are tested to California Energy Commission compliance (CEC). Larger and smaller size banks could charge well, but consume slightly more power over the charging cycle.
- ** Consult battery manufacturer specifications for other battery types to avoid damage. Do not mix battery types.

Regulatory

CE marked, Designed and constructed for compliance to UL-1236 Marine, CSA 22.2 No. 107.2, and ABYC A-31 standards. Ignition protection per ISO 8846, and SAE J1171. Meets FCC Part 15, Class B requirements. Designed and tested to comply with California Energy Commission (CEC) efficiency requirements, and ship with these settings by default.



PN	Amps	Volts	Width in (mm)	Height in (mm)	Depth in (mm)
7531	25A	12V DC	8.46 (215)	13.00 (330.6)	4.30 (109)
7532	40A	12V DC	8.46 (215)	13.00 (330.6)	4.30 (109)

Related Products







SI-ACR p. 43



ML-Series ACRs p. 47



MRBF Fuse Blocks p. 64







Battery Charger Mounting Adapter

Easily mount any Blue Sea Systems P12 Battery Charger or ProMariner ProNauticP Battery Charger without drilling new holes

- Mounts directly into industry standard mounting holes from existing chargers
- Integrated nuts allow battery charger mounting fasteners to be inserted from either the front or rear
- Fasteners included with the P-12 Adapter plate: Qty 4: #10-32 x 0.75" pan head machine screws Qty 4: #10-32 Nylock Nuts





PN Description
7512 Battery Charger Mounting Adapter

EV Battery Charger Display

Intuitive battery monitoring for emergency vehicle use







- · Designed for emergency vehicle use
- · Drop in replacement for traditional rectangular displays
- Automatically detects 1-3 battery banks
- AC charge indication verifies that power is connected and the battery charger is charging
- · Plain language fault indication relays if there is a fault with the battery charger
- Dip switch selectable screen configuration allows the display to show voltage bar graphs or the P12 Battery Charger summary screen
- Displays voltage bar graphs even when AC power is not present
- Optional standby mode shuts off screen after 4 hours of inactivity
- · Automatic ON based on motion with integrated knock sensor
- · Bright, daylight readable, OLED display

Display Size 55mm x 28mm Display Type Yellow OLED

Input Voltage 6V–36V DC, reverse polarity protected

Amperage Draw

Maximum 50 mA

Minimum < 1 mA in Standby Mode

Standby Mode Shuts off screen after 4 hours of inactivity. Will resume

normal function upon movement of the vehicle or by tapping the unit several times in succession.

Accuracy ± 1% at 36 Volts DC

Number of Inputs 3 battery inputs with common reference

Regulatory

Monitor face is IP66 – protected against powerful water jets when installed according to instructions.

PN	Description	Width in (mm)	Height in (mm)	Depth in (mm)
7517	EV Battery Charger Display	4.7 (119.25)	3.2 (80.5)	1.2 (29.7)



P12 Battery Charger LED Remote

Indicates battery charger stage and alerts as well as controlling basic battery charger functions





1521

LED Indicators

- · Quick check for green light confirms charging
- Displays charging stage including PreFloat for each battery
- Indicates when the charger is in equalization mode
- · Indicates charger's internal fan mode
- Displays the percentage of output current for each battery.
 Will also indicate maximum output setting when maximum output is adjusted to accommodate for AC source limitations.
- · Provides warning and alert status for quick diagnostics

Four Control Buttons

- Fan: User adjustable settings (OFF, LOW, or HIGH)
- **Dim/ Alarm:** Provides adjustment to brightness of LEDs on display as well as Silence function for alarms.
- Output: User adjustable charger output when AC source limitations exist that require lowering the AC current draw.
- Standby: Places P12 Battery Charger into standby mode

PN	Description	Volts	Width in (mm)	Height in (mm)	Depth in (mm)
7520	LED Remote	12V DC	4.15 (105.46)	3.01 (76.56)	.95 (23.91)
1521	360 Panel	12V DC	4.88 (123.83)	4.75 (120.65)	.95 (23.91)

Related Products



P12 Battery Charger p. 15

Sure Eject™

Automatic AC disconnect ejects power cords upon ignition to prevent damage

- · Designed for emergency vehicle use
- Motor driven design ensures years of reliable operation
- The ejection piston is self-recessing, with no cocking required
- · Keyed plug design allows for easy one-handed insertion of connector
- · Anti-arcing design on insertion and ejection
- Built in status LED indicates the presence of AC power and ejection alerts
- · Automatically attempts additional ejections if needed
- Compatible with existing 15A and 20A connectors already in the station
- Standard mounting holes for easy retrofit
- Includes connector, yellow cover and 5 label kit
- 6 color covers available

· Pigtails offer a secondary method of disconnecting from shore power for added reliability (sold separately)

8V -16V DC Operating Voltage Range Nominal Voltage 120V AC **Continuous Rating** 7850: 15A 7851: 20A

PN	Description
7850	15A Sure Eject
7851	20A Sure Eject
7840	15A Connector
7841	20A Connector
7820	Yellow Cover
7821	Red Cover
7822	Black Cover
7823	White Cover
7824	Blue Cover
7825	Grey Cover
7830	15A Sure Eject Yellow Pigtail
7831	20A Sure Eject Yellow Pigtail
7832	15A Standard Black Pigtail
7833	20A Standard Black Pigtail
7834 NEW	15A to 20A Adapter Pigtail



7840 / 7841



VIDEO D











7830 / 7831





7834

Related Products







Display

Sure Eject Mounting Adapter NEW

Easily install 15A and 20A Sure Ejects from the front of a vehicle

- · Allows one person installation of Sure Eject
- · No special shaped cutouts required
- Threaded backing plate secures Sure Eject to vehicle without added hardware
- Compatible with all 15A and 20A Sure Eject ejection units and covers



PN	Description
7860	Sure Eiect Mounting Adapter

BatteryLink® Chargers

Charge two battery banks with shore power or the engine's alternator

- AC charging at the dock or garage: Use AC shore power to charge two isolated battery banks with the 3 stage battery charger
- DC charging away from the dock or garage: Share the DC power from the alternator with both the start and the auxiliary battery through the integrated ACR
- Emergency jump start by combining both batteries if start battery is low. (20A model only) single pole/single throw switch required. (sold separately)
- · Battery temperature compensation prolongs battery life (temperature sensor 1820 included)
- Start isolation protects sensitive electronics from voltage sags and spikes
- Includes LED remote indicator for charge status at the helm
- · Snap-on insulating cover

Nominal Output Voltage 12V DC

Output Connections 2 positive, 1 negative
Universal AC Input 100V-240V AC, 50/60 Hz

Typical Float Voltage (25°C) 13.5V DC
Typical Absorption Voltage (25°C) 14.4V DC
ACR Combine Voltage 13.0V
ACR Open Voltage 12.75V

Terminal Stud Size 1/4"-20 (accepts M6 ring terminal)

Maximum 1/4" Terminal Stud Torque 60 in-lb (6.8 Nm)

Positive Terminal Stud Size (20A model only) 3/8"-16 (accepts M10 ring terminal)

Maximum 3/8" Terminal Stud Torque 140 in-lb (15.8 Nm) Quick Connect Terminal Size 1/4" x 0.032" Warranty 5 Year

Battery Types Flooded, AGM, TPPL

North American Models

PN	Total Output Current	ACR Continuous	Plug Style
7605	10A	65A	North American: NEMA 5-15P
7608	20A	170A	North American: NEMA 5-15P

Regulatory

Designed and constructed for compliance to UL-1236 Marine, CSA 22.2 No. 107.2 and ABYC A-31 standards. Ignition protected per ISO 8846 and SAE J1171. Meets FCC Part 15, Class B requirements. Designed and tested to comply with California Energy Commission (CEC) efficiency standards. Waterproof IP67 - protected against immersion up to 1 meter for 30 minutes (see inside back cover)

International Models

PN	Total Output Current	ACR Continuous	Plug Style
7604	10A	65A	European: CEE 7/7
7603	10A	65A	International: Bare wire
7607	20A	170A	European: CEE 7/7
7606	20A	170A	International: Bare wire
7609 NEV	V 20A	170A	Australia/New Zealand: AS/NZS 3112

Regulatory


CE Certified, Designed and constructed for compliance to EN60335-2-29.

Ignition protected per ISO 8846 and SAE J1171.


Waterproof IP67 - protected against immersion up to 1 meter for 30 minutes (see inside back cover)





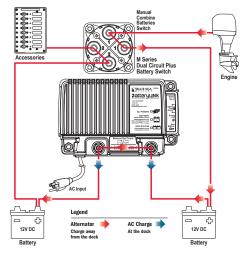

10A BatteryLink Charger

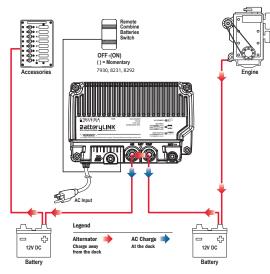

20A BatteryLink Charger



AC & DC Battery Charging Explained

DC Charging (Away from the Dock or Garage)

The BatteryLink Charger incorporates DC charging through an integrated Automatic Charging Relay (ACR). An ACR uses a relay combined with a voltage sensing circuit. When a DC charge is applied to the start battery, and causes the voltage to rise above 13.0V, the relay closes and combines the two batteries to share the charge. When the charge is taken away or a load on the battery causes the voltage to drop below 12.75V, the relay will open, isolating the two batteries. This means that even when the BatteryLink Charger is disconnected from AC power you can charge both your battery banks with a DC charging source, like an engine alternator.

AC Charging (At the Dock or Garage)

The BatteryLink Charger is powered by AC when the cord is plugged in, and will source current to charge your batteries. However, unlike a typical two bank charger, the BatteryLink Charger will charge both batteries simultaneously using the integrated ACR. This works in the same way as when an external DC charging source is used. When AC power is applied, and the voltage of the start battery rises above 13.0V, the ACR will close. This combines the batteries, allowing charge current to flow to the auxiliary battery as well as the start battery. For this reason, the BatteryLink Charger can only be used in 12V applications.






10A Battery Charger - 65A ACR

7603 International: Bare wire **7604** European: CEE 7/7 7605 North American: NEMA 5-15P



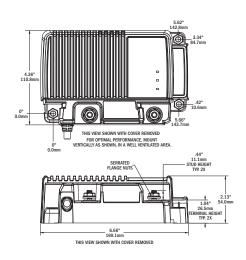

Related Products



Battery Switch p. 26




Mini Add-A-Battery Plus p. 44




20A Battery Charger - 170A ACR

7606 International: Bare wire **7607** European: CEE 7/7 7608 North American: NEMA 5-15P 7609 Australia/New Zealand: AS/NZS 3112





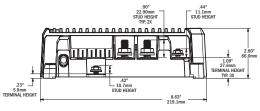

THIS VIEW SHOWN WITH COVER REMOVED

Related Product



C-Series Battery Switch p. 28

12/24V Dual USB 2.1A Chargers

Charge two mobile devices on the go



· Compatible with popular mobile devices

- Internal fusing
- · Conformal coated circuit board for the harsh marine environment
- · Protective dust cap keeps debris and moisture out
- · Mounts in a common 1-1/8" hole

Maximum Output Current
Input Voltage Range
Output Voltage

Port Configuration

2.1A DC (total)
9V–32V DC
5V DC ±5%
D +=2.0V, D-=2.8V

Parasitic Current Draw 15mA
Thermal Overload Protection Yes
Short Circuit Protection Yes
Reverse Polarity Protection Yes
USB 2.0, Type A

Cutout Dimensions 1-1/8" (29 mm) diameter

Regulatory RoHS, CE certified

PN	Description
1016	Socket Mount Charger - Black
1016200	Socket Mount Charger - White

Related Products



Water-Resistant USB Accessory Panels p. 22

USB Extension

Control a stereo or other device remotely from a phone or tablet in the cockpit.

- USB 2.0 data/voltage port easily mounts at the dash with a prewired connecting cable that conveniently plugs directly into the USB on the stereo.
- · Protective dust cap with tether keeps out dust and spray

Cable Length 5 ft (1.524M)

Cutout Dimensions in (mm) 1-1/8" (29 mm) diameter

USB 2.0, Type A

Regulatory

1044

Description 12V DC USB

IP66 - protected against powerful water jets (see inside back cover)



12/24V Dual USB 4.8A Chargers

Intelligent device recognition maximizes charge rate for phones, tablets, or other mobile devices



- Charges at the speed required by specific devices
- Internal filtering for reduced electronic interference
- · Over temperature protection
- Conformal coated circuit board for the harsh marine environment
- Protective dust cap keeps debris and moisture out
- 1039 Mounts in an existing contura switch aperture

• 1045 Mounts in a common 1-1/8" hole

Maximum Output Current 4.8A DC (total)
Input Voltage 9V-32V DC
Output Voltage 5V DC ±5%

Port Configuration Intelligent Device Recognition

Parasitic Current Draw 1mA
Thermal Overload Protection Yes
Short Circuit Protection Yes
Reverse Polarity Protection Yes

USB 2.0, Type A


Cutout Dimensions 1039 - 1.45" × 0.83" (36.83 × 21.08 mm)

1045 - 1-1/8" (29 mm) diameter

Regulatory

RoHS. CE certified

PN	Description
1039	Contura Switch Mount Charger
1045	Socket Mount Charger



Related Products



Water-Resistant USB Accessory Panels p. 22

21

48V Dual USB 4A Chargers

Intelligent device recognition maximizes charge rate for phones, tablets, or other mobile devices



- Ideal for golf carts and other 48V systems
- · Spring-hinged cover keeps debris and moisture out
- Charges at the speed required by specific devices
- Internal filtering for reduced electronic interference
- Over temperature protection
- Conformal coated circuit board for the harsh marine environment
- 1038 Mounts in an existing contura switch aperture
- 1046 Mounts in a common 1-1/8" hole

 $\begin{array}{ll} \mbox{Maximum Output Current} & \mbox{4A DC (total)} \\ \mbox{Input Voltage} & \mbox{32V-64V DC} \\ \mbox{Output Voltage} & \mbox{5V DC $\pm 5\%$} \end{array}$

Port Configuration Intelligent Device Recognition

Parasitic Current Draw 1mA
Thermal Overload Protection Yes
Short Circuit Protection Yes
Reverse Polarity Protection Yes

USB 2.0, Type A

Cutout Dimensions 1038 - 1.45" × 0.83" (36.83 × 21.08 mm)

1046 - 1-1/8" (29 mm) diameter

Regulatory RoHS. CE certified

PN	Description	PN	Description
1038	Contura Switch Mount Charger	1035	Spring-hinged cover for 1038 & 1039
1046	Socket Mount Charger	1036	Spring-hinged cover for 1046 & 1045

360 Panels

Integrates DC Socket and Dual USB Chargers with 360 Panel System





1472 1478

PN	Description	Width in (mm)	Height in (mm)	Depth in (mm)
1472	2 × 1011	4.88 (123.83)	4.75 (120.65)	1.50 (38.10)
1478	1 × 1011 1 × 1016	4 88 (123 83)	4 75 (120 65)	1 50 (38 10)

Related Products



Water-Resistant USB Accessory Panels p. 22

12 Volt Socket and Plugs

Designed to withstand the rigors of wet environments and constant vibration

- · Corrosion resistant materials
- Twist lock system plug locks securely into socket
- · Internal strain relief and cord seal
- Nickel plated copper alloy used for all current carrying components
- Plug has a sealing ring to keep out spray and make it seat firmly in the socket
- Socket features a protective dust cap that keeps debris and moisture out
- 1012 and 1013 heavy duty 18 gauge wire
- 1012 cord reaches up to 6 feet

Voltage Nominal 12V DC
Amperage Max. Operating 15A DC (socket)
Amperage Max. Operating 10A DC (plug)

Socket Cutout Dimensions 1-1/8" (29 mm) diameter

PN	Description	Dust Cap
1010	Plug	
1011	Black Socket	Yes
1011200	White Socket	Yes
1012	Single Plug with Single Socket Extension	Yes
1013	Single Plug with Dual Socket Extensions	Yes
1014	Mounting Bracket for Sockets	
1015	Plug and Socket Set - Includes 1010 and 1011	Yes



Water-Resistant USB Accessory Panels

Easy to install accessory panels include a 15A circuit breaker switch and pre-wired harness. Panels offer customizable 12V charging and monitoring options.

- Pre-wired harness included in all panels for easy installation
- Silicon breaker boots and gasket protects against water ingress
- Illuminated Carling Technologies 15A circuit breaker switch allows the ability to shut off panel preventing parasitic draw
- Polycarbonate/ABS panel face is UV-stabilized, flame retardant, and will not corrode
- 12V DC only

Regulatory

CE certified

IP66 - protected against powerful water jets (see inside back cover)

PN	Description	Width in (mm)	Height in (mm)	Depth in (mm)
4363	15A Circuit Breaker, 12V Socket, 2.1A Dual USB Charger	4.94 (125.4mm)	2.25 (57.2mm)	2.53 (64.3mm)
4364	15A Circuit Breaker, 2x Blank Apertures	4.94 (125.4mm)	2.25 (57.2mm)	Based on installed components
4365	15A Circuit Breaker, 12V Socket, 2x 2.1A Dual USB Chargers	6.61 (168.0mm)	2.25 (57.2mm)	2.53 (64.3mm)
4366	15A Circuit Breaker, 12V Socket, 2.1A Dual USB Charger, Mini Voltmeter	6.61 (168.0mm)	2.25 (57.2mm)	2.75 (69.8mm)
4367	15A Circuit Breaker, 3x Blank Apertures	6.61 (168.0mm)	2.25 (57.2mm)	Based on installed components
4368	15A Circuit Breaker, 12V Socket, 2x 2.1A Dual USB Chargers, Mini Voltmeter	8.29 (210.5mm)	2.25 (57.2mm)	2.75 (69.8mm)
4369	15A Circuit Breaker, 4x Blank Apertures	8.29 (210.5mm)	2.25 (57.2mm)	Based on installed components





4365



4366





4364



4363



4368



Related Products



2.1A Dual USB



4.8A Dual USB Chargers p. 20



12V Socket p. 21



Mini Ammeter

p. 144





Mini Temp Meter p. 144

Mini Tank Meter

23

DeckHand™ Dimmers

Digitally controls dimming of non-regulated LED, incandescent, and halogen lights

- · Illuminated exit with adjustable time delay
- Supports multiple switch locations
- · Memory for last dimmer setting
- Bulb saver prevents bulb aging while batteries are being charged
- Provides continuous voltage control from 0 to 100% of input voltage
- · Offset mounting tabs allow dimmers to be mounted close together
- Retail package includes momentary SPDT (ON)-OFF-(ON) switch 8216 (p. 88)

Maximum Parasitic Current <2mA
Temperature Rating -40°C to 85°C

Regulatory


CE marked


Meets ISO 8846 and SAE J1171 external ignition protection requirements


IGNITION PROTECTED

PN	Amps	Volts	Operating Range	Width in (mm)	Height in (mm)	Depth in (mm)
7506	6A	12V DC	9V-16V	3.23 (82.0)	3.47 (88.1)	1.30 (33.0)
7504	6A	24V DC	18V-32V	3.23 (82.0)	3.47 (88.1)	1.30 (33.0)
7507	12A	12V DC	9V-16V	3.23 (82.0)	3.47 (88.1)	1.30 (33.0)
7509	12A	24V DC	18V-32V	3.23 (82.0)	3.47 (88.1)	1.30 (33.0)
7508	25A	12V DC	9V-16V	3.23 (82.0)	3.47 (88.1)	1.30 (33.0)



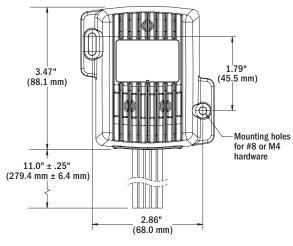



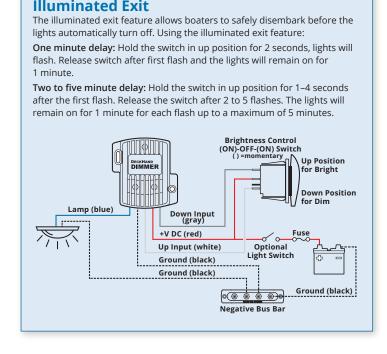



Example of nested DeckHand Dimmers

BATTERY MANAGEMENT

Manual Battery Switches

26



Commonly used on small boats or vehicles where the batteries are located near the operator, allowing the high amperage switching and the control of the switch to be the same location.

Battery Management Panels





Easily manages multiple battery bank systems.

Solenoid Switches





250A electronic switch with no manual control, for circuits where a manual battery disconnect is offered elsewhere in the circuit.

Low Voltage Disconnect (LVD)





Senses low battery voltage and disconnects non-critical loads to save power for engine starting.



Battery management is central to the safe operation of a boat or vehicle.

All boats and vehicles with an engine have at least one battery with the primary purpose of starting the engine and providing power for loads such as lights, pumps, and electronics. The safe switching between batteries, loads, and charge sources is achieved using products in this section.

BATTERY MANAGEMENT

Automatic Timer Disconnect (ATD)





Adjustable time or voltage based battery disconnect automatically shuts off devices to preserve battery power.

Remote Battery Switches (RBS)



Used when there is not an easily accessible location near the batteries to mount the battery switch, requiring either a long cable run or a battery switch mounted in a difficult to access location.

Automatic Charging Relays (ACR)






Automatically combines two battery banks during charging and isolates batteries when discharging and optionally when starting the engine.

Add-A-Battery Kits



Simplify switching and automate charging for two battery bank systems. Simply turn the battery switch On when you arrive and Off when you leave.

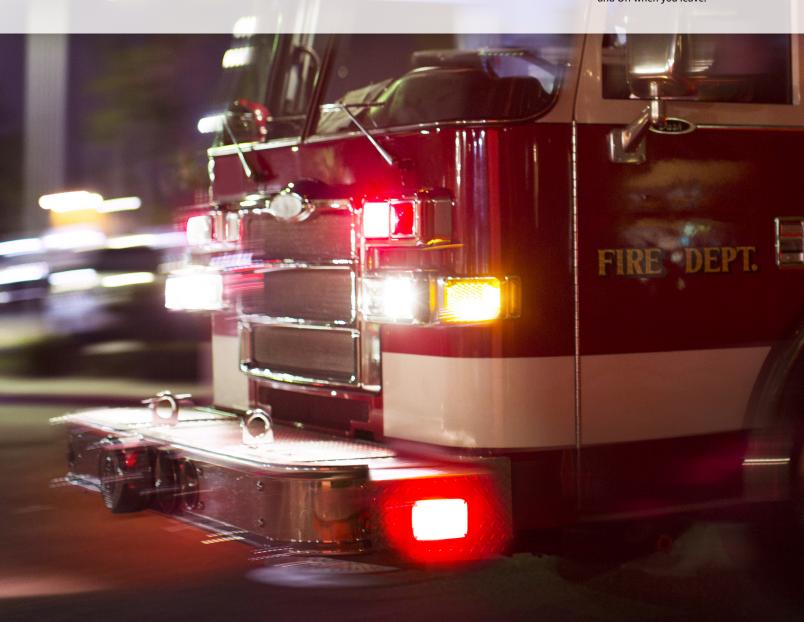

M-Series Battery Switches

300 Amps continuous rating for outboards and small gasoline or diesel engines

- Tin-plated copper studs for maximum conductivity and corrosion resistance
- Studs accept 3/8" (M10) ring terminals
- 7/8" (22 mm) stud length accepts multiple cable terminals
- Blue Sea Systems one-piece terminal stud design never loosens over time
- One-piece stainless flange nuts ensure safe and secure connections
- · Isolating cover protects rear contacts
- Breakout tabs allow wire access in any direction
- 6 Circuit label set included (not included with 6004, 6005, 6004200, 6005200)
- Icon Circuit Identification Label Kit available 7902 sold separately (p. 156)

	6004, 6005, 6006	6007	6010, 6011
	6004200	6007200	6010200
	6005200	6008	6011200
	6006200	6008200	
Cranking Rating: 30 sec.	900A	900A	675A per circuit
Intermittent Rating: 5 min.	500A	500A	450A per circuit
Continuous Rating	300A	300A	300A per circuit
Voltage Max. Operating	48V DC	32V DC	32V DC


Regulatory


CE marked, ISO 8846, UL Listed – UL 1107 electric power switches Meets American Boat and Yacht Council (ABYC) requirements Meets UL 1500 and SAE J1171 external ignition protection requirements IP66 – protected against powerful water jets (see inside back cover)


IGNITION PROTECTED

PN	Description	Color
6004	Single Circuit ON-OFF with Locking Key	Red
6004200	Single Circuit ON-OFF with Locking Key	Black
6005	Single Circuit ON-OFF with Key	Red
6005200	Single Circuit ON-OFF with Key	Black
6006	Single Circuit ON-OFF	Red
6006200	Single Circuit ON-OFF	Black
6007	Selector 4 Position	Red
6007200	Selector 4 Position	Black
6008	Selector 3 Position	Red
6008200	Selector 3 Position	Black
6010	Dual Circuit™	Red
6010200	Dual Circuit™	Black
6011	Dual Circuit Plus™	Red
6011200	Dual Circuit Plus™	Black
7903	Removable key for 6004	Red
7903200	Removable key for 6004200	Black
7900	Removable key for 6005	Red
7900200	Removable key for 6005200	Black
7901	Removable knob	Red
7901200	Removable knob	Black
9159	Paralleling link bus (2 pack)	-
1139	360 Panel Battery Switch Module	-

For the full list of specifications and operation diagrams see pages 32-33 For the wiring schematics for typical applications see pages 160-161







Mounting Options



m-Series Battery Switch Mounting Panel



1139 (switch sold separately) **Dimensions (W x H):**

4.88 × 4.75 in

(123.83 × 120.65 mm)

- 360 Panel System
- Accepts the m-Series Battery Switch, m-ACR, or m-LVD

Single Circuit ON-OFF

Switches a single battery to a single load group





6004, 6005, 6006





6005



6006

Selector 3 Position

Switches isolated battery banks to all loads





6008



6 Circuit Label Set

Related Products







m-ACR



Mini Add-A-Battery

Selector 4 Position

Switches isolated battery banks to all loads or combines battery banks to all loads





6007

Dual Circuit™

Simultaneously switches two isolated battery banks or circuits. May be used to switch the positive and negative conductors for required applications.





6010

A WARNING

The positive and negative conductors should not be attached to the same battery switch. The only exceptions are the Dual Circuit™ Battery Switches, 6010 and 5510**c**. Since these models have electrically isolated circuits and do not include a combine feature, they can provide disconnect to the positive and negative conductors simultaneously.

Dual Circuit Plus™


Simultaneously switches two isolated battery banks or combines battery banks to all loads. CAN NOT be used to switch positive and negative conductors because of the combine feature.





6011







Circuit Identification Label Kit p. 156

C-Series Battery Switches

350 Amps continuous rating for inboard gasoline or diesel engines

- · Tin-plated copper studs for maximum conductivity and corrosion resistance
- Accepts up to 4/0 AWG (120 mm²) battery cables
- Studs accept 3/8" (M10) ring terminals
- 7/8" (22 mm) stud length accepts multiple cable terminals
- Blue Sea Systems one-piece terminal stud design never loosens over time
- One-piece stainless flange nuts ensure safe and secure connections
- Fits most standard Perko and Guest battery switch hole patterns
- · Tactile indicator conveys knob position by feel
- Icon Circuit Identification Label Kit available 7902 sold separately (p. 156)

	9003E 9004E	9001E 9002E 11001	5510E 5511E
Cranking Rating: 30 sec.	1,200A	1,200A	700A per circuit
Intermittent Rating: 5 min.	600A	600A	525A per circuit
Continuous Rating	350A	350A	350A per circuit
Voltage Max. Operating	48V DC	32V DC	32V DC

Regulatory

CE marked, ISO 8846, UL Listed – UL 1107 electric power switches Meets American Boat and Yacht Council (ABYC) requirements Meets UL 1500 and SAE J1171 external ignition protection requirements IP66 – protected against powerful water jets (see inside back cover)

IGNITION PROTECTED


PN	Description	AFD*
5510E	Dual Circuit™	
5511E	Dual Circuit Plus™	
9001E	Selector 4 Position	
9002E	Selector 4 Position	Yes
9003E	Single Circuit ON-OFF	
9004E	Single Circuit ON-OFF	Yes
11001	Selector 3 Position	Yes


* Includes Alternator Field Disconnect (AFD) which protects the diodes in the alternator in the event of the switch being switched to the OFF position while the engine is running. If the AFD is not used to protect the alternator, an LED can be connected to the AFD terminals to indicate when the battery switch is in any position but OFF.

For the full list of specifications and operation diagrams see pages 32-33 For the wiring schematics for typical applications see pages 160-161

Mounting Options







Related Products



SI-ACR p. 43



Add-A-Battery p. 44



Circuit Identification Label Kit

тесн tip...

Choose the Dual Circuit Plus™

- Easily manage two battery banks
- When battery bank selection is not necessary
- When using sensitive electronics
- When paired with an Automatic Charging Relay (ACR)

The Dual Circuit Plus is a double pole switch that supplies power to devices connected to a specific battery bank.

House electronics are isolated from the Start bank.

This preserves the Start Battery and prevents sensitive electronics from being subjected to voltage sags and spikes during starting. Designed for use with an Automatic Charging Relay (ACR) to provide simultaneous charging of two battery banks from the engine's alternator.

How to use the Dual Circuit Plus with an ACR:

- 1. Power is Needed Turn the switch into the ON position.
- 2. No Power Needed (Storage) Select OFF to prevent current draw.
- Emergency Parallel (Jump Starting) Turn the switch to the Combine Batteries position. Once the engine is running, turn the switch to the ON position.

Single Circuit ON-OFF

Switches a single battery to a single load group







9003E



Simultaneously switches two isolated battery banks or circuits.

May be used to switch the positive and negative conductors for required



Selector 3 Position

Switches isolated battery banks to all loads





Selector 4 Position

Switches isolated battery banks to all loads or combines battery banks to all loads







WARNING

Dual Circuit™

applications.


The positive and negative conductors should not be attached to the same battery switch. The only exceptions are the Dual Circuit™ Battery Switches, 6010 and 5510 c. Since these models have electrically isolated circuits and do not include a combine feature, they can provide disconnect to the positive and negative conductors simultaneously.

Dual Circuit Plus™

Simultaneously switches two isolated battery banks or combines battery banks to all loads. CAN NOT be used to switch positive and negative conductors because of the combine feature.





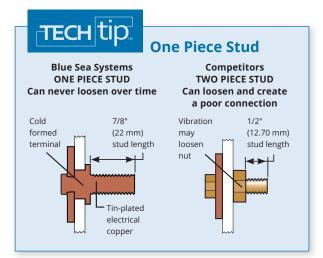

^{*} Includes Alternator Field Disconnect (AFD)

HD-Series Battery Switches

Up to 600 Amps continuous rating for large diesel engines

- · Tin-plated copper studs for maximum conductivity and corrosion resistance
- Accepts up to 4/0 AWG (120 mm²) battery cables
- Studs accept 1/2" (M12) ring terminals
- 7/8" (22 mm) stud length accepts multiple cable terminals
- Blue Sea Systems one-piece terminal stud design never loosens over time
- One-piece stainless flange nuts ensure safe and secure connections
- Fits most Perko and Guest low amperage battery switch hole patterns
- · Case design allows surface or rear mounting options
- Tactile indicator conveys knob position by feel
- Icon Circuit Identification Label Kit available 7902 sold separately (p. 156)

	3000, 3001	3002, 3003, 11003
Cranking Rating: 30 sec.	1,750A	1,600A
Cranking Rating: 1 min.	1,325A	1,150A
Intermittent Rating: 5 min.	900A	700A
Continuous Rating	600A	500A
Voltage Max. Operating	32V DC	32V DC
Regulatory		


CE marked, ISO 8846, UL Listed – UL 1107 electric power switches Meets American Boat and Yacht Council (ABYC) requirements Meets UL 1500 and SAE J1171 external ignition protection requirements IP66 – protected against powerful water jets (see inside back cover)


IGNITION PROTECTED

PN	Description	AFD*
3000	Single Circuit ON-OFF	
3001	Single Circuit ON-OFF	Yes
3002	Selector 4 Position	
3003	Selector 4 Position	Yes
11003	Selector 3 Position	Yes

* Includes Alternator Field Disconnect (AFD) which protects the diodes in the alternator in the event of the switch being switched to the OFF position while the engine is running. If the AFD is not used to protect the alternator, an LED can be connected to the AFD terminals to indicate when the battery switch is in any position but OFF.

For the full list of specifications and operation diagrams see pages 32-33 For the wiring schematics for typical applications see pages 160-161





Related Products



Circuit Identification Label Kit

Mounting Options





Single Circuit ON-OFF

Switches a single battery to a single load group







Selector 4 Position

Switches isolated battery banks to all loads or combines battery banks to all loads










Selector 3 Position

Switches isolated battery banks to all loads





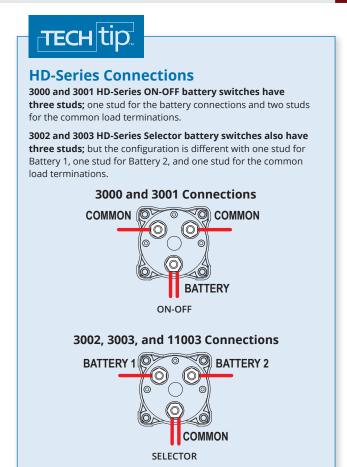



management in the engine room.

Manual Battery Switch Specification Table

	Manual Battery Switch Specification Table								
Switch Type	Single Circuit ON-OFF				Se	elector 3 Positi	on		
Function	Switches a single batte to a single load grou					Switch	Switches either isolated battery bank to loads		
Switch Family		m-Series		€ -Series	HD-Series	m-Series	⊘ -Series	HD-Series	
PN	With Lockout	6005	6006	9003E, 9004E*	3000, 3001*	6008	11001	11003	
Page Number		26		28	30	26	28	30	
Battery Inputs			1			2	2	2	
Switch Positions			2			3	3	3	
Battery Combine Make Before Break Contact		N/A		N	/A	N/A		- /A	
Cranking Rating (30 sec.)		900A		1,200A	1,750A	900A	1,200A	1,600A	
Intermittent Rating (5 min.)		500A		600A	900A	500A	600A	700A	
Continuous Rating		300A		350A	600A	300A	350A	500A	
Voltage Maximum Operating	48V DC			48V DC	32V DC	32V DC		DC	
Width in (mm)	2.83" (72 mm)			3.85" (98 mm)		2.83" (72 mm)	3.85" (9		
Height in (mm) Mounting Centers	2.83" (72 mm)			3.85" (98 mm) 2.83" (72 mm) 2.00" (76 mm) 2.18" (55 mm)		3.85" (98 mm) 3.00" (76 mm)			
Mounting	2.18" (55 mm)								
Hardware		#10 (M5) Screws		1/4" (M6	i) Screws	#10 (M5) Screws	1/4" (M6) Screws	
Terminal Stud Size		3/8"-16	(M10)		1/2" (M12)	3/8"-16 (M10)	3/8"-16 (M10)	1/2" (M12)	
Terminal Stud Length			7/8" (22 mm)	I			7/8" (22 mm)		
Max. Terminal Stud Torque		120 in-lb (13.56 N-m)		140 in-lb (15.82 N-m)	220 in-lb (24.86 N-m)	120 in-lb (13.56 N-m)	140 in-lb (15.82 N-m)	220 in-lb (24.86 N-m)	
Terminal Stud Material			Tin-plated copper				Tin-plated copper		
Cable Size to Meet Ratings ‡		4	/0 AWG (120 mm²))			4/0 AWG (120 mm²) I)	
Cable Clearance for 4/0 Cables		1.12" (28.4 mm)		1.10" (2	7.9 mm)	1.12" (28.4 mm)	1.10" (2	7.9 mm)	
Ignition Protected			JL 1500, SAE J1171				UL 1500, SAE J1171		
These diagrams are intended for reference of how the switches operate and are not wiring diagrams. Consult an ABYC certified marine electrical professional for system design and circuit protection.					a constant of the constant of	Switch set to 1	ui water jets		

^{*} Alternator Field Disconnect (AFD) protects the diodes in the alternator in the event of the switch being switched to the OFF position while the engine is running. If the AFD is not used to protect the alternator, an LED can be connected to the AFD terminals to indicate when the battery switch is in any position but OFF.

Switch set to 2

 $[\]ensuremath{^\ddagger}$ Reducing cable size will reduce current rating

	Selector 4 Position	1	Dual C	ircuit™	Dual Circ	uit Plus™
	olated battery banks to nes battery banks to all		Simultaneousl isolated ba		Simultaneously switched	
m-Series	⊘ -Series	HD-Series	m-Series	C -Series	m-Series	C -Series
6007	9001E, 9002E*	3002, 3003*	6010	5510E	6011	5511E
26	28	30	26	28	26	28
	2		2		2	
	Yes		_		Ye	
	Yes		-	-	Ye	es
900A	1,200A	1,600A	675A per circuit	700A per circuit	675A per circuit	700A per circuit
500A	600A	700A	450A per circuit	525A per circuit	450A per circuit	525A per circuit
300A	350A	500A	300A per circuit	350A per circuit	300A per circuit	350A per circuit
	32V DC		32V	DC	32V	DC
2.83" (72 mm) 2.83" (72 mm) 2.18" (55 mm)	3.85" (9 3.85" (9 3.00" (7		2.83" (72 mm) 2.83" (72 mm) 2.18" (55 mm)	3.85" (98 mm) 3.85" (98 mm) 3.00" (76 mm)	2.83" (72 mm) 2.83" (72 mm) 2.18" (55 mm)	3.85" (98 mm) 3.85" (98 mm) 3.00" (76 mm)
#10 (M5) Screws	1/4" (M6	s) Screws	#10 (M5) Screws	1/4" (M6) Screws	#10 (M5) Screws	1/4" (M6) Screws
3/8"-16 (M10)	3/8"-16 (M10)	1/2" (M12)	3/8"-16	5 (M10)	3/8"-16	6 (M10)
	7/8" (22 mm)	,	7/8" (2		7/8" (2	
120 in-lb (13.56 N-m)	140 in-lb (15.82 N-m)	220 in-lb (24.86 N-m)	120 in-lb (13.56 N-m)	, 140 in-lb (15.82 N-m)	120 in-lb (13.56 N-m)	, 140 in-lb (15.82 N-m)
(12.22.11.17)	Tin-plated copper	(=,	Tin-plate		Tin-plate	
	4/0 AWG (120 mm²)		4/0 AWG (120 mm²)	4/0 AWG (120 mm²)
1.12" (28.4 mm)	1.10" (2	7.9 mm)	1.12" (28.4 mm)	1.10" (27.9 mm)	1.12" (28.4 mm)	1.10" (27.9 mm)
	UL 1500, SAE J1171 tected against powerful		UL 1500, S	-	UL 1500, S IP66 - protected again	,
Switch set t	sv	vitch set to 2	Switch s	set to ON	Switch set	t to ON
	Switch set to 1+2	7.			Switch set to COM	BINE BATTERIES

Battery Management PanelsEasily manage multiple battery bank systems

- Isolates the Start circuit from the House circuit
- Allows emergency cross connect between isolated battery banks
- Protects electronics from sags and spikes caused by engine cranking

Meets UL 1500 and SAE J1171 external ignition protection requirements







PN	8280	8080
Description	Dual Battery Bank-Traditional Metal Panel	Dual Battery Bank-Traditional Metal Panel
Voltage Max. Operating	48V DC	48V DC
Circuit Breakers	_	1 × C-Series Flat Rocker, MAIN 100A (p. 81)
Battery Switches	3 × M Series, 6006 (p. 26)	2 × M Series, 6006 (p. 26)
Width x Height in (mm)	6.25 (158.75) × 7.50 (190.50)	5.25 (133.35) × 6.50 (165.10)
Depth in (mm)	2.25 (57.15)	3.00 (76.20)
Labels Included	Square Format Label Set 4218 (p. 152)	Square Format Label Set 4218 (p. 152)








PN	1408	8686	8690
Description	Dual Battery Bank - 360 Panel	Dual Battery Bank - Traditional Metal Panel	Dual Battery Bank - Traditional Metal Panel
Nominal Voltage	12V DC	12V / 24V DC	12V / 24V DC
24-hour circuits	3 unswitched	2 unswitched	2 unswitched
Circuit Breakers	1 × C-Series Flat Rocker, MAIN 100A (p. 81) 3 × Push Button Reset-Only, BRANCH 15A (p. 71)	1 × C-Series Flat Rocker, MAIN 100A (p. 81) 2 × Push Button Reset-Only, BRANCH 15A (p. 71) Spare apertures for additional Flat Rocker or Push Button Reset-Only	1 × C-Series Flat Rocker, MAIN 100A (p. 81) 2 × Push Button Reset-Only, BRANCH 15A (p. 71) Spare apertures for additional Flat Rocker or Push Button Reset-Only
Battery Switch	M Series, 6011200 (p. 26)	M Series, 6011 (p. 26)	E Series, 5511E (p. 28)
Width x Height in (mm)	4.88 (123.83) × 7.75 (196.85)	4.50 (114.30) × 7.50 (190.50)	5.25 (133.35) × 8.00 (203.20)
Depth in (mm)	3.50 (88.90)	3.25 (82.55)	3.00 (76.20)
LEDs	ON Indicating LEDs in all circuits	ON Indicating LEDs in all circuits	ON Indicating LEDs in all circuits
Labels Included	Square Format Label Set 4218 (p. 152)	24-hour Round Label Set 4140 Square Format Label Set 4218 (p. 152)	24-hour Round Label Set 4140 Square Format Label Set 4218 (p. 152)





	NOOM SECULATION SECURATION SECURATION SECUR	CENTRALIUS.
PN	8689	8693
Description	Triple Battery Bank - Traditional Metal Panel	Triple Battery Bank - Traditional Metal Panel
Nominal Voltage	12V / 24V DC	12V / 24V DC
24-hour circuits	3 unswitched	4 unswitched
Circuit Breakers	1 × C-Series Flat Rocker, MAIN 100A (p. 81) 3 × Push Button Reset-Only, BRANCH 15A (p. 71) Spare apertures for additional Flat Rocker or Push Button Reset-Only	1 × C-Series Flat Rocker, MAIN 100A (p. 81) 4 × Push Button Reset-Only, BRANCH 15A (p. 71) Spare apertures for additional Flat Rocker or Push Button Reset-Only
Battery Switches	2 × M Series, 6011 (p. 26)	2 × E Series, 5511E (p. 28)
Width x Height in (mm)	7.25 (184.15) × 8.00 (203.20)	10.50 (266.70) × 8.00 (203.20)
Depth in (mm)	3.25 (82.55)	3.50 (88.90)
LEDs	ON Indicating LEDs in all circuits	ON Indicating LEDs in all circuits
Labels Included	24-hour Round Label Set 4140 Square Format Label Set 4218 (p. 152)	24-hour Round Label Set 4140 Square Format Label Set 4218 (p. 152)



System diagram for 8686 and 8690

Related Products





SI-ACR p. 43

ML SOLENOID

7701

NT 35

L-Series Solenoid Switch

250A switch is remotely activated using a low amp switch and smaller gauge wire

- · Hermetically sealed contacts
- Activated by a remote ON-OFF switch 8230 (p. 88)
- Coil control circuit minimizes heating and amperage draw



Operating Temperature -55°C to +85°C Coil Circuit Connection 20 AWG Tinned Wire

Voltage Nominal 12/24V DC
Coil Function Normally Open

Operating Current 3.6A (when changing state)

0.13A @ 12V, 0.07A @ 24V (continuous)

Voltage Input 9V-36V DC Mounting Screws #10 or M5

Mounting Screw Torque 15-35 in-lb (1.7-4 Nm)

Weight 0.9 lb (0.41 kg)

Contact Rating:

Continuous Rating 300A*
Cranking Rating (30 sec.) 1,000A*
Voltage Maximum 800V DC

*2/0 Cable in 50° C ambient

Regulatory

CE marked for EC applications

Ignition protected - ISO 8846 and SAE J1171 UL Certified - UL 508 Industrial Control Equipment

IP67-protected against immersion up to 1 meter for 30 minutes (see inside back cover)

IGNITION PROTECTED

PN	Description
9012	L-Series Solenoid Switch

Related Product



ON-OFF Switch 8230 p. 88

Wire Size and Current Ratings

Wire Size	Cranking 30 sec.	Intermittent 5 min.	Continuous (UL 1107)
1/0 AWG	900A	275A	250A
2/0 AWG (70 mm²)	1000A	400A	300A
2× 2/0 AWG (2× 70 mm²)	1,450A	600A	450A

For the full list of specifications see page 48

TECH tip

Solenoid vs Remote Battery Switch

Solenoid: An electronic switch with no manual control, for circuits where a manual battery disconnect is offered elsewhere in the circuit.

Remote Battery Switch: A solenoid or relay with a manual control switch allowing for switching if control circuit is compromised and for service lockout.

ML-Series Solenoid Switches

500A magnetic latching solenoid provides switching under load where manual control is not required



Remote Control Contura Switch included in retail package



Duetch DTM Cable End now offered for both retail and bulk units. Other connector plugs are available for high volume OEM applications.

• Silver alloy contacts provide high reliability for switching live loads

 LED output to remotely indicate switch state - requires optional LED (p. 151) or Remote Control Contura Switch with integrated LED (included in retail package)

• 3/8"-16 tin-plated copper studs for maximum conductivity and corrosion resistance

- One-piece stainless flange nuts ensure safe and secure connections
- · Label recesses for circuit identification
- Retail package includes Remote Control Contura Switch (p. 89)

Regulatory

CE marked, meets ISO 8846 and SAE J1171 external ignition protection requirements IP66 - protected against powerful water jets (see inside back cover)

IGNITION PROTECTED

PN	Conta Voltag		Control Voltage	Signal Voltage	Cable End
7701	0-64V	UPDATED	9-16V	12V Momentary	Stripped Wire
7701100	0-64V	UPDATED	9-16V	12V Momentary	Deutsch DTM
7703	0-64V	UPDATED	18-32V	24V Momentary	Stripped Wire
7703100	0-64V	UPDATED	18-32V	24V Momentary	Deutsch DTM

Wire Size and Current Ratings

Wire Size	Cranking 30 sec.	Intermittent 5 min.	Continuous (UL 1107)
2/0 AWG (70 mm²)	1,000A	400A	225A
4/0 AWG (120 mm²)	1,100A	400A	300A
2× 4/0 AWG (2x 120 mm²)	1,450A	700A	500A

For the full list of specifications see page 48 For the dimensioned drawing see page 39

Related Products



Paralleling Link Bus p. 39 (see table)



Remote Control Contura Switches p. 89



LEDs p. 151



Stud Mount Insulators p. 104

VIDEO

M-LVD Low Voltage Disconnect

Senses low battery voltage and disconnects non-critical loads, saving power to start engine





Remote Control Contura Switch included in retail package

- Status light provides visual warning of low voltage state prior to disconnect
- · Alarm output for audible warning of low voltage state prior to disconnect (optional alarm required)
- One-piece stainless flange nuts ensure safe and secure connections
- Remote Control Switch functions:
 - Adjusts disconnect voltage
 - Temporarily delays circuit disconnect for 10 minutes
 - Temporarily disconnects circuits until voltage rises
 - Silences alarm (optional alarm required)
- Includes Remote Control Switch 7928 (p. 88)

Intermittent Rating: 5 min. 115A Continuous Rating 65A Nominal Voltage 12V DC

Cable Size (to meet current ratings) 6 AWG (16mm²) 1/4"-20 (M6) Terminal Stud Size

Disconnect Voltage 11.3V-12.1V Adjustable

Reconnect Voltage 13V DC


Regulatory

Meets ISO 8846 and SAE J1171 external ignition protection requirements

PROTECTED

PN	Description
7635	m-LVD Low Voltage Disconnect

For the full list of specifications see page 49



Mounting Options



System Diagram



Common Applications



12V Outlets Refrigerator Stereo

Also serves as a low voltage monitor

Related Products



Low Voltage Disconnect Switch p. 88



Floyd Bell Turbo Series Alarm p. 150



Automatic Timer Disconnect (ATD)

Select from 4 methods to manage your batteries: Timer Disconnect, Low Voltage Disconnect, Automatic Charging Relay, or Solenoid

Timer Disconnect

- 12V signal triggers relay to connect battery power to devices
- When signal is removed the timer is activated and will disconnect devices after a preset time
- Timer ranges from 15 minutes to 4 hours
- Optional charge sense can be used instead of 12V signal to reduce wiring
- Test mode disconnects devices after 5 seconds to confirm relay and timer are operational

Low Voltage Disconnect

- · Senses low battery voltage and automatically disconnects devices to save power
- Adjustable voltage setting at 11.0V, 11.5V, or 12.0V
- Low voltage setting can be used in conjunction with timer disconnect
- Low voltage will disconnect devices prior to preset time to preserve battery power

Automatic Charging Relay

- Automatically combines two battery banks for charging off a single charging source (i.e. alternator)
- Isolates batteries when charging source is not present or discharging
- Single side sensing design only monitors the voltage of the start battery
- Ideal for auxiliary batteries that are AGM or larger than the start battery

Solenoid

• 12V signal will connect or disconnect relay without any time delay

Nominal Voltage 12V DC
Input Voltage Range 9.5–16V
Continuous Rating 120A
Intermittent Rating: 5 min. 210A
Amperage Operating Current (Combine) 175mA
Amperage Operating Current (Open) 4mA

Cable Size to Meet Current Ratings 1 AWG (50mm²)

Maximum Cable Size 1/0 AWG (50mm²)

Terminal Stud Size 3/8"-16 (M10)

Terminal Stud Torque 140 in-lb (15.82Nm)

Time Range 15 Minutes – 4 Hours

Regulatory

CE marked, Meets ISO 8846 and SAE J1171 external ignition protection requirements IP67-protected against immersion up to 1 meter for 30 minutes (see inside back cover)




PN	Description	
7615	Automatic Timer Disconnect	

For the full list of specifications see page 49





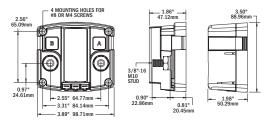



MRBF Terminal Fuse Blocks






Remote Battery Switches

A Remote Battery Switch (RBS) is a 500A relay and remote control switch connected by small gauge single wire. High amperage switching is achieved with the relay mounted next to the batteries and controlled either manually by a switch on the remote battery switch or by the remote switch mounted in an accessible location. Read the TECH Tip, Solenoid vs Remote Battery Switch RBS Explained on page 35.

The installed cost of a remote battery compared to manual battery switch may not be that different. The cost savings from eliminating long runs of expensive large gauge battery cables and replacing them with light gauge control wires can often offset the cost of a remote battery switch.


4 Position Selector Switch

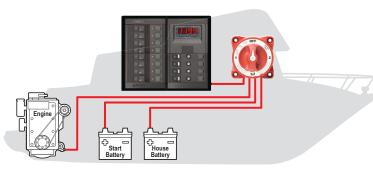

Traditional Battery Switch (40' of 4/0 AWG Cable)

- · Long runs of large cable create voltage drop
- · Decreased power to engine
- Increases weight
- More expensive

ML-Series Remote Battery Switches and Automatic Charging Relay

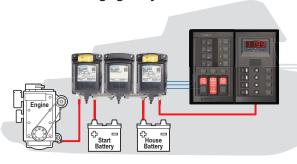


Remote Battery Management with small control wire (5' of 4/0 AWG Cable)

- Minimizes cable run and voltage drop
- · Maximizes power to engine
- · Reduces weight
- Saves money



Mastervolt Lithium Ion Battery System

Mastervolt utilizes Blue Sea Systems ML Remote Battery Switches (ML-RBS) on their Lithium Ion Battery systems. The advanced Lithium Ion Batteries have a built in Battery Management System (BMS) with active cell balancing. The ML-RBS is utilized for its rapid ability to disconnect the batteries under full load. At any time the Mastervolt BMS can trigger the ML-RBS to safely disconnect the batteries. Once the system is restored the ML-RBS can be re-connected for quick operation. The latching operation of the ML-RBS means that no amperage is consumed during an open or closed state, which further prolongs the available power in the Lithium Ion Batteries. The override knob allows the ML-RBS to be manually disconnected for safe servicing of the battery system. With a rating of 500A continuous, the ML-RBS pairs perfectly with all of the Mastervolt Lithium Ion Batteries.

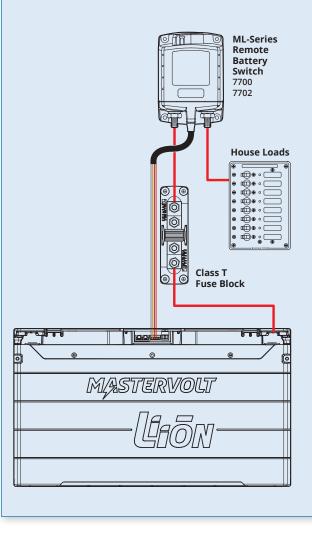

ML-Series Remote Battery Switches

500A magnetic latching switch provides high amperage switching under load, manually or from remote locations

- · Silver alloy contacts provide high reliability for switching live loads
- LED output to remotely indicate switch state requires optional LED (p. 151) or Remote Control Contura Switch with integrated LED (included in retail package)
- 3/8"-16 tin-plated copper studs for maximum conductivity and corrosion resistance
- One-piece stainless flange nuts ensure safe and secure connections
- · Label recesses for circuit identification
- Retail package includes a Remote Control Contura Switch (p. 89)

Terminal Stud Size 3/8"-16 (M10) Maximum Terminal Stud Torque 140 in-lb (15.8 N·m) Cable Size to Meet Rating 4/0 AWG (120mm²) Terminal Ring Diameter Clearance 1.12" (28.4 mm)

Regulatory

CE marked, meets ISO 8846 and SAE J1171 external ignition protection requirements IP66 - protected against powerful water jets (see inside back cover)




Wire Size and Current Ratings

Wire Size	Cranking 30 sec.	Intermittent 5 min.	Continuous (UL 1107)
2/0 AWG (70 mm²)	1,000A	400A	225A
4/0 AWG (120 mm²)	1,100A	400A	300A
2× 4/0 AWG (2x 120 mm²)	1,450A	700A	500A

PN	Contact Voltage	Control Voltage	Signal Voltage	Cable End
7700	0-64V UPDATED	9-16V	12V Momentary	Stripped Wire
7700100	0-64V UPDATED	9-16V	12V Momentary	Deutsch DTM
7702	0-64V UPDATED	18-32V	24V Momentary	Stripped Wire
7702100	0-64V UPDATED	18-32V	24V Momentary	Deutsch DTM
7713	9-16V	9-16V	12V Continuous	Stripped Wire
7713100	9-16V	9-16V	12V Continuous	Deutsch DTM
7717	18-32V	18-32V	24V Continuous	Stripped Wire
7717100	18-32V	18-32V	24V Continuous	Deutsch DTM
9160	Paralleling link bus			

For the full list of specifications see page 48





Remote Control Contura Switch included in retail package



Duetch DTM Cable End now offered for both retail and bulk units. Other connector plugs are available for high volume OEM applications.

Related Products



Paralleling Link Bus 9160 see table



ML-Series ACR



Battery Management Pánels p. 90



Stud Mount Insulators





TECH tip


ML-Series Solenoid & RBS Update

A number of ML-Series Solenoids and Remote Battery Switches are now rated to 64V DC, making them ideal for use in 36V DC and 48V DC nominally-rated systems. The new 64V DC rating applies only to the contact voltage, while maintaining the existing 12V DC or 24V DC signal voltage, making them ideal for use in multi-voltage systems like solar or golf-carts. The new higher voltage rating was tested to 2,000 live-switching cycles at maximum operating voltage per UL 1107 requirements.

Intro to Automatic Charging Relays

Automatic Charging Relay Operation

BATTERY TERMINAL VOLTAGE

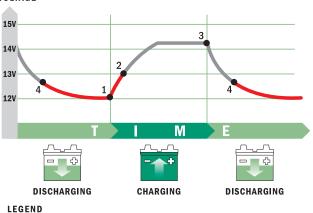

ACR OPEN - Batteries are isolated.

ACR COMBINED - Batteries are connected and are both charging.

- 1. ACR relay is open and batteries are isolated. Voltage begins to rise slowly after engine starts or battery charger is turned on.
- 2. When voltage rises to COMBINE voltage 13.0V in this example, ACR relay closes, connecting and charging both batteries.
- 3. When engine stops or battery charger is turned off, voltage rapidly begins falling.
- 4. When voltage falls to ISOLATE voltage 12.75 in this example ACR relay opens, isolating batteries while discharging.





Back Cove Yachts installs the SI ACR as original equipment aboard their yachts, including the Back Cove 37.

тесн tip.

Automatic Charging Relays

In a boat or vehicle with two battery banks, it is useful to be able to charge both banks while underway. Charge management devices allow two battery banks to be charged from a single source, such as an alternator, but keep batteries isolated when not charging. If one battery becomes depleted, there will be a charged bank available for emergency starting.

There are two types of charge management devices used on boats: Automatic Charging Relays (ACR) use a relay combined with a voltage sensing circuit. When a charge is being applied to a battery and the voltage rises over 13V DC, the relay closes and combines the two batteries. When the charge is taken away or the load on the battery is greater than the charging input causing the voltage to drop to 12.75V DC, the relay opens and isolates the two batteries.

Battery Isolators are one-way electrical check valves that allow current to flow to, but not from, the battery. Their disadvantage is that they use diodes, which cause a voltage drop that consumes charging energy, creates heat, and causes batteries to be undercharged. Although alternators with external voltage sensing can correct for undercharging, voltage drop and heat remain a problem.

Zero Drop Isolators have more recently been developed to address the voltage drop issue of the traditional isolator but often have a higher price than either of the other two options mentioned above.

Automatic Charging Relay vs. Battery Isolator

Automatic Charging Relay


A lower voltage drop replacement for battery isolators .05V Drop - Batteries Fully Charged



An ACR passes the current from one battery to the other

Battery Isolator

.6V Drop - Batteries Under Charged

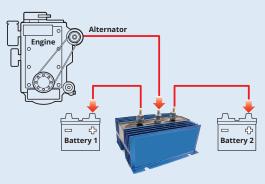

An isolator splits the current

Selection Chart

bluesea.com

Choose the right Automatic Charging Relay for your application

 Select an ACR that has a CONTINUOUS rating above the maximum alternator output rating and an INTERMITTENT rating that is above the largest load on the auxiliary battery.












- 2. Review the PRESET ACR SETTINGS
- 3. Select the ACR with the desired PRODUCT FEATURES

PN	7601	7611	7610	7620	7622
CONTINUOUS	65A	120A	120A	500A	500A
INTERMITTENT	115A	210A	210A	700A	700A

PRESET ACR SETTINGS

Combine Voltage

- Charge present and loads do not exceed charge input
- Voltage of either battery is ≥13.0V for 2 min.
- Relay will close, combining batteries
- Combined batteries share charge











Open Voltage

- No charge present or loads exceed charge input
- Combine voltage is ≤12.75V for 30 sec.
- Relay will open, isolating batteries
- Isolated batteries do not share charge

ACR ≤12.75V for 30 sec. Start Auxiliary









Under Voltage Lockout

- Charge may or may not be present
- Voltage of either battery is ≤9.5V (ML-ACR 9.6V)
- Relay will not close even with charge on other battery, protecting ACR and wiring from high surge current
- Isolated batteries do not share charge

ACR System ACR System Auxiliary








PRODUCT FEATURES

Auxiliary Battery Priority (optional) Condition: Engine running

- Open voltage is lowered to 12.25V from 12.75V

 Relay remains closed longer, combining batteries, to allow use of auxiliary loads for a longer period of time









Start Isolation (optional)

Condition: Engine starting

- Relay is open, isolating batteries
- Batteries are isolated to protect sensitive electronics from voltage sags and spikes

ACR D










Start Assist

Condition: Engine starting - (Press Contura Switch)

- Relay is closed, combining batteries
- Batteries are combined to share power in the event of a low start battery








Engine Isolation

Condition: Two engines are running

- One relay is open and one relay is closed
- Engine 1 Start and Engine 2 Start batteries are isolated to protect engine electronics
 - If requested by engine manufacturer







Manual Override

Manual override knob provides an added level of safely allowing manual control of ON-OFF







M-ACR Automatic Charging Relay

with optional Start Isolation

Automatically combines batteries during charging, isolates batteries when discharging and when starting engines

- · 65 Amp continuous rating
- 12V/24V DC auto ranging voltage input
- Senses charging on two battery banks
- Case design allows surface, rear, or front panel mounting options
- Snap-on cover insulates terminal connections
- · One-piece stainless flange nuts ensure safe and secure connections
- Integrated LED indicates ACR states
- · Quick connect terminals for ground and start isolation
- Optional Start Isolation allows temporary isolation of House loads from Engine circuit during engine cranking to protect sensitive electronics from sags and spikes

Intermittent Rating: 5 min. 115A Continuous Rating 65A Amperage Operating Current (Combine) 90mA Amperage Operating Current (Open) 15mA Nominal Voltage 12V / 24V DC Cable Size to meet current ratings 6 AWG (16mm²) Maximum Cable Size 1/0 AWG (50mm²) Terminal Stud Size 1/4"-20 (M6) Terminal Stud Length 7/16" (11 mm)

Relay Contact Position 12V DC 24V DC Combine 27.2V DC (30 sec.) 13.6V DC (2 min.) 26.0V DC 13.0V DC (10 sec.) 12.35V DC 24.7V DC Open (30 sec.) 12.75V DC 25.5V DC Over Voltage Lockout 16.0V DC


Under Voltage Lockout 9.5V DC 19.0V DC
Under Voltage Recovery 10.0V DC 20.0V DC


Regulatory


CE marked, ISO 8846, meets SAE J1171 external ignition protection requirements IP67 - protected against immersion up to 1 meter for 30 minutes (see inside back cover)


PN	Description
7601	m-ACR Automatic Charging Relay

For the full list of specifications see page 49

















Mounting Options





m-Series Battery Switch p. 26



Mini Add-A-Battery p. 44



MRBF Terminal Fuse Blocks p. 64



WeatherDeck OFF-ON Toggle Switch p. 92

SI-ACR Automatic Charging Relay

with optional Start Isolation

Automatically combines batteries during charging, isolates batteries when discharging and when starting engines

- 120A continuous rating to support high output alternators
- 12V/24V DC auto ranging voltage input
- · Senses charging on two battery banks
- Side and bottom knockouts for cable connections
- · Clip-on cover insulates terminal connections
- · Studs accept multiple cable terminals
- · One-piece stainless flange nuts ensure safe and secure connections
- Integrated LED indicates ACR status
- Quick connect terminals for ground and optional features
- · Optional Start Isolation allows temporary isolation of House loads from Engine circuit during engine cranking to protect sensitive electronics from sags and spikes
- Remote LED indicates ACR states requires optional LED (p. 151)

210A Intermittent Rating: 5 min. 120A Continuous Rating Amperage Operating Current (Combine) 175mA Amperage Operating Current (Open) 15mA Nominal Voltage 12V / 24V DC Cable Size to Meet Current Ratings 1 AWG (50mm²) Maximum Cable Size 1/0 AWG (50mm²) Terminal Stud Size 3/8"-16 (M10) **Relay Contact Position** 12V DC **24V DC** 13.6V DC (30 sec.) 13.0V DC (2 min.)

27.2V DC Combine 26.0V DC Open (10 sec.) 12.35V DC 24.7V DC (30 sec.) 12.75V DC 25.5V DC Over Voltage Lockout 16.0V DC 30.0V DC 9.5V DC 19.0V DC Under Voltage Lockout 10.0V DC 20.0V DC Under Voltage Recovery

Regulatory

CE marked, ISO 8846, meets UL 1500 and SAE J1171 external ignition protection requirements IP67 - protected against immersion up to 1 meter for 30 minutes (see inside back cover)

PN	Description
7610	SI-ACR Automatic Charging Relay

For the full list of specifications see page 49 For the dimensioned drawing see page 37













C-Series Battery Switch



MRBF Terminal p. 64



Add-A-Battery



WeatherDeck OFF-ON Toggle Switch p. 92







Mini Add-A-Battery Kit

Simplifies switching and automates charging for a 65A, two battery bank solution for outboard powered boats

- · For alternators up to 65A
- Includes the m-Series Dual Circuit Plus Battery Switch 6011 (p. 26) and the m-ACR Automatic Charging Relay 7601 (p. 42)

m-Series Dual Circuit Plus™ Battery Switch

- Switches two battery banks simultaneously while maintaining battery bank isolation
- Can combine two battery banks in the event of a low start battery
- IP66 protected against powerful water jets (see inside back cover)

m-ACR Automatic Charging Relay

- Automatically combines battery banks when charging and isolates when discharging
- · Start isolation protects sensitive electronics
- · Dual Sensing senses charge on two battery banks
- IP67 protected against immersion up to 1 meter for 30 minutes (see inside back cover)

PN	Description	Retail Package
7649	Mini Add-A-Battery Kit	Clam
76/10003	Mini Add-A-Ratteny Kit	Boy









Add-A-Battery Kit

Simplifies switching and automates charging for a 120A, two battery bank solution for inboard and outboard powered boats

- For alternators up to 120A
- Includes the ℰ-Series Dual Circuit Plus Battery Switch 5511E (p. 28) and the SI-ACR Automatic Charging Relay 7610 (p. 43)

C-Series Dual Circuit Plus™ Battery Switch

- Switches two battery banks simultaneously while maintaining battery bank isolation
- Can combine two battery banks in the event of a low start battery
- IP66 protected against powerful water jets (see inside back cover)

SI-ACR Automatic Charging Relay

- Automatically combines battery banks when charging and isolates when discharging
- Start isolation protects sensitive electronics
- Dual Sensing senses charge on two battery banks
- IP67 protected against immersion up to 1 meter for 30 minutes (see inside back cover)

PN	Description	Retail Package
7650	Add-A-Battery Kit	Clam
7650003	Add-A-Battery Kit	Box







Related Products



m-Series Battery Switch p. 26



m-ACR p. 42



WeatherDeck OFF-ON Toggle Switch p. 92



⊘-Series Battery Switch p. 28



SI-ACR p. 43



MRBF Terminal Fuse Blocks p. 64



WeatherDeck OFF-ON Toggle Switch p. 92




Add-A-Battery Kits Explained

Avoid the inconvenience and cost of a tow by adding a second battery to your electrical system.


The Add-A-Battery Kits include a Dual Circuit Plus™ Battery Switch and an Automatic Charging Relay. These components simplify switching and automate charging. Simply turn the battery switch ON when you arrive and OFF when you leave.

Adding a second battery prevents getting stranded with a dead battery by isolating the Start battery from the House loads that can quickly discharge a battery. The Add-A-Battery Kits offer a simple way to control switching with the Dual Circuit Plus™ Battery Switch and automatically shares a single source of charging between two batteries with the Automatic Charging Relay.

ENGINE ON

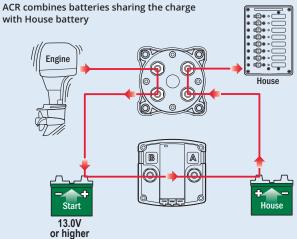

ENGINE OFF

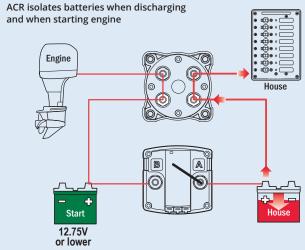

DC Current



The diagrams above illustrate how the 7650 and 7649 Add-A-Battery Kits work and are intended for reference only. Consult an ABYC certified marine electrical professional for system design and circuit protection.

Mini Add-A-Battery Plus Kits

A complete small boat battery management system. Charge two batteries at or away from the dock.

- For alternators up to 65A
- Includes an m-Series Dual Circuit Plus™ Battery Switch 6011 (p. 26) and a BatteryLink® Charger (p. 18)

m-Series Dual Circuit Plus Battery Switch

- Switches two battery banks simultaneously while maintaining battery bank isolation
- Can combine two battery banks in the event of a low start battery
- IP66 protected against powerful water jets (see inside back cover)

BatteryLink Charger

- Integrated ACR provides DC charging from engine alternator
- · AC plug-in while at the dock
- · Battery temperature compensation prolongs battery life
- Includes a remote LED indicator
- Start isolation protects sensitive electronics
- IP67 protected against immersion up to 1 meter for 30 minutes (see inside back cover)

PN	Description	Plug Style
7655	Mini Add-A-Battery Plus Kit	North American: NEMA 5-15P
7654	Mini Add-A-Battery Plus Kit	European: CEE 7/7
7653	Mini Add-A-Battery Plus Kit	Bare wire







Related Products



BatteryLink Chargers p. 18

For the AC & DC Battery Charging Explained TECH Tip see page 18



m-Series Battery Switch

BatteryLink® Automatic Charging Relay (ACR)

with optional Auxiliary Battery Priority

Automatically shares single source of charge with Auxiliary Battery

- 120A continuous rating to support high output alternators
- 12V/24V DC auto ranging voltage input
- Senses charging on two battery banks
- Side and bottom knockouts for cable connections
- · Clip-on cover insulates terminal connections
- · Studs accept multiple cable terminals
- · One-piece stainless flange nuts ensure safe and secure connections
- · Integrated LED indicates ACR status
- · Quick connect terminals for ground and optional features
- Optional Auxiliary Battery Priority connection shares the alternator charge with the Auxiliary battery longer when the engine is running to allow the use of auxiliary loads for an extended period of time
- Remote LED remotely indicates ACR states requires optional LED (p. 151)

Intermittent Rating: 5 min. **Continuous Rating** 120A Amperage Operating Current (Combine) 175mA Amperage Operating Current (Open) 15_mA Nominal Voltage 12V / 24V DC Cable Size to Meet Ratings 1 AWG (50mm²) Maximum Cable Size 1/0 AWG (50mm²) Terminal Stud Size 3/8"-16 (M10) Maximum Battery Size 850 CCA

Relay Contact Position 12V DC 24V DC 27.2V DC Combine (30 sec.) 13.6V DC 13.0V DC 26.0V DC (2 min.) (30 sec.) Open Low 12.75V DC 25.5V DC Over Voltage Lockout 16.0V DC

Optional Auxiliary Priority

Open Low (30 sec.) 12.25V DC 24.5V DC

Regulatory

CE marked, ISO 8846, UL 1500, meets SAE J1171 external ignition protection requirements IP67 - protected against immersion up to 1 meter for 30 minutes (see inside back cover)

PN Description
7611 BatteryLink ACR

For the full list of specifications see page 49 For the dimension drawing see page 37













⊘-Series Battery Switch n 28



WeatherDeck OFF-ON Toggle Switch p. 92



MRBF Terminal Fuse Blocks p. 64





ML-Series Automatic Charging Relays (ACR)

500 Amp magnetic latching relay automatically combines batteries during charging and isolates batteries when discharging and when starting engine

- Magnetic Latching (ML) relay draws very low current in the ON state
- Start Isolation (SI) can be configured for temporary isolation of House loads from Engine circuit during engine cranking to protect sensitive electronics
- Engine Isolation (EI) can be configured for isolation of two engines while both are running to protect engine electronics and maximize alternator output
- · Manual override knob provides an added level of safety allowing control with or without power and offering LOCKED OFF capability for servicing
- · Senses charging on two battery banks
- LED output to remotely indicate switch state requires optional LED (p. 151) or Remote Control Contura Switch with integrated LED (included in retail package)
- 3/8"-16 tin-plated copper studs for maximum conductivity and corrosion resistance
- One-piece stainless flange nuts ensure safe and secure connections Silver alloy contacts provide high reliability for live switching
- Retail packaging includes a Remote Control Contura Switch (p. 89)

Live Current Switching		300A @ 12V D	300A @ 12V DC-10,000 Cycles		
Relay Cont	act Position	12V DC	24V DC		
Combine	(30 sec.)	13.5V DC	27.0V DC		
	(2 min.)	13.0V DC	26.0V DC		
Open	(10 sec.)	12.35V DC	24.7V DC		
	(30 sec.)	12.75V DC	25.5V DC		
Over Voltage Lockout		16.2V DC	32.4V DC		
Under Volt	age Lockout	9.6V DC	19.2V DC		
Under Volt	age Recovery	10.0V DC	20.0V DC		

Regulatory

CE marked, meets ISO 8846 and SAE J1171 external ignition protection requirements IP66 - protected against powerful water jets (see inside back cover)



Remote Control Contura Switch included in retail package



PROTECTED

Wire Size and Current Ratings

Wire Size	Cranking 30 sec.	Intermittent 5 min.	Continuous (UL 1107)
2/0 AWG (70 mm²)	1,000A	400A	225A
4/0 AWG (120 mm²)	1,100A	400A	300A
2× 4/0 AWG (2x 120 mm²)	1,450A	700A	500A

PN	Coil Volts	Cable End	Manual Control
7620	12V DC	Stripped Wire	No
7620100	12V DC	Deutsch DTM	No
7622	12V DC	Stripped Wire	Yes
7622100	12V DC	Deutsch DTM	Yes
7621	24V DC	Stripped Wire	No
7621100	24V DC	Deutsch DTM	No
7623	24V DC	Stripped Wire	Yes
7623100	24V DC	Deutsch DTM	Yes

For the full list of specifications see page 49 For the dimension drawing see page 39



Duetch DTM Cable End now offered for both retail and bulk units. Other connector plugs are available for high volume OEM applications.

Related Products



ML-Series Remote **Battery Switches** p. 39



MRBF Terminal Fuse Blocks p. 64



Battery Management p. 90



Paralleling Link Bus p. 39 (see table)



LEDs p. 151



Stud Mount Insulators



ML-ACR AUTOMATIC CHARGING RELA

Solenoid and Remote Battery Switch Specification Table

Product Type	Solenoid Switches			Remote Battery Switches (RBS)				
Function	Provides high-amp switching		Provides high-amp switching with manual override					
Product	L-Series Solenoid	ML-Series Solenoid			ML-Ser	ries RBS		
		ENTERNA BIOLEMON DE LA CONTRA BIOLEMON DE LA	EMPRIA MOLENOID IN THE TEXT OF		TO SECOND			
PN	9012	7701	7703	7700	7702	7713	7717	
Page Number	35	35	35	39	39	39	39	
Manual Control				Yes	Yes	Yes	Yes	
Nominal Voltage	12V/24V DC	12V DC	24V DC	12V DC	24V DC	12V DC	24V DC	
Operating Voltage (contacts)	9-36V	0-64V UPDATED	0-64V UPDATED	0-64V UPDATED	0-64V UPDATED	9-16V	18-32V	
Control Voltage	8.5-36V	9-16V	18-32V	9-16V	18-32V	9-16V	18-32V	
Cranking Rating (30 sec.)	1,000A DC	1,450A DC 1,450			1,450	DA DC		
Intermittent Rating (5 min.)	400A DC	700	N DC	700A DC				
Continuous Rating	300A DC	500	DC	500A DC				
Amperage Operating Current - continuous @ 25°C nominal VDC	0.13A @ 12V DC 0.07A @ 24V DC	0n	0mA 0mA		< 13mA			
Amperage Operating Current - when changing state	3.6A DC	< 7.0A DC	< 4.0A DC	< 7.0A DC	< 4.0A DC	< 7.0A DC	< 4.0A DC	
Switching Cycles	300,000	100,	000		100	,000		
Live Switching Cycles	10,000 @ 12V, 300A 10,000 @ 24V, 300A	10,000 @ 10,000 @ 2000 @ 4	24V, 150A	10,000 @	12V, 300A 24V, 150A 48V, 100A	10,000 @ 12V, 300A	10,000 @ 24V, 150A	
Control Signal	Continuous	Mome	entary	Mome	entary	Conti	nuous	
Coil Function	Normally Open	Magnetic Latc	hing Bi-Stable	Magnetic Late	atching Bi-Stable Magnetic Latching Auto-Releasing		g Auto-Releasing	
Remote Control Switch Included		21 SPDT (ON)			45)-OFF-(ON)	2155 SPDT ON-ON		
Control Circuit Connection	Tinned Wire	Tinned Wire or De	eutsch Connector	Tinned Wire or D	eutsch Connector	Tinned Wire or Deutsch Connector		
Mounting	#10 or M5	#10 0	r M5	#10	or M5	#10 or M5		
Terminal Stud Size	5/16" (M8	3/8"-16	(M10)	3/8"-10	6 (M10)	3/8"-16 (M10)		
Terminal Stud Length	5/8" (16 mm)	7/8" (2	2 mm)	7/8" (2	22 mm)	7/8" (2	2 mm)	
Maximum Terminal Stud Torque	90 in-lb (10.0 Nm)	140 in-lb (15.5 Nm)	140 in-lb	(15.5 Nm)	140 in-lb	(15.5 Nm)	
Cable Size to Meet Ratings	2/0 AWG (70mm²)	4/0 AWG (12	20 mm²) × 2	4/0 AWG (1	4/0 AWG (120 mm²) × 2 4/0 AWG (120 mm²) × 2		20 mm²) × 2	
Terminal Ring Diameter Clearance	not rated	1.12" (28	3.4 mm)	1.12" (2	8.4 mm)	1.12" (2	8.4 mm)	
Width	3.17" (80.50 mm)	3.75" (9	5.2 mm)	3.75" (95.2 mm)		3.75" (9	5.2 mm)	
Height	2.63" (66.80 mm)	5.47" (13	8.9 mm)	5.47" (13	38.9 mm)	5.47" (13	38.9 mm)	
Depth	2.86" (72.64 mm)	2.03" (5	1.6 mm)	2.03" (5	1.6 mm)	2.03" (5	1.6 mm)	
Ignition Protected	ISO 8846 SAE J1171	ISO 8846,	SAE J1171		ISO 8846,	SAE J1171		
Ingress Protected (see inside back cover)	IP67 - protected against immersion up to 1 meter for 30 minutes	IP66 - prote powerful			IP66 - protected again	nst powerful water jets		

Non-Critical Load Disconnect and Automatic Charging Relay Specification Table

Non-critical Load Disconnects Automat			ic Charging Rel	ays (ACR)				
Disconnects non- critical loads after a set voltage	Disconnects non-critical loads after a set time		Allo	ows charging of mul	tiple batteries from a single charge source			
m-LVD	ATD	m-ACR	SI-ACR	BatteryLink ACR		ML-Ser	ies ACR	
Parties Barrier Barrie	D PWF FFA	The second secon	BACR BUYER	D PUT SEA	MACRI BILLIAN	AND THE STATE OF T	ANUTED AND AND AND AND AND AND AND AND AND AN	
7635	7615	7601	7610	7611	7620	7622	7621	7623
36	37	42	43	46	47	47	47	47
						Yes		Yes
12V DC	12V DC	12V/24V DC	12V/24V DC	12V/24V DC	12V DC	12V DC	24V DC	24V DC
			-	-				
						1,450)A DC	
115A DC	210A DC	115A DC	210	A DC		700/	A DC	
65A DC	120A DC	65A DC	120	A DC	500A DC			
4mA open 95mA connected	15mA open 175mA connected	15mA open 90mA combined		open combined	< 13mA			
	< 7.0A DC			A DC	< 4.1	DA DC		
					100	.000		
				ı				
		Normally Open				Magnetic Lato	hing Bi-Stable	
SPDT (ON)-OFF-(ON)						21	46	
3. 3. (011) 011-(011)						SPDT ON	I-OFF-ON	
	1/	4" Quick Connect				Tinned Wire or De	eutsch Connector	
#10 or M5	#8 or M4	#10 or M5	#8 0	or M4		#10 0	or M5	
1/4"-20 (M6)	3/8"-16 (M10)	1/4"-20 (M6)	3/8"-1	5 (M10)		3/8"-16	5 (M10)	
7/16" (11 mm)	7/8" (22 mm)	7/16" (11 mm)	7/8" (2	22 mm)		7/8" (2	2 mm)	
60 in-lb (6.8 Nm)	140 in-lb (15.8 Nm)	60 in-lb (6.8 Nm)	140 in-lb	(15.8 Nm)	140 in-lb (15.8 Nm)			
6 AWG (16 mm²)	1/0 AWG (50 mm²)	6 AWG (16 mm²)	1/0 AWG	(50 mm²)	4/0 AWG (120 mm²) × 2			
0.80" (20.3 mm)	1.05" (26.7 mm)	0.80" (20.3 mm)	1.05" (2	6.7 mm)	1.12" (28.4 mm)			
2.85" (72.3 mm)	3.89" (98.7 mm)	2.85" (72.3 mm)	3.89" (9	8.7 mm)		3.75" (9	5.3 mm)	
2.85" (72.3 mm)	3.50" (89.0 mm)	2.85" (72.3 mm)	3.50" (8	9.0 mm)		5.47" (13	8.9 mm)	
2.57" (65.2 mm)	1.98" (50.3 mm)	2.57" (65.2 mm)	1.98" (5	0.3 mm)		2.03" (5	1.6 mm)	
ISO 8846 SAE J1171	ISO 8846 SAE J1171	ISO 8846 SAE J1171		5, UL1500 1171		ISO 8846,	SAE J1171	
IP67 - protected against immersion up to 1 meter for 30 minutes	IP66 - protected against powerful water jets		otected against imme 1 meter for 30 minu		IP66 - protected against powerful water jets			ts

CIRCUIT PROTECTION & SWITCHES

Fuses

52



Available in amperage ranges of .25A in the smallest glass fuse to 750A in a fuse intended to provide DC Main protection on large battery banks.

Fuses Holders



In-line fuse holders are compact and hold a single low-amperage fuse.

ST-Blade Water-Resistant Fuse Block





Provides water-resistant circuit protection for ATO/ATC fuses & circuit breakers in a compact footprint. The single side nesting design allows for wire entry from one side to maximize space.

Fuse Blocks



Fuse blocks mount to a solid surface and may hold a single fuse or multiple fuses.

Circuit Breaker Blocks





Innovative block designed for Push-Button CLB Circuit Breakers with quick connect terminals. Easily snap circuit breakers into place. Common Source versions eliminate the need for a wiring harness.



Best practices recommend every wire, except the engine starting circuit, have circuit protection.

When excessive current flows in an electrical circuit, wire insulation can melt and possibly start a fire. Circuit breakers and fuses protect the wire in electrical circuits. Blue Sea Systems' selection of circuit breakers, fuses, fuse holders, and fuse blocks offer a range of choices for main and branch circuit protection. To help in the selection process, Blue Sea Systems developed the Circuit Wizard to determine the correct size wire and fuse or circuit breaker for the application. Go to circuitwizard.bluesea.com to download the app.

CIRCUIT PROTECTION & SWITCHES

ATO/ATC-Style Circuit Breakers

73

NEW



Use a manually resettable circuit breaker instead of an ATO or ATC fuse

Thermal Circuit Breakers





Circuit breakers offer the ability to reset instead of replace the device after a fault. Available circuit breakers include styles with and without switching, and for DC and AC systems.

UL-489 Circuit Breakers





Circuit breakers offer the ability to reset instead of replace the device after a fault. Available circuit breakers include styles with and without switching, and for DC and AC systems.

Surface Mount Systems





Panel enclosure for ELCI Main circuit breakers and other large frame devices. Meets ABYC E-11 when used with an ELCI Main circuit breaker and mounted within 10 feet of the shore power inlet.

Switches





Switching options for different apertures and configurations.



TECH tip.

Color Coding

The circuit protection color coded packaging matches fuses with the corresponding fuse holder or fuse block for easier component selection. Look for color rectangles on the packaging of each fuse holder and fuse block, and match the color with the fuse packaging to find the correct fuse type. Some fuse blocks require two different fuse types.



CIRCUIT Wizard

Determine Your Circuit Requirements

Use the Blue Sea Systems Circuit Wizard to select the correct wire size, circuit breaker, or fuse and fuse holder. www.circuitwizard.bluesea.com



GMA® and AGA® Fuses

Fast-acting glass fuses

- · Visible indication of blown condition
- Used for 12V/24V DC applications

Blow Time Delay See bluesea.com





PN	Fuse Type	Amps	DC Volts	AC Volts	Retail Pack
5280	GMA	1A	24V DC	250V AC	3
5281	GMA	2A	24V DC	250V AC	3
5282	GMA	3A	24V DC	250V AC	3
5283	GMA	5A	24V DC	125V AC	3
5284	GMA	7A	24V DC	125V AC	3
5285	GMA	10A	24V DC	125V AC	3
5275	AGA	20A	32V DC		5

Protect your boat with the correct size wire and fuse, see p. 157

AGC® and MDL® Fuses

AGC - Fast-acting glass fuses MDL - Slow blow glass fuses

• Visible indication of blown condition

Voltage Max. Operating 32V DC / See table for AC See bluesea.com Blow Time Delay



AGC Fuses

			Retail
PN	Amps	Volts	Pack
5201	.25A	250V AC	5
5202	.5A	250V AC	5
5204	1A	250V AC	5
5204100	1A	250V AC	25
5205	1.5A	250V AC	5
5206	2A	250V AC	5
5206100	2A	250V AC	25
5207	2.5A	250V AC	5
5208	3A	250V AC	5
5208100	3A	250V AC	25
5209	4A	250V AC	5
5210	5A	250V AC	5
5210100	5A	250V AC	25
5211	6A	250V AC	5
5212	7A	250V AC	5
5213	7.5A	250V AC	5
5213100	7.5A	250V AC	25
5215	10A	250V AC	5
5215100	10A	250V AC	25
5217	15A		5
5217100	15A		25
5218	20A		5
5218100	20A		25
5219	25A		5
5219100	25A		25
5220	30A		5
5220100	30A		25
5288	1A, 3A, 5A, 10A,15A		5
5289	4 each 1A, 2A, 3A, 5A, 7.5A, 10A.15A. 20A.		40

Protect your boat with the correct size wire and fuse, see p. 157

MDL Fuses

PN	Amps	Volts	Retail Pack
5226	3A	250V AC	2
5227	5A	250V AC	2
5228	6.25A	250V AC	2
5229	7.5A	250V AC	2
5230	10A		2
5231	15A		2
5232	20A		2
5233	25A		2
5234	30A		2



5289 Includes a Heavy Duty In-Line Fuse Holder 5063 p. 56







Fuse Blocks

53

ATM® Fuses

Mini blade-type fuse

- · Color-coded for easy identification
- · Visible indication of blown condition
- Tin-plated connector blades for corrosion resistance

Interrupting Capacity 1,000A Voltage Max. Operating 32V DC

Blow Time Delay See bluesea.com

PN	Amne	Retail Pack
PIN	Amps	Ketali Pack
5261	2A	2
5262	3A	2
5263	4A	2
5270	5A	2
5264	7.5A	2
5271	10A	2
5272	15A	2
5273	20A	2
5265	25A	2
5274	30A	2
5286	5A, 10A, 15A, 20A, 30A	5

Protect your boat with the correct size wire and fuse, see p. 157

ATO® or ATC® Fuses

Fast-acting blade fuse

- · Color-coded for easy identification
- · Visible indication of blown condition
- Tin-plated connector blades for corrosion resistance

Interrupting Capacity 1,000A Voltage Max. Operating 32V DC

Blow Time Delay See bluesea.com

PN	Amps	Retail Pack
5235	1A	2
5236	2A	2
5237	3A	2
5238	4A	2
5239	5A	2
5240	7.5A	2
5241	10A	2
5242	15A	2
5243	20A	2
5244	25A	2
5245	30A	2
5246	40A	2
5287	5A, 10A, 15A, 20A, 25A, 30A	6

PN	Amps	Retail Pack
5235100	1A	25
5236100	2A	25
5237100	3A	25
5239100	5A	25
5240100	7.5A	25
5241100	10A	25
5242100	15A	25
5243100	20A	25
5244100	25A	25
5245100	30A	25

Protect your boat with the correct size wire and fuse, see p. 157

easyID™ ATC® Fuses


Fast-acting easyID™ illuminated blade fuses use Light Emitting Diode (LED) technology to show when a fuse has blown.

- Color-coded for easy identification
- · Visible indication of blown condition
- Tin-plated connector blades for corrosion resistance

Interrupting Capacity 1,000A Voltage Max. Operating 32V DC

Blow Time Delay See bluesea.com

PN	Amps	Retail Pack
5291	3A	2
5292	5A	2
5293	7.5A	2
5294	10A	2
5295	15A	2
5296	20A	2
5297	25A	2
5298	30A	2
5299	40A	2
5290	3x 3A, 3x 5A, 3x 7.5A, 3x 10A, 6x 15A, 3x 20A, 3x 25A, 3x 30A, 3x 40A	30







5290

MAXI® Fuses

Provides economical branch circuit protection

- · Color-coded for easy identification
- Silver-plated connector blades for corrosion resistance
- Visible indication of blown condition

Interrupting Capacity 1,000A

Voltage Max. Operating
Blow Time Delay See bluesea.com

PN	Amps	Retail Pack
5138	30A	1
5139	40A	1
5140	50A	1
5141	60A	1
5142	70A	1
5143	80A	1

Protect your boat with the correct size wire and fuse, see p. 157



MAXI In-Line Fuse Holder p. 56



MAXI Fuse Block p. 57



Fuse Holders p. 56



ST-Blade Fuse Blocks p. 58-63



SafetyHub Fuse Blocks p. 67



WeatherDeck Waterproof Fuse Panels p. 111




ST-Blade Water-Resistant Fuse Block p. 58

PROTECTED

AMI® or MIDI® Fuses

Compact fuse for main or branch 30A to 200A circuit protection

- · Color-coded for easy identification
- Visible indication of blown condition
- · Tin-plated connector blades for corrosion resistance



32V DC Voltage Max. Operating



Regulatory

Meets SAE J1171 external ignition protection requirements when used with Blue Sea Systems' Fuse Blocks

IP66 - protected against powerful water jets (see inside back cover)

PN	Amps	Color	Retail Pack
5250	30A	Orange	2
5251	40A	Green	2
5252	50A	Red	2
5253	60A	Yellow	2
5254	70A	Brown	2
5255	80A	White	2
5256	100A	Blue	2
5257	125A	Pink	2
5258	150A	Lt Blue	2
5259	175A	Tan	2
5260	200A	Purple	2





Safety Fuse Block 7720



SafetyHub Fuse Blocks p. 67

MEGA® or AMG® Fuses

Economical fuse for 100A to 300A circuit protection



2,000A @ 32V DC Interrupting Capacity Voltage Max. Operating 32V DC

Trip Time Delay See bluesea.com

Regulatory

Meets SAE J1171 external ignition protection requirements When used with Blue Sea Systems' Safety Fuse Block 7721 (p. 66) IP66 – protected against powerful water jets (see inside back cover)



PN	Amps	Retail Pack
5101	100A	1
5102	125A	1
5103	150A	1
5104	175A	1
5105	200A	1
5107	250A	1
5108	300A	1

Protect your boat with the correct size wire and fuse, see p. 157

MRBF Fuses

MRBF—Marine Rated Battery Fuse

Space-saving ignition protected fuse for 30 to 300 Amp loads. Must use with MRBF Fuse Blocks (p. 64)

- · Color-coded for easy identification
- · Visible indication of blown condition

Interrupting Capacity 10,000A @ 14V DC 5,000A @ 32V DC

2,000A @ 58V DC

58V DC Voltage Max. Operating Fuse Hole Opening Trip Time Delay

M8 (5/16") See bluesea.com

Regulatory

Meets SAE J1171 external ignition protection requirements IP66 – protected against powerful water jets (see inside back cover)

ABYC E-11.10.1.1.1. Overcurrent Protection Device Location - Ungrounded conductors shall be provided with overcurrent protection within a distance of seven inches (175mm) of the point at which the conductor is connected to the source of power measured along the conductor

PN	Amps	Color	Retail Pack
5175	30A	LT Green	1
5176	40A	LT Blue	1
5177	50A	Red	1
5178	60A	Gold	1
5180	75A	Brown	1
5181	80A	Lime	1
5182	90A	Purple	1
5183	100A	Yellow	1
5184	125A	Green	1
5185	150A	Orange	1
5186	175A	White	1
5187	200A	Blue	1
5189	250A	Pink	1
5190	300A	Gray	1

Protect your boat with the correct size wire and fuse, see p. 157

Related Products







Safety Fuse Block 7721





MRRF Fuse Blocks

Class-T Fuses

High interrupt capacity for large battery banks including Lithium-Ion and TPPL batteries

20,000A @ 125V DC

See bluesea.com

125V DC



inverter manufacturers

Interrupting Capacity Voltage Max. Operating Trip Time Delay

Regulatory

UL listed to standard 248-15

PN	Amps	Retail Pack
5112	110A	1
5113	125A	1
5114	150A	1
5115	175A	1
5116	200A	1
5117	225A	1
5118	250A	1
5119	300A	1
5120	350A	1
5121	400A	1

Protect your boat with the correct size wire and fuse, see p. 157

Related Products



Class-T Fuse Blocks p. 65

ANL Fuses

For 35A to 750A circuit protection



· Visible indication of blown condition

Interrupting Capacity 6,000A @ 32V DC

Voltage Max. Operating 32V DC

Trip Time Delay See bluesea.com

Regulatory

35-500A ONLY – Meets SAE J1171 external ignition protection requirements

- [IGI	NIT	ГΙС	N
	PR(OTE	СТ	ED

PN	Amps	Retail Pack
5164	35A	1
5165	40A	1
5122	50A	1
5123	60A	1
5124	80A	1
5125	100A	1
5126	130A	1
5127	150A	1
5128	175A	1

Protect your boat with the corre	ct
size wire and fuse, see p. 157	

PN	Amps	Retail Pack	
5129	200A	1	
5131	250A	1	
5133	300A	1	
5135	350A	1	
5136	400A	1	
5137	500A	1	
Not Ignition Protected			
5161	600A	1	
5163	750A	1	




ANL Fuse Blocks p. 65



AGC® or MDL® In-Line Fuse Holders

Crimpable In-Line Fuse Holder

- Accepts 12-16 AWG wire
- · 30A Max. fuse amperage
- Fuse sold separately (p. 52)



Waterproof In-Line Fuse Holder

- · Accepts 12-18 AWG wire
- 30A Max. fuse amperage
- Fuse sold separately (p. 52)

PN	Description
5061	Waterproof In-Line Fuse Holder

Waterproof In-Line Fuse Holder

- Accepts 12-16 AWG wire
- · 20A Max. fuse amperage
- Fuse sold separately (p. 52)

PN	Description
5062	Waterproof In-Line Fuse Holder



ATO® or ATC® In-Line Fuse Holders

In-Line Fuse Holder

- · Supplied with 12 AWG pigtails
- 30A Max. fuse amperage
- Fuse sold separately (p. 53)



Waterproof In-Line Fuse Holder

- · Supplied with 12 AWG pigtails
- 30A Max. fuse amperage
- Fuse sold separately (p. 53)

N	Description
064	ATO or ATC In-Line Fuse Holder
065	ATO or ATC Waterproof In-Line Fuse Holder

Related Products





Heavy Duty In-Line Fuse Holder

- · Accepts 12-18 AWG wire
- 30A Max. fuse amperage
- Fuse sold separately (p. 52)

PN	Description
5063	Heavy Duty In-Line Fuse Holder



5022

MAXI® In-Line Fuse Holder

In-line fuse holder for MAXI Fuses



- Supplied with 5 inch #6 lead wires and two adhesive lined sealing shrink wrap tubes for sealed terminations
- Firewall mounting hole permits two or more holders to be mounted together
- · Protective cover with retaining strap
- Fuse sold separately (p. 53)

Voltage Max. Operating 32V DC 48A Amperage Max. Continuous Fuse Max. Amperage 60A

Mounting Hole 1/4", M6, or #12 Screws

PN	Description	
5068	MAXI In-Line Fuse Holder	

Water-Resistant Fuse Holder Panel Mount

- Rated IP66 on front protected against powerful water jets
- 20A Max. fuse amperage
- 0.50" (12.70 mm) mounting hole
- Fuse sold separately (p. 52)

5022 Replacement cap for 5021

PN	Description
5021	Water Resistant Panel Mount Fuse Holder
5022	Replacement Cap

5021

Related Products





AGC Fuses MDL Fuses p. 52



MAXI Fuses

57

MAXI® Fuse Block

Ignition protected fuse block allows for installation in a gasoline engine compartment



NOTE: 5006100 replaces 5006

- Snap-on terminal cover insulates all conductive parts, satisfying ABYC/USCG requirements
- Cover breakouts allow wires from sides or bottom
- Terminal screws compress fuse blades within blocks for low resistance connections
- Label recess accepts large format label (p. 152)
- Fuses sold separately (p. 53)

Voltage Max. Operating 32V DC
Amperage Max. Operating 80A
Wire Size 14–4 AWG
MAXI® Fuses available 30A–80A
Screw Terminal Torque 25 in-lb
Mounting #10 Screws

Regulatory


CE marked

Meets ISO 8846 and SAE J1171 external ignition protection requirements when cover is securely latched and all mounting screws are installed.



PN	Description
5006100	MAXI Fuse Block

For the full list of specifications see page 69



Related Products



ST-Glass Fuse Blocks

Innovative design allows for labeling, spare fuse storage, and easy fuse removal



5015

- · Can be used for 24-hour circuits
- · Screw terminals for securing wires
- · Integrated fuse ejector levers
- Clear insulating cover satisfies ABYC/USCG insulation requirements, accepts Large Format Labels (p. 152), and provides storage for spare fuses
- Tin-plated phosphor bronze fuse clips are encapsulated and cannot be sprung
- One-piece stainless flange nuts ensure safe and secure connections
- Fuses sold separately (p. 53)


Voltage Max. Operating 32V DC
Amperage Max. Operating 30A per circuit
Amperage Max. Operating 100A per block
Fuse Type AGC or MDL Fuses


Screw Terminal #8-32 with captive star lock washer

Mounting #8 Screw (M4)

PN	Circuits	Tin-plated copper negative bus
5015	6	#10-32 stud
5018	6	

For the full list of specifications see page 69







ST-Blade Water-Resistant Fuse Block NEW

Provides water-resistant circuit protection for ATO/ATC fuses & circuit breakers in a compact footprint. The single side nesting design allows for wire entry from one side to maximize space.

- · Water-resistant design with standard ring or fork type terminals allows for simple wiring with standard tools
- · Accepts a wide range of wire sizes
- Includes 3 wire plugs to maintain water resistant rating if less than 4 loads are required
- · Accepts ATO and ATC fast-acting blade fuses (p. 53)
- Accepts ATO/ATC-Style Low Profile Circuit Breakers (p. 73)
- · Nests with other ST-Blade Water-Resistant Fuse Blocks and Water-Resistant 100A Bus Bars to reduce wire
- · Insulating cover meets ABYC/USCG insulation requirements
- Tin-plated copper busses and fuse clips
- · Includes four write-on circuit labels
- · Small format standard and custom labels available
- Spare fuse and fastener storage in cover
- Fuses (p. 53) and circuit breakers (p. 73) sold separately

Voltage Max. Operating

Amperage Max. Operating 80A per block / 25A per circuit Fuse Type ATO or ATC Fuses, or circuit breakers

Input Wire Size (1) 8 AWG to 4 AWG (5) 16 AWG to 10 AWG Load Wire Size Tin-Plated Copper C11000 **Bus Material** Mounting Thru-hole Clearance for 1/4" (6mm) screws

Screw Terminal #8-32 Screws with captive star lock washer


Regulatory

IP66 - protected against powerful water jets (see inside back cover)


PN	Description
5056	ST-Blade Water-Resistant Fuse Block

For the full list of specifications see page 69



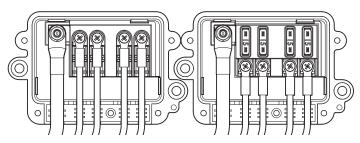

Nested Water-Resistant Fuse Block 5056 and Water-Resistant BusBar 2356

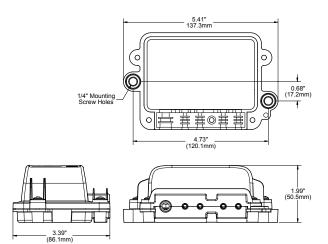

TECH tip

Water-Resistant ST-Blade Fuse Block

The Blue Sea Systems' new Water-Resistant ST-Blade Fuse Block is rated IP66 and can withstand water from heavy seas or projected in powerful jets, allowing for flexible installations anywhere on boats and vehicles. It is rated up to 80A continuous for the entire fuse block or up to 25A continuous per circuit. It can be used as a standalone fuse block, or nested with Blue Sea Systems' new Water-Resistant BusBar (page 96) which provides consolidated wire management when mounted side by side (reference nesting image). The taller cover on the fuse block accommodates installation of ATO/ATC fuses as well as Blue Sea Systems' new line of push-to-reset ATO/ATC-style circuit breakers, which gives the benefit of having resettable circuit protection in a compact footprint.



Water-Resistant BusBar



easyID ATC Fuses ATO or ATC Fuses p. 53





Circuit Breakers

59

ST-Blade Battery Terminal Mount Fuse Block



Easily add 4 fused circuits to the terminal of a battery. Provides power to new accessories in your boat or vehicle.

- · Mounts on the battery terminal stud
- Screw terminals for securing wires
- Nylon insulated ring terminals included for each screw terminal
- Insulating cover meets ABYC/USCG insulation requirements
- Ignition protected for use in a gasoline engine compartment
- Includes four 16-14 AWG and four 12-10 AWG Nylon insulated ring terminals
- Includes four write-on circuit labels
- Small format standard and custom labels available
- Fuses sold separately (p. 53)

Voltage Max. Operating 32V DC

Amperage Max. Operating 100A per block / 30A per circuit

Fuse Type ATO or ATC Fuses
Bus Material Tin-Plated Copper C11000

Mounting Thru-hole Clearance for 3/8" [M10] stud

Screw Terminal #8-32 Screws with captive star lock washer


Regulatory


Meets ISO 8846 and SAE J1171 external ignition protection requirements

IGNITION PROTECTED

PN	Description
5023	ST-Blade Battery Terminal Mount Fuse Block
5024	ST-Blade Battery Terminal Mount Fuse Block Kit

For the full list of specifications see page 69

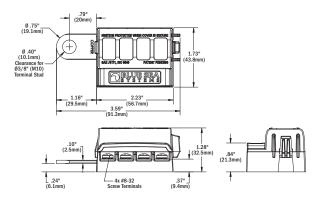



Related Products







easyID ATC Fuses



2340 BusBars p. 101








Nylon insulated ring terminals




5024

• Includes a 4-circuit negative busbar see page 96



5023 Installed

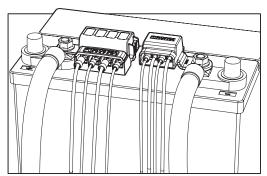

5024 Installed

ST-Blade Fuse Blocks

Independent Source

Consolidates branch circuits and eliminates in-line fuses

- Independent source fuse block
- Can be used for 24-hour circuits and switched circuit in same block
- Screw terminals for securing wires accept ring terminals
- · Clear insulating cover with label recesses and storage for one fuse, satisfies ABYC/USCG insulation requirements
- Easy to open, push button latch for easy access to fuses
- · Tin-plated copper buses and fuse clips
- Fuse Block with cover includes 20 write-on circuit labels and two Terminal Block Jumpers PN 9217
- Small format standard and custom labels available
- Fuses sold separately (p. 53)

Voltage Max. Operating Amperage Max. Operating 30A per circuit

40A per jumped circuit group Amperage Max. Operating


ATO or ATC Fuses Fuse Type


Screw Terminal #8-32 Screws with captive star lock washer

#8 Screw (M4) Mounting

PN	Circuits	Cover
5035	6	Yes
5037	6	-

For the full list of specifications see page 69

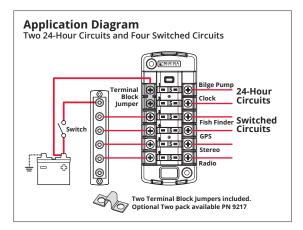



Related Products





easyID ATC Fuses Terminal Block Jumpers



5035



5037

TECH tip.

Fuse Sizing Best Practices - 80% Rule

It is a common misconception that a fuse should be rated for the same amperage as the circuit. Fuses include a metal component designed to heat up when current runs through them. The more current the hotter the metal gets. When too much current runs through the fuse, the metal heats up enough to separate, breaking the circuit. This means that rating a fuse at the same amperage as the circuit will produce the maximum heat in the fuse without actually breaking the circuit. For this reason the National Electrical Code recommends limiting the amount of current in a circuit to 80% of the fuse rating in that circuit. In other words a 40A fuse would be appropriate for a circuit with a maximum of 32A continuous. This is why you will see many fuse blocks with maximum continuous amperage ratings around 80% of the largest available fuse.

61

ST-Blade Split Bus Fuse Block

Common and/or Independent Source

Two isolated 6-circuit fuse blocks with a negative bus. For use when a mix of switched and 24-hour circuits are desired in the same block

- · Common and/or independent source fuse block
- Provides two isolated groups of six ATO/ATC circuits
- For use with either two isolated batteries or with a single battery providing a mix of 24-hour and switched circuits
- Clear insulating cover satisfies ABYC/USCG insulation requirements and provides storage for two spare fuses
- Accepts ring terminals
- Easy to open, push button latch provides easy access to fuses
- · Tin-plated copper buses and fuse clips
- Includes 20 write-on circuit labels
- Fuses sold separately (p. 53)

Voltage Max. Operating 32V DC
Amperage Max. Operating 30A per circuit

100A total (not to exceed 80A per load group)

Fuse Type ATO or ATC Fuses

Screw Terminal #8-32 Screws with captive star lock washer

Mounting #8 Screw (M4)

Recommended Wire Size Positive Feed: 4-6 AWG (25-16 mm²)

Branck Circuits: 10-16 AWG (6-15 mm²)

Recommended Torque #10 Stud: 24 in-lb (2.71 N-m)

#8 Screw: 18 in-lb (2.03 N-m)


PN	Circuits	Cover	Negative Bus	Positive Bus
5032	12	Yes	#10-32 stud	#10-32 stud


For the full list of specifications see page 69







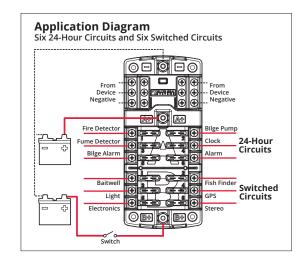

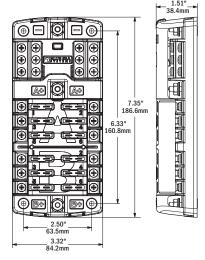





ST-Blade Common Source Fuse Blocks

Common Source

Consolidates branch circuits and in-line fuses

- · Common source fuse block
- Screw terminals for securing wires accept ring terminals
- One-piece stainless flange nuts ensure safe and secure connections
- Clear insulating cover with label recesses and storage for two fuses, satisfies ABYC/USCG insulation requirements
- Easy to open, push button latch for easy access to fuses
- Tin-plated copper buses and fuse clips
- Fuse blocks with covers include 20 write-on circuit labels small format standard and custom labels available
- Fuses sold separately (p. 53)


Voltage Max. Operating 32V DC
Amperage Max. Operating 30A per circuit
Amperage Max. Operating 100A per block
Fuse Type ATO or ATC Fuses


Screw Terminal #8-32 Screws with captive star lock washer

Mounting #8 Screw (M4)

PN	Circuits	Cover	Negative Bus	Positive Bus	[A] Width in (mm)	[B] Mounting Centers in (mm)	[C] Height in (mm)	[D] Mounting Centers in (mm)
5025	6	Yes	#10-32 stud	#10-32 stud	3.32 (84.20)	2.50 (63.50)	4.89 (124.31)	3.88 (95.58)
5028	6	Yes		#10-32 stud	3.32 (84.20)	2.50 (63.50)	3.65 (92.76)	2.64 (67.03)
5030	6		#10-32 stud	#10-32 stud	3.32 (84.20)	2.50 (63.50)	4.89 (124.31)	3.88 (95.58)
5033	6			#10-32 stud	3.32 (84.20)	2.50 (63.50)	3.65 (92.76)	2.64 (67.03)
5026	12	Yes	#10-32 stud	#10-32 stud	3.32 (84.20)	2.50 (63.50)	6.47 (164.39)	5.46 (138.66)
5029	12	Yes		#10-32 stud	3.32 (84.20)	2.50 (63.50)	5.23 (132.84)	4.22 (107.11)
5031	12		#10-32 stud	#10-32 stud	3.32 (84.20)	2.50 (63.50)	6.47 (164.39)	5.46 (138.66)
5034	12			#10-32 stud	3.32 (84.20)	2.50 (63.50)	5.23 (132.84)	4.22 (107.11)

For the full list of specifications see page 69



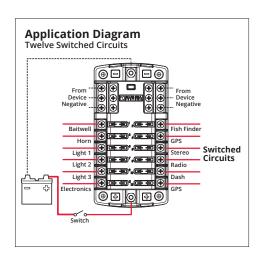



5028 with cover 5033 without cover



5025 with cover 5030 without cover



5029 with cover 5034 without cover



5026 with cover 5031 without cover

Related Products





p. 53



WeatherDeck Switch Only

63

ST-Blade Compact Fuse Blocks

Common Source

Provides surface mount circuit protection for ATO or ATC Fuses in a compact footprint. The single side design allows wire entry from one side to maximize space.

- Compact common source fuse block
- Accepts ATO and ATC fast acting blade fuses
- · Single side entry wiring
- Ignition Protected for use in a gasoline engine compartment
- Insulating cover meets ABYC/USCG insulation requirements
- Tin-plated copper buses and fuse clips
- Accepts ring or snap fork type terminals
- Includes write-on circuit labels for each circuit
- Small format standard and custom labels available
- Fuses sold separately (p. 53)

Voltage Max. Operating
Amperage Max. Operating
Amperage Max. Operating
Fuse Type
Screw Terminal

32V DC
30A per circuit
100A per block
ATO or ATC Fuses
48-32 Screws with captive

star lock washer

#0 Carous (MA)

Mounting #8 Screw (M4)


Regulatory


Meets ISO 8846 and SAE J1171 external ignition protection requirements

PN	Circuits	Cover
5045	4	Yes
5046	8	Vec



For the full list of specifications see page 69

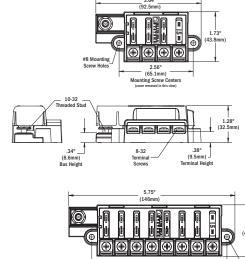

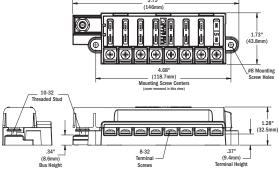

Related Products








5045



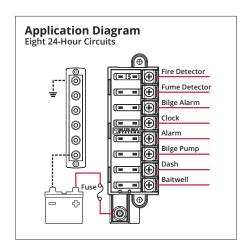

MRBF Surface Mount Fuse Blocks

MRBF—Marine Rated Battery Fuse

- Surface mount fuse blocks accommodate three MRBF fuses for consolidated high amperage circuit protection
- The independent source fuse block (5194) is ideal for 3 output battery chargers
- The common source fuse block (5196) provides 3 loads from a single source
- Clip-on cover insulates terminal connections
- Versatile wiring options allow all wires to come out a single side
- Label recesses for easy circuit identification
- One-piece stainless flange nuts ensure safe and secure connections
- Ignition protected when used with MRBF fuses
- Fuses sold separately (p. 54)

	5194	5196
Voltage Max. Operating	58V DC	58V DC
Amps Max. Operating	300 per block	300 per block
(using 4/0 cables)		240A per circuit
Terminal Fuses Available	30A-300A	30A-300A
Terminal Stud Size	5/16" -18 (8mm)	5/16" -18 (8mm)
Mounting Hole Size	#10 (5mm)	#10 (5mm)

Regulatory

Meets ISO 8846 and SAE J1171 external ignition protection requirements when used with MRBF fuses and cover is securely latched

IGNITION PROTECTED

PN	Description	Fuses
5194	Independent Source	3
5196	Common Source	3

For the full list of specifications see page 69





Related Products



MRBF Fuses

MRBF Terminal Fuse Blocks

MRBF—Marine Rated Battery Fuse

Satisfies ABYC 7" circuit protection rule by mounting on a 3/8" battery post, battery switch, or bus bar

- Appropriate for DC Main, inverter, windlass, and bow thruster circuit protection
- Weatherproof suitable for small open-cockpit boats and other harsh environments
- Insulating cap prevents accidental shorts
- Ignition protected when used with MRBF fuses
- Fuses sold separately (p. 54)

Voltage Max. Operating 58V DC
Amperage Max. Operating 300A
Terminal Fuses Available 30–300 Amps

Regulatory

Meets SAE J1171 external ignition protection requirements

IGNITION PROTECTED

PN	Terminal Stud Size	Mounting	Fuses
5191	M8 (5/16"-18)	3/8"	1
2151	M8 (5/16"-18)	3/8"	2

For the full list of specifications see page 69



Related Products



MRBF Fuses p. 54

MEGA® or AMG® Fuse Block

Provides an economical system for 100 to 300 Amp fusing

- Insulating cover with breakouts satisfies ABYC/USCG insulation requirements
- Stainless steel studs provide resistance to corrosion and allow high torque
- · UL 94-V0 base resists high heat
- Fuses sold separately (p. 54)

Voltage Max. Operating 32V DC Amperage Max. Operating 300A

Wire Size to Meet Rating 4/0 AWG (120mm²)
Fuses available 100–300 Amps



PN	Terminal Stud Size	Mounting
5001	5/16"-18 (M8)	#10 (M5) Screws

For the full list of specifications see page 69

Related Products




65

Class-T Fuse Blocks

Allows the use of Class T fuses for fast acting circuit protection of inverters and other electronics







- Four stud design provides ample access around connecting stud to install large cable lugs without obstruction from the fuse
- Insulating cover satisfies ABYC/USCG insulation requirements
- · Cover breakouts allow wire access in any direction
- · Stud design ensures secure fuse mounting even with high heat
- Stainless steel studs provide resistance to corrosion and high torque
- One-piece stainless flange nuts ensure safe and secure connections
- UL 94-V0 base resists high heat
- Fuse sold separately (p. 55)

Voltage Max. Operating 160V DC
Mounting 1/4" (M6) Screws
Fuse Mounting Blocks Tin-Plated Copper

Regulatory

5007100 & 5502100 Meets ISO 8846 and SAE J1171 external ignition protection requirements when cover is secure

IGNITION PROTECTED

PN	Class T Fuses	Terminal Stud Size	Amps Max. Operating
5502	225A-400A	3/8"-16 (M10)	320A
5007100	110A-200A	1/4"-20 (M6)	160A
5502100	225A-400A	5/16"-18 (M8)	320A

For the full list of specifications see page 69

Related Products



Class-T Fuse:

ANL® Fuse Blocks

Accepts a wide range of ANL fuse amperages for versatile fusing



- Swing out design allows replacement of the fuse without removing fasteners
- Insulating cover satisfies ABYC/USCG insulation requirements
- Cover breakouts allow wire access in any direction
- · Insert molded studs ensure secure fuse mounting
- Stainless steel studs provide resistance to corrosion and high torque
- One-piece stainless flange nuts ensure safe and secure connections
- UL 94-V0 base resists high heat
- Fuse sold separately (p. 55)

	5503	5005
Voltage Max. Operating	32V DC	32V DC
Terminal Stud Size	5/16"-18 (M8)	5/16"-18 (M8)
Cable Size	Up to 4/0 AWG	Up to 2/0 AWG
Fuse Mounting Blocks	Tin-Plated Copper	Tin-Plated Copper
ANL Fuses Available	35-750 Amps	35-300 Amps

PN	Terminal Stud Size	Amps Max. Operating	Mounting
5005	5/16"-18 (M8)	300A	#10 (M5) Screws
5503	5/16"-18 (M8)	750A	1/4" (M6) Screws

For the full list of specifications see page 69

Related Products



ANL Fuses p. 55



ABYC guidelines and Ignition Protection

Blue Sea Systems fuse blocks marked ignition protected are designed and tested for ignition protection, enabling them to be installed in a compartment where gasoline or other explosive fumes may be present.

Blue Sea Systems' fuse blocks that meet the U.S. Coast Guard ignition protection requirements include the MAXI®, ST-Blade Battery Terminal Mount, ST-Blade Compact, Terminal MRBF, Class-T, Safety, and SafetyHub Fuse Blocks.

The U.S. Coast Guard states:

An electrical component that is "ignition protected" is capable of operating in an explosive environment without igniting that environment. "Ignition protection" of electrical devices is accomplished by the use of seals, flame arrestors and potting (sealing), or a combination of such means.

Safety Fuse Block AMI® or MIDI®

Ignition protected for use on gasoline powered boats with 30A to 200A circuits



- Sealed cover protects fuses from the harsh marine environment and satisfies ABYC/USCG insulation requirements
- Cover breakouts allow wire access in three directions
- · Cover accommodates a spare fuse
- One-piece stainless flange nuts ensure safe and secure connections
- · Accepts square format standard or custom label
- Fuses sold separately (p.54)

Voltage Max. Operating 32V DC

Wire Size to Meet Rating 2/0 AWG (70 mm²)

Mounting holes 2/0 ACCEPT 1/4" (M6) Screws

Terminal Stud Size M8

Terminal Screw Size (7720) M5 Stainless Steel

Regulatory

CE marked

Meets ISO 8846 and SAE J1171 external ignition protection requirements when cover is secure

IP66 – protected against powerful water jets (see inside back cover)

PN	Fuse Type	Fuse Amperages Available
7720	AMI or MIDI	30-200A



Related Products





ABYC guidelines and Ignition Protection

Blue Sea Systems fuse blocks marked ignition protected

are designed and tested for ignition protection, enabling them to be installed in a compartment where gasoline or other explosive fumes may be present.

Blue Sea Systems' fuse blocks that meet the U.S. Coast Guard ignition protection requirements include the MAXI®, ST-Blade Battery Terminal Mount, ST-Blade Compact, Terminal MRBF, Class-T, Safety, and SafetyHub Fuse Blocks.

The U.S. Coast Guard states:

An electrical component that is "ignition protected" is capable of operating in an explosive environment without igniting that environment. "Ignition protection" of electrical devices is accomplished by the use of seals, flame arrestors and potting (sealing), or a combination of such means.

Safety Fuse Block MEGA® or AMG®

Ignition protected for use on gasoline powered boats with 30A to 300A circuits



- Sealed cover protects fuses from the harsh marine environment and satisfies ABYC/USCG insulation requirements
- Cover breakouts allow wire access in three directions
- One-piece stainless flange nuts ensure safe and secure connections
- · Accepts square format standard or custom label
- Fuses sold separately (p.54)

Voltage Max. Operating 32V DC

Wire Size to Meet Rating 2/0 AWG (70 mm²)

Mounting holes 2/0 ACCEPT 1/4" (M6) Screws

Terminal Stud Size M8

Regulatory


CE marked


Meets ISO 8846 and SAE J1171 external ignition protection requirements when cover is secure

IP66 – protected against powerful water jets (see inside back cover)

PN	Fuse Type	Fuse Amperages Available
7721	MEGA or AMG	100-300A



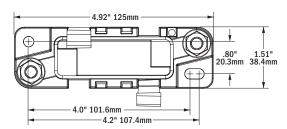





MEGA or AMG Fuses p. 54

67

SafetyHub 100 Fuse Block

The SafetyHub 100 combines an ignition protected fuse block and integrated connecting plugs. It is safe for use on gasoline powered boats, reduces wiring connections, and consolidates up to seven fused circuits.



- Accepts three AMI or MIDI Fuses for high-amp circuits including panel feeds, windlasses, and stereo amplifiers
- Accepts four ATO or ATC Fuses for circuits including bilge pumps, electronics and lights
- Sealed cover protects fuses from the harsh marine environment and satisfies ABYC/USCG insulation requirements
- Integrated connector plug eliminates loose wires and provides a secure, waterproof connection
- Fuses sold separately (p. 53-54)

Amperage Max. Operating (combined) 280A
Voltage Nominal Operating 12V DC
Minimum Cable Size to Meet Ratings 4/0 AWG (120 mm²)
Recommended Ring Terminal M8 (5/16")

MIDI or AMI Fuse Block

Amperage Max. Operating (per block)

Amperage Max. Operating (per circuit)

Fuse Amperages Available

Minimum Cable Size to Meet Ratings

2/0 AWG (70 mm)

ATO or ATC Fuse Block

Amperage Max. Operating (per block) 50A†
Amperage Max. Operating (per circuit) 20A†
Fuse Amperages Available 1A–20A

Regulatory

CE marked

Meets ISO 8846 and SAE J1171 external ignition protection requirements when cover is secure

IP66 – protected against powerful water jets (see inside back cover)

 † Ratings are dependent on input cable sized for appropriate amperages

PN	Description
7725	SafetyHub 100 Fuse Block



Related Products







easyID ATC Fuses p. 53



AMI or MIDI Fuses p. 54

SafetyHub 150 Fuse Block

The SafetyHub 150 is an ignition protected fuse block with screw termination. It is safe for use on gasoline powered boats, reduces wiring connections, and consolidates up to ten fused circuits.



- Accepts four AMI or MIDI Fuses for high-amp circuits including panel feeds, windlasses, and stereo amplifiers
- Accepts six ATO or ATC Fuses for circuits including bilge pumps, electronics and lights
- Sealed cover protects fuses from the harsh marine environment and satisfies ABYC/USCG insulation requirements
- Negative bus provides common location for negative connection
- · Circuit identification label with write-on capability
- Fuse puller to remove ATO or ATC Fuses
- Cover provides storage space for spare fuses and mounting screws
- One-piece stainless flange nuts ensure safe and secure connections
- Fuses sold separately (p. 53-54)

Amperage Max. Operating (combined) 280A Voltage Max. Operating 32V DC

Minimum Cable Size to Meet Ratings 4/0 AWG (120 mm²)

Recommended Ring Terminal M8 (5/16") Stud Size M8

MIDI or AMI Fuse Block

Amperage Max. Operating (per block) 280A†
Amperage Max. Operating (per circuit) 170A†
Fuse Amperages Available 30A–200A

Minimum Cable Size to Meet Ratings 2/0 AWG (70 mm²)

Screw Size M5

ATO or ATC Fuse Block

Amperage Max. Operating (per block) 50A[†]
Amperage Max. Operating (per circuit) 25A[†]
Fuse Amperages Available 1A–30A
Screw Size #8-32

Regulatory

CE marked

Meets ISO 8846 and SAE J1171 external ignition protection requirements when cover is secure

. IP66 – protected against powerful water jets (see inside back cover)

† Ratings are dependent on input cable sized for appropriate amperages

PN	Description
7748	SafetyHub 150 Fuse Block



Fuse Specification Table

Product	GMA	AGA	AGC	MDL	АТМ	ATO or ATC	easyID	MAXI
	AC/DC		AC/DC	AC/DC				
Page Number	52	52	52	52	53	53	53	53
Interrupting Capacity DC	-	-	-	-	1,000A DC	1,000A DC	1,000A DC	1,000A DC
Maximum Voltage DC	24V DC	32V DC	32V DC	32V DC	32V DC	32V DC	32V DC	32V DC
Maximum Voltage AC	5–10A: 125V AC 1–3A: 250V AC	-	.25-10A: 250V AC	3-7.5A: 250V AC				
Amperage Range	1-10A	20A	.25-30A	3-30A	2-30A	1-30A	3-40A	30-80A
Quantity Per Package	3	5	5 or 25	2	2	2 or 25	2	1
Regulatory								

 $[\]hbox{$\star$ Certain amperages of GMA0, AGC0, and MDL0 fuses are AC/DC rated. See product page for specific ratings}$

Product	MRBF	AMI or MIDI	MEGA or AMG	Class-T	ANL				
Page Number	54	54	54	55	55				
Interrupting Capacity	10,000A @ 14V DC 5,000A @ 32V DC 2,000A @ 58V DC	5,000A @ 16V DC 2,000A @ 32V DC	2,000A @ 32V DC	20,000A @ 125V DC	6,000A @ 32V DC				
Maximum Voltage	58V DC	32V DC	32V DC	125V DC	32V DC				
Amperage Range	30-300A	30-200A	30-200A	30-200A	30-200A	30-200A	100-300A	110-400A	35-750A
Quantity Per Package	1	2	1	1	1				
Regulatory	SAE J1171 IP66 – protected against powerful water jets.	ISO 8846 and SAE J1171 when used with Blue Sea Systems' SafetyHubs and Safety Fuse Block PN 7720.	ISO 8846 and SAE J1171 when used with Blue Sea Systems' Safety Fuse Block PN 7721.		35–500A Meets ISO 8846 and SAE J1171.				

In-Line Fuse Holder Specification Table

Product	Crimpable	Waterproof		Heavy Duty Water ATO or ATC		ATO or ATC	Waterproof ATO or ATC	MAXI
		12			CO.			
Page Number/ PN	5060	5061	5062	5063	5021	5064	5065	5068
Page Number	56	56	56	56	56	56	56	56
For use with	AGC or MDL	AGC or MDL	AGC or MDL	AGC or MDL	AGC or MDL	ATO or ATC	ATO or ATC	MAXI
Wire Size	12-16 AWG	12-18 AWG	12-16 AWG	12 AWG Pigtails	-	12 AWG Pigtails	12 AWG Pigtails	#6 Red Lead Wire
Maximum Amperage	30A per circuit	30A per circuit	20A per circuit	30A per circuit	20A per circuit	30A per circuit	30A per circuit	60A per circuit
Regulatory					IP66 on front – protected against powerful water jets.			

Fuse Block Specification Table

bluesea.com

Product	MAXI	ST-Glass			ST-Blad	le		
PN	5006100	5015 & 5018	NEW	5023	5035 & 5037	5032	5028, 5025, 5029 & 5026	5045 & 5046
Page Number	57	57	58	59	60	61	62	62
For use with	MAXI	AGC or MDL	ATO or ATC	ATO or ATC	ATO or ATC	ATO or ATC	ATO or ATC	ATO or ATC
Maximum Voltage	32V DC	32V DC	32V DC	32V DC	32V DC	32V DC	32V DC	32V DC
Maximum Amperage per circuit	80A	30A	25A	30A	30A	30A	30A	30A
Maximum Amperage per block	80A	100A	80A	100A	40A per jumped circuit group	100A (not to exceed 80A per load group)	100A	100A
Available Fuses	30-80A	.25-30A	1-30A	1-30A	1-30A	1-30A	30-300A	1-30A
Ingress Protected			IP66-protected against powerful water jets.					IP66-protected against powerful water jets.
Ignition Protected	ISO 8846, SAE J1171 when cover is secure.			ISO 8846, SAE J1171 when cover is secure.				ISO 8846, SAE J1171 when cover is secure.

Product	MRBF Terminal	MRBF Surface	MRBF Surface	MEGA or AMG	Class-T	Class-T	Class-T
				A	Asque	Admin	AAGIAL
PN	2151 & 5191	5194	5196	5001	5502	5007100	5502100
Page Number	64	64	64	65	65	65	65
For use with	Terminal (MRBF)	Terminal (MRBF)	Terminal (MRBF)	MEGA or AMG	Class-T	Class-T	Class T
Maximum Voltage	58V DC	58V	DC	32V DC	160V DC	160V DC	160V DC
Maximum Amperage per circuit	300A	240A	240A	300A	320A	160A	320A
Maximum Amperage per block	300A		300A	300A	320A	160A	320A
Available Fuses	30-300A	30-300A	30-300A	100-300A	225-400A	110-200A	225-400A
Ingress Protected	IP66 when used with Blue Sea Systems' Terminal (MRBF) Fuses.	-	-				
Ignition Protected	with B	SAE J1171 when used lue Sea Systems' MRBF	fuses.			ISO 8846, SAE J1171 when cover is secure.	ISO 8846, SAE J1171 when cover is secure.

Product	ANL	ANL	Safety	SafetyHub 100	SafetyHub 150
PN	5005	5503	7720 & 7721	7725	7748
Page Number	65	65	66		67
For use with	ANL	ANL	7720: AMI or MIDI 7721: MEGA or AMG	AMI or MIDI a	and ATO or ATC
Maximum Voltage	32V DC	32V DC	32V DC	12V DC	32V DC
Maximum Amperage per circuit	300A	750A	7720: 200A 7721: 300A	AMI or MIDI: 250A ATO or ATC: 30A	AMI or MIDI: 170A ATO or ATC: 25A
Maximum Amperage per block	300A	750A	7720: 200A 7721: 300A	ATO or ATC: 50A	AMI or MIDI: 280A ATO or ATC: 50A
Maximum Total Amperage (combined)	35-300A			280A	280A
Available Fuses		35-750A	7720: 30-200A 7721: 100-300A	AMI or MIDI: 30-200A ATO or ATC: 1-30A	AMI or MIDI: 30-200A ATO or ATC: 1-30A
Ingress Protected			IP	66-protected against powerful wa	ter jets.
Ignition Protected			IS	6O 8846, SAE J1171 when cover is s	secure.

ST-CLB Circuit Breaker Blocks

Compact surface mount solution providing secure screw termination where Push Button Reset-Only CLB Circuit Breakers are desired

- Clear insulating cover with square format label recesses, satisfies ABYC/USCG insulation requirements
- Quick connect clips allow circuit breakers to snap easily into place
- Tin-plated copper busses and screw terminals
- Breakouts allow wire access in two directions
- Accepts ring terminals
- Optional push button waterproof boots or dress nuts can be installed over cover
- · Accepts square labels
- Optional jumper 5049, for use with 5050 and 5051
- Circuit breakers sold separately (p. 71)

Voltage Max. Operating 32V DC

Amperage Max. Operating 32A (per circuit)

Amperage Max. Operating 100A (per block - common source)

Amperage Max. Operating 40A (per jumped circuit group - independent source)

Temp. Operating Range -10°C to 60°C


Breaker Type Push Button Reset-Only Circuit Breaker with


Quick Connect Terminals

Screw Terminal #8-32 Screws with Captive Star Lock Washer
Ring Terminals Screw Terminals #8 (M4), Negative Bus #10 (M5)

Mounting #8 Screw (M4) or #8 Nut


PN	Positions	Negative Bus	Source	[A] Mounting Centers in (mm)	[B] Mounting Centers in (mm)	[C] Height in (mm)
5050	6		Independent	5.63 (142.9)	1.40 (35.6)	6.69 (169.9)
5051	12		Independent	10.13 (257.2)	1.71 (43.4)	11.19 (284.2)
5052	6	#10-32 stud	Common	5.63 (142.9)	1.40 (35.6)	6.69 (169.9)
5054	12	#10-32 stud	Common	10.13 (257.2)	1.71 (43.4)	11.19 (284.2)
5049	ST CLB Bloc	k Jumper, 5 per pa	ack			

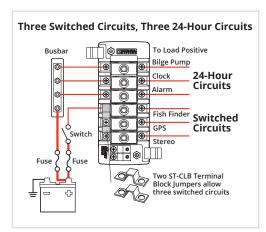
















Push Button Reset-Only CLB Circuit Breakers



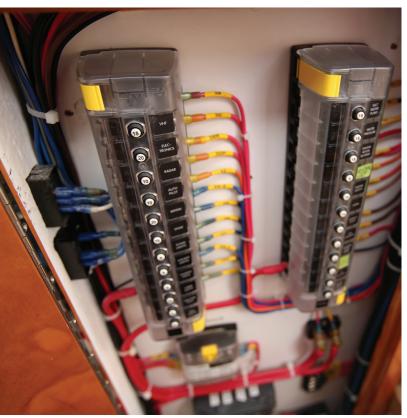

True North Yachts installs ST-CLB blocks aboard their boats, including the True North 38.

CLB Circuit Breaker Waterproof Boots

Protects push button circuit breakers in wet environments

- Used on waterproof panels (p. 108-111)
- Replaces dress nut mounting on circuit breakers

Thread Material Nickel-Plated Brass

Thread 3/8"-27

Regulatory

IP67 – protected against immersion up to 1 meter for 30 minutes







PN	Description	Retail Pack
4135	Clear	2
4136	White	2
4137	Black	2

Related Products



Contura Circuit Breaker Panels p. 110



WeatherDeck Circuit Breaker Panels p. 111



DC Branch Circuit Breaker Panels p. 114



360 Panel Adapter p. 92

Push Button Reset-Only CLB Circuit Breakers

Provides economical circuit protection for 3 to 40 Amp loads when switching is provided elsewhere or not required



- · Quick connect or screw terminal style
- Compact design enables high density circuit protection configurations
- Push-to-reset operation
- Trip Free design cannot be held ON during fault current condition
- · Optional push button waterproof boot

Interrupting Capacity 3,000A @ 14.7V DC / 2,500A @ 28V DC

Voltage Max. Operating 32V DC Temperature Min. Operating -10°C Temperature Max. Operating 60°C

Type Thermal trip, manual reset
Terminals #8 Screw Terminals or

1/4" Male Ouick Connect Terminals

Screw Terminal Torque 6 in-lb max.

Trip Time Delay See bluesea.com
Thread 3/8"-27 UNS

Regulatory


CE marked

UL Recognized – UL 1077 – UL/cUL (USA and Canada), TUV certified Meets UL 1500 and ISO 8846 external ignition protection requirements

IGNITION PROTECTED

See p. 162 for ABYC Interrupting Capacity Requirements.

Screw Terminals PN	Quick Connect Terminals PN	Amps
2129	7050	3A DC
2130	7052	5A DC
2131	7053	7A DC
2132	7054	10A DC
2133	7056	15A DC
2134	7057	20A DC
2135	7058	25A DC
2136	7059	30A DC
2137	7061	ANA DC

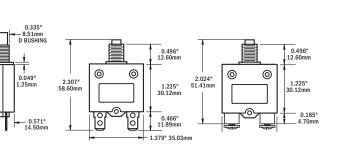

1/4" Male Quick Connect Terminals

#8 Screw Terminals


0.347

0.382" DIA J Ø9.70mm Cutout Dimensions

Medium Duty Push Button Reset-Only Circuit Breakers

Provides circuit protection for 15 to 60 Amp loads when switching is provided elsewhere or not required

- Weatherproof
- · Can be used as Main or Branch
- · Push-to-reset operation
- · Trip Free design cannot be held ON during fault current condition
- · Captive star lock washers meet requirements for anti-rotation and eliminate handling of small, easily dropped parts



3,000A @ 120V AC 32V DC / 120V AC Voltage Max. Operating

Temperature Min. Operating Temperature Max. Operating 74°C

Thermal trip, manual reset Type Terminal Stud #10-32 Stainless Steel

Terminal Stud Torque 30 in-lb max. Trip Time Delay See bluesea.com #8 -32

Mounting Thread

Regulatory


SAE J1428, SAE J553, UL 1077

Meets UL 1500 external ignition protection requirements

PROTECTED

See p. 162 for ABYC Interrupting Capacity Requirements.

PN	Amps
2138	15A DC
2139	20A DC
2140	30A DC
2141	40A DC
2142	50A DC
2143	60A DC



Side View

8Bw, 1.575" 2.00" DIA **Back View** Front View .890" 22.6mm

Marine Grade Short Stop Circuit Breakers

Use a circuit breaker instead of a fuse

• Designed with corrosion resistant materials to withstand harsh environments

IP64 water resistant boot protects against dust and splashing water

- Push-to-reset operation only disconnects when tripped
- · Stainless steel nyloc nuts for secure connections
- · Red insulating boot included in retail package only

Interrupting Capacity 2,500A @ 28V DC Voltage Max. Operating 28V DC -10°C Temperature Min. Operating Temperature Max. Operating 60°C

Type Thermal trip, manual reset

Terminals #10-32" Studs Screw Terminal Torque 24 in-lb max. Trip Time Delay See bluesea.com

Regulatory

IP64, SAE J553, Meets SAE J1171 external ignition protection requirements


PROTECTED


See p. 162 for ABYC Interrupting Capacity Requirements.

PN	Amps
7151	10A DC
7152	15A DC
7153	20A DC
7154	25A DC
7155	30A DC
7156	40A DC
7157	50A DC
7160	Insulating Boot



Shown with Insulating Boot







Push-Button to Reset

73

ATO®/ATC®-Style Low Profile Circuit Breakers NEW

Use a manually resettable circuit breaker instead of an ATO or ATC fuse

- Drop in replacement for ATO and ATC blade style fuses
- Manual push button reset complies with ABYC circuit protection requirements
- Compatible with Water-Resistant ST-Blade Fuse Block with cover secured (p. 58)
- Compatible with all other ST-Blade Fuse blocks without cover

Interrupting Capacity 2,000A @ 28V DC

Voltage Max. Operating 28V DC Temperature Min. Operating -30°C Temperature Max. Operating 77°C

Type Thermal trip, manual reset

Trip Time Delay See bluesea.com

Regulatory SAE J553, SAE J1171



See p. 162 for ABYC Interrupting Capacity Requirements.


PN	Amps	Color	Retail Pack
7062	5A	LT. Brown	2
7063	7.5A	Brown	2
7064	10A	Red	2
7065	15A	Blue	2
7066	20A	Yellow	2
7067	25A	White	2
7068	30A	Green	2



Related Products



ST-Blade Water-Resistant Fuse Block p. 58

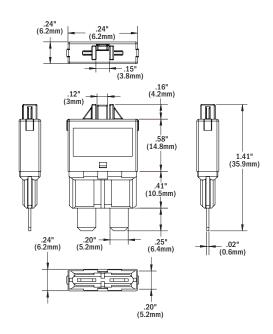

285-Series Circuit Breakers

Provides circuit protection for 25 to 150 Amp loads when switching and circuit protection are both required

- · Visible yellow reset lever shows open condition
- Trip-free design cannot be held closed after trip
- Drop in replacement for 185 Series Circuit Breakers
- 3,000A AIC for medium battery banks

Interrupting Capacity 3,000A @ 48V DC†

Voltage Max. Operating 48V DC
Temperature Min. Operating -40°C
Temperature Max. Operating 85°C
Type Thermal

Class Type III – Switchable/Manual Reset – Trip Free

Terminal Stud M6 (accepts 1/4" Ring Terminal)

Terminal Stud Torque 50 in-lb (7.9 Nm)

Mounting Hole Accepts 1/4" screw (M6)

Regulatory CE marked

Meets SAE J1171 external ignition protection requirements, †AIC ratings achieved using SAE J1625 IP67 – protected against immersion up to 1 meter for 30 minutes (see inside back cover)

IGNITION PROTECTED

See p. 162 for ABYC Interrupting Capacity Requirements.

Panel Mount PN	Surface Mount PN	Amps
7080	7180	25A DC
7081	7181	30A DC
7082	7182	40A DC
7083	7183	50A DC
7084	7184	60A DC
7085	7185	70A DC
7086	7186	80A DC
7087	7187	100A DC
7088	7188	120A DC
7089	7189	150A DC

Circuit Breaker Mounting Options

Provides mounting for Cooper Bussmann® Klixon, 285-Series or 185-Series Panel Mount Circuit Breakers







ΡN Width in (mm) Height in (mm) 7198 Self-trimming molded rubber bezel 2.44 (61.90) 3.31 (84.07) Circuit breaker adapter bezel allows circuit 7098 2.44 (61.90) 3.31 (84.07) breaker mounting in a 2-1/8" round hole Provides circuit breaker mounting 1477 4.88 (123.83) 4.75 (120.65) in the 360 Panel System




Main circuit protection for battery banks up to














7187



Related Products



2719 Enclosure p. 98

187-Series Circuit Breakers

Provides circuit protection for 25 to 200 Amp loads when switching and circuit protection are both required

- Self-trimming case eliminates need for mounting panels or trim bezels
- Visible yellow reset lever shows open condition
- Trip-free design cannot be held closed after trip
- Large clearance around terminal studs accepts up to 1/0 AWG lugs
- Recessed mounting holes for clean appearance
- Robust 5/16"-18 terminals provide high torque connections
- 5,000A AIC for large battery banks

5,000A @ 14V DC Interrupting Capacity

> 3,000A @ 28V DC 1,500A @ 48V DC

Voltage Max. Operating 48V DC Temperature Min. Operating -40°C Temperature Max. Operating 85°C Туре Thermal

Class Type III - Switchable/Manual Reset - Trip Free

Terminal Stud 5/16"-18 Terminal Stud Torque 75 in-lb max. Trip Time Delay See bluesea.com Mounting Hole Accepts #10 (M5) Screw

Regulatory CE marked

Meets SAE J1171 external ignition protection requirements IP66 – protected against powerful water jets (see inside back cover)

IGNITION PROTECTED

See p. 162 for ABYC Interrupting Capacity Requirements.

7035 7135 2	25A DC
7036 7136 3	BOA DC
7038 7138 4	IOA DC
7039 7139 5	OA DC
7040 7140 6	OA DC
7041 7141 7	'0A DC
7042 7142 8	BOA DC
7043 7143 9	OA DC
7044 7144 1	00A DC
7046 7146 1	20A DC
7047 7147 1	35A DC
7048 7148 1	50A DC
7049 7149 2	200A DC






Main circuit protection for battery banks up to








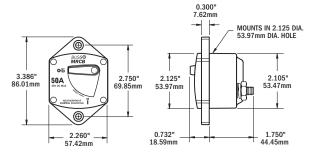



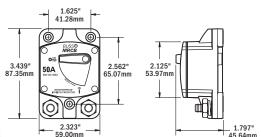

COTS Circuit Breakers Water-Resistant

Suitable for use when government specifications are required

Interrupting Capacity 7500A DC / 1,500A AC Voltage Max. Operating 65V DC / 277V AC Temperature Operating -40° C to 85° C

Switching Cycles 6000 Electrical, 4000 Mechanical Type Magnetic Hydraulic – Trip free

A-Series, Metal Toggle

Terminal Screw #10-32 SS
Terminal Screw Torque 14-15 in-lb
Mounting Screw #6-32 SS
Mounting Screw Torque 7-9 in/lb

Mounting Boss 1/2-32 Hex Nut SS Mounting Nut Torque 30 in-lb max.


Regulatory


UL 1077, CSA certified

Water Resistant - designed and tested in accordance with the MIL-PRF-55629 and MIL—STD-202 specifications

PN	Amps	Poles	Actuator Style
7310	5A	2	Toggle
7311	10A	2	Toggle
7312	15A	2	Toggle
7313	20A	2	Toggle
7314	25A	2	Toggle
7315	30A	2	Toggle
7316	40A	2	Toggle
7317	50A	2	Toggle



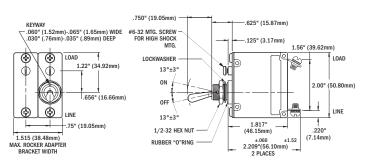



Metal Shark boats builds custom aluminum boats for government agencies. The Custom 360 Panel with Mil-Spec Toggle Circuit Breakers is housed inside the center console and distributes power to critical loads about the Def



UL-489 Circuit Breakers

Expanded line of circuit breakers that meet CFR 46 / CoastGuard requirements

	7440-7446	7454-7459	7461-7467
Interrupting Capacity	10,000A	5000A	5000A
Voltage Max. Operating	80V DC	240V AC	240V AC
Temperature Operating	-40° C to 85° C	-40° C to 85° C	-40° C to 85° C
Туре	C-Series, Magnetic Hydraulic – Trip free	C-Series, Magnetic Hydraulic – Trip free	C-Series, Magnetic Hydraulic – Trip free
Terminal	#10-32 Screw* Tin-Plated Brass	#10-32 Screw Tin-Plated Brass	1/4"-20 Stud Tin-Plated Brass
Terminal Torque	15-20 in-lb*	15-20 in-lb	35 in-lb
Mounting Screw	#6-32 SS	#6-32 SS	#6-32 SS
Mounting Screw Torque	7-9 in-lb	7-9 in-lb	7-9 in-lb
Regulatory			

UL 489, CSA certified, TUV certified

^{* 7446 -} Terminal - 1/4"-20 Stud, Terminal Torque - 30-35 in-lb

PN	Amps	Poles	Actuator Style
7440	5A DC	1	Flat Rocker
7441	10A DC	1	Flat Rocker
7442	15A DC	1	Flat Rocker
7443	20A DC	1	Flat Rocker
7444	30A DC	1	Flat Rocker
7445	50A DC	1	Flat Rocker
7446	100A DC	1	Flat Rocker

PN	Amps	Poles	Actuator Style
7454	5A AC	1	Flat Rocker
7455	10A AC	1	Flat Rocker
7456	15A AC	1	Flat Rocker
7457	20A AC	1	Flat Rocker
7458	30A AC	1	Flat Rocker
7459	50A AC	1	Flat Rocker


PN	Amps	Poles	Actuator Style
7461	10A AC	2	Flat Rocker
7462	15A AC	2	Flat Rocker
7463	20A AC	2	Flat Rocker
7464	25A AC	2	Flat Rocker
7465	30A AC	2	Flat Rocker
7466	30A AC	2	Raised Rocker
7467	50A AC	2	Raised Rocker












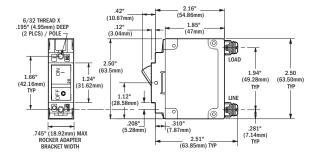



PANEL CUTOUT DETAIL

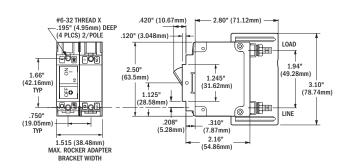



A-Series Toggle Circuit Breakers

Combines switching and circuit protection into a single device









• Single pole is frequently used for AC or DC Branch circuit protection

•	Double	pole is	typically	used	for AC	Main	circuit	protection
---	--------	---------	-----------	------	--------	------	---------	------------

• Trip Free - cannot be held closed after trip

120/240V AC Voltage Nominal Operating Temperature Min. Operating -40°C Temperature Max. Operating 85°C

Switching Cycles 10,000 @ rated amps and volts Magnetic Hydraulic - Trip free Type **Terminal Screw** #10-32 Stainless Steel Terminal Screw Torque 14-15 in-lb Recommended

Trip Time Delay See bluesea.com

Mounting Screw #6-32 Stainless Steel (included) 6-8 in-lb Recommended Mounting Screw Torque

Regulatory

CE marked, TUV certified, CSA certified, UL 1077 recognized


PN	Color	Amps	Poles	Max V DC	1
7197	White	2.5A	1	32V DC	-
7200	Black	5A	1	32V DC	7
7201	Red	5A	1	32V DC	7
7202	White	5A	1	65V DC	7
7347	Black	8A	1	65V DC	-
7299	White	8A	1	65V DC	7
7204	Black	10A	1	65V DC	
7205	Red	10A	1	65V DC	
7206	White	10A	1	65V DC	-
7208	Black	15A	1	32V DC	7
7209	Red	15A	1	32V DC	
7210	White	15A	1	65V DC	7
7212	Black	20A	1	65V DC	-
7213	Red	20A	1	32V DC	7
7214	White	20A	1	65V DC	-
7216	Black	25A	1	65V DC	7
7217	Red	25A	1	65V DC	
7218	White	25A	1	65V DC	
7220	Black	30A	1	32V DC	
7221	Red	30A	1	65V DC	
7222	White	30A	1	65V DC	
7224	Black	40A	1	65V DC	
7225	Red	40A	1	65V DC	
7226	White	40A	1	32V DC	
7228	Black	50A	1	32V DC	
7229	Red	50A	1	65V DC	
7230	White	50A	1	32V DC	

C	PN	Color	Amps	Poles	Max V DC
	7232	Black	10A	2	65V DC
	7233	White	10A	2	65V DC
	7234	Black	15A	2	32V DC
	7235	White	15A	2	65V DC
	7348	Black	16A	2	65V DC
	7294	White	16A	2	65V DC
	7236	Black	20A	2	32V DC
	7260	White	20A	2	32V DC
	7237	Black	30A	2	32V DC
	7238	White	30A	2	65V DC
	7349	Black	32A	2	65V DC
	7295	White	32A	2	65V DC
	7239	Black	40A	2	65V DC
	7240	White	40A	2	32V DC
	7241	Black	50A	2	65V DC
	7242	White	50A	2	65V DC

Interrupting Capacity Table (see ABYC Requirements p. 162)

	UL 1077 - UL/C	SA (US/Canada)	EN60934 - TUV (Europe)
	DC Interrupt	AC Interrupt	AC Interrupt
1 Pole	7500A	3000A	1500A
2 Pole	7500A	3000A	1500A

OVERALL DEPTH 2.00" 50.80mm _ 0.750" 19.05mm OVERALL DEPTH 2.00" 50.80mm 0.130"_ 3.30mm 1.640" 41.66mm 1.050" 26.67mm 2.000" 50.80mm 2.000" 1.560" 39.62mm 6 į. 2.032" 51.61mm 0.170" 4.32mm 0.170" 4.32mm 0.690" 17.50mm



Cutout Dimensions

Related Products







Traditional Metal Panel p. 113

Circuit Breaker Mounting Options

- 3131 enclosure, strain reliefs included for secure installation of circuit breakers
- 3131 enclosure, accepts A-Series Toggle and A and C-Series
- Flat Rocker Circuit Breakers, LEDs (p. 151), and Square Format Labels (p. 152) for custom configurations
- 8072 and 8173 panels, accept A-Series Toggle Circuit Breakers, Large Format Labels (p. 151) and LEDs (p. 152)







8173

PN	Description	Width in (mm)	Height in (mm)	Depth in (mm)
3131	Circuit Breaker Enclosure	3.95 (100.36)	4.92 (124.91)	4.07 (103.40)
8072	Single pole mounting panel	2.63 (66.80)	3.75 (92.25)	0.125 (3.175)
8173	Double pole mounting panel	2.63 (66.80)	3.75 (92.25)	0.125 (3.175)

79

A-Series Rocker Circuit Breakers

Combines switching and circuit protection into a single device



7403 Flat Rocker

- Standard circuit breaker used on the 360 Panel System (1200 Series)
- Flat actuator resists accidental switching by being flush in the ON position





Restricted-OFF Rocker

- Actuator shows white in the OFF position
- Restricted OFF actuator can only be switched to OFF by insertion of small screwdriver into slot





7574 Raised Rocker

 Standard circuit breaker for AC Source Select panels in the 360 Panel System



- · White actuator indicates OFF position
- Single pole is available in Flat Rocker and Restricted Off styles
- Single pole is frequently used for AC or DC Branch circuit protection
- Double pole is available in Flat Rocker and Raised Rocker styles
- Double pole is typically used for AC Main circuit protection
- Raised Rocker actuator style is used for AC source selection on the 360 Panel System
- International ON and OFF symbols support vertical or horizontal mounting

Voltage Nominal Operating 120/240V AC
Temperature Min. Operating 40°C
Temperature Max. Operating 85°C

Switching Cycles 10,000 @ rated amps and volts
Type Magnetic Hydraulic – Trip free

Terminal Screw #10-32 Stainless Steel
Terminal Screw Torque 14–15 in-lb Recommended (load terminal is 30° angled)

Trip Time Delay See bluesea.com

Mounting Screw #6-32 Stainless Steel (included)
Mounting Screw Torque 6-8 in-lb Recommended

Regulatory


CE marked, TUV certified, CSA certified, UL 1077 recognized


Interrupting Capacity Table (see ABYC Requirements p. 162)


	U	EN60934 - TUV (Europe)		
	DC Interrupt 120V AC Interrupt 240V AC Interrupt		AC Interrupt	
1 Pole	5000A	3000A	1500A	1500A
2 Pole	5000A	3000A	3000A	1500A

PN	Amps	Max V DC	Poles	Rocker Actuator
7399	2.5A	32V DC	1	Flat
7400	5A	32V DC	1	Flat
7425	5A	32V DC	1	Restricted-OFF
7401	8A	32V DC	1	Flat
7402	10A	32V DC	1	Flat
7427	10A	32V DC	1	Restricted-OFF
7403	15A	32V DC	1	Flat
7428	15A	32V DC	1	Restricted-OFF
7404	20A	32V DC	1	Flat
7429	20A	32V DC	1	Restricted-OFF
7405	25A	32V DC	1	Flat
7430	25A	32V DC	1	Restricted-OFF
7406	30A	32V DC	1	Flat
7407	40A	32V DC	1	Flat
7408	50A	32V DC	1	Flat
7433	50A	32V DC	1	Restricted-OFF
PN	Amps	Max V DC	Poles	Rocker Actuator
7410	10A	32V DC	2	Flat
7411	15A	32V DC	2	Flat
7412	16A	32V DC	2	Flat
7413	20A	33N DC	2	Flat

7410	10A	32V DC	2	Flat	
7411	15A	32V DC	2	Flat	
7412	16A	32V DC	2	Flat	
7413	20A	32V DC	2	Flat	
7574	30A	32V DC	2	Raised	
7414	30A	32V DC	2	Flat	
7575	32A	32V DC	2	Raised	
7415	32A	32V DC	2	Flat	
7416	40A	32V DC	2	Flat	
7577	50A	32V DC	2	Raised	
7417	50A	32V DC	2	Flat	







Related Products



360 Panel System p. 112

Cutout Dimensions



C-Series Toggle Circuit Breakers

Combines switching and circuit protection into a single device











DC FeaturesLarge framProvides ov

- Large frame provides stud termination for 5–300 Amp loads
- Provides overcurrent protection for inverters, bow thrusters, and windlasses
- Offers high interrupt capacity suitable for Main circuit protection
- Trip Free cannot be held closed after trip

AC Features

- Frequently used for 120/240 Volt AC circuit protection
- Double pole can be used as AC Main circuit breaker to switch hot and neutral or two hots in 120/240 Volt AC Branch applications
- Triple pole can be used as 120/240 Volt AC Main circuit breaker to switch both lines (hots) and neutral
- Double and triple pole circuit breakers will trip all poles if any one pole trips

Voltage Nominal Operating 120/240V AC Temperature Min. Operating -40°C Temperature Max. Operating 85°C

Switching Cycles 10,000 @ rated amps and volts
Type Magnetic Hydraulic – Trip free
Terminal Stud 1/4"-20 Tin-Plated Brass
Terminal Stud Torque 35 in-lb max.

Trip Time Delay See bluesea.com

Mounting Screw #6-32 Stainless Steel (included)
Mounting Screw Torque 6-8 in-lb Recommended

Regulatory

7250I Only – meets SAE J1171, UL 1500, and ISO 8846 external ignition protection requirements



Interrupting Capacity Table (see ABYC Requirements (p. 162)


	UL 1077 - UL/CSA (US/Canada)		EN60934 - TUV (Europe)
	DC Interrupt	AC Interrupt	AC Interrupt
1 Pole	10000A	5000A	5000A
1 Pole 7250I	5000A	1500A	
2 & 3 Pole	5000A	5000A	5000A


Poles Max V DC Color **Amps** White 80V DC 5A DC 7351 White 10A DC 80V DC 7352 White 15A DC 80V DC 7353 White 20A DC 1 80V DC 25A DC 1 80V DC 7354 White 30A DC 1 80V DC 7355 White 7244 White 50A DC 80V DC 7246 White 60A DC 80V DC 65V DC 7248 White 80A DC 7250 White 100A DC 1 65V DC 72501 Red 100A DC 1 48V DC


PN	Color	Amps	Poles	Max V DC
7365	White	30A AC	2	80V DC
7251	White	50A AC	2	80V DC
7254	White	60A AC	2	80V DC
7256	White	80A AC	2	80V DC
7258	White	100A AC	2	65V DC
7267*	White	150A DC	2	65V DC
7268*	White	175A DC	2	65V DC
7269*	White	2004 DC	2	65V DC

PN	Color	Amps	Poles	Max V DC
7287	White	50A AC	3	80V DC
7288	White	60A AC	3	80V DC
7289	White	80A AC	3	80V DC
7290	White	100A AC	3	80V DC
7270*	White	250A DC	3	65V DC
7271*	White	300A DC	3	65V DC

^{*} Paralleled poles have 5/16" stud on bus







Cutout Dimensions

C-Series Toggle Circuit Breaker Mounting Panels


Simplifies mounting C-Series Toggle Circuit Breakers

- Accepts Blue Sea Systems Large Format Labels and ON indicating LEDs
- Panel plugs can be inserted to fill blank positions
- Panel Plug Kit 8089 included circuit breaker mounting screws, panel plug, LED plug and blank label

PN	Description	Width in (mm)	Depth in (mm)
8088	3 position	5.25 (133.35)	3.75 (95.25)
8087	8 position	5.25 (133.35)	7.50 (190.50)
8089	Panel Plug Kit		



8088



8087

Related	Product



Traditional Metal 7372 p. 113

81

C-Series Rocker Circuit Breakers

Combines switching and circuit protection into a single device











/540

DC Features

- · White actuator indicates OFF position
- Large frame provides stud termination for 5–300 Amp loads
- Flat rocker actuator is flush in the ON position, reducing the risk of accidental switching
- Provides overcurrent protection for inverters, bow thrusters, and windlasses
- Trip Free cannot be held closed after trip

Voltage Nominal Operating 120/240V AC
Temperature Min. Operating -40°C
Temperature Max. Operating 85°C

Switching Cycles 10,000 @ rated amperage and voltage

Type Magnetic Hydraulic – Trip free
Terminal Stud 1/4"-20 Tin-Plated Brass

Terminal Stud Torque 35 in-lb max.
Trip Time Delay See bluesea.com

Mounting Screw #6-32 Stainless Steel (included)
Mounting Screw Torque 6-8 in-lb Recommended

Regulatory

Single-pole circuit breakers only – CE marked, meet SAE J1171, UL 1500 and ISO 8846 external

ignition protection requirements, CSA certified, and UL 1077 recognized

AC Circuit breakers only - TUV certified, CSA certified,

and UL 1077 recognized

AC and AC/DC Circuit breakers only – CE marked

Interrupting Capacity Table (see ABYC Requirements (p. 162)

			UL 1077 - UL/CSA (US/Canada)	EN60934 - TUV (Europe)
	Volts	Amps	Interrupt	Interrupt
1 Pole	32V DC	5-100A	5,000A	
	120V AC	5-100A	3,000A	
	240V AC	5-50A	3,500A	
	48V DC	150-300A	5,000A	
2 and 3 Pole	48V DC	150-200A		5,000A
	120/240V AC	30-100A	5,000A	
	240V AC	30-100A		5,000A

AC Features

- Used for 120/240 Volt AC circuit protection
- Double pole can be used as AC Main circuit breaker to switch hot and neutral or two hots in 120/240 Volt AC Branch applications
- Triple pole can be used as 120/240 Volt AC Main circuit breaker to switch both lines (hots) and neutral
- Double and triple pole circuit breakers will trip all poles if any one pole trips

PN	Amps	Max V DC	Poles	Actuator
7540	5A DC	48V DC	1	Flat
7541	10A DC	48V DC	1	Flat
7542	15A DC	48V DC	1	Flat
7543	20A DC	48V DC	1	Flat
7545	30A DC	48V DC	1	Flat
7546	50A DC	48V DC	1	Flat
7547	60A DC	48V DC	1	Flat
7548	80A DC	48V DC	1	Flat
7549	100A DC	48V DC	1	Flat
PN	Amps	Max V DC	Poles	Actuator

PN	Amps	Max V DC	Poles	Actuator
7560	30A AC		2	Flat
7580	30A AC		2	Raised
7561	50A AC		2	Flat
7581	50A AC		2	Raised
7563	80A AC		2	Flat
7583	80A AC		2	Raised
7564	100A AC		2	Flat
7584	100A AC		2	Raised
7475*	150A DC	48V DC	2	Flat
7476*	200A DC	48V DC	2	Flat


PN	Amps	Max V DC	Poles	Actuator
7565	50A AC		3	Flat
7585	50A AC		3	Raised
7568	50A AC		3	Flat
7588	100A AC		3	Raised
7477*	250A DC	48V DC	3	Flat
7554*	300A DC	48V DC	3	Flat


^{*} Paralleled poles have 5/16" stud on bus


Related Product












Cutout Dimensions



AC Ground Faults ELCI, the Boater and ABYC

Understanding Equipment Leakage Circuit Interrupters (ELCIs) and Ground Fault Circuit Interrupters (GFCIs) to make your boat safer. There are two potential failures in a boat's electrical system that can put people on or around the boat at risk of lethal electric shock.


In a properly functioning marine electrical system, the same amount of AC current flows in the hot and neutral wires.

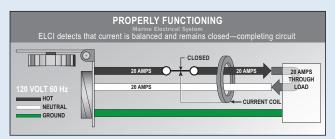

However, if electricity "leaks" from this intended path in these two wires to ground, this condition is called a ground fault. An example of this is an insulation failure in the wiring of an appliance.



In addition, a faulty ground can occur when the grounding path is broken through a loose connection or broken wire. For instance, a shore power cord ground wire may fail due to constant motion and stress.

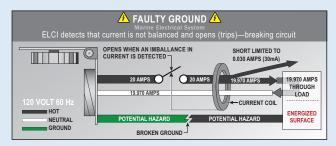

Faulty grounds can be undetectable; a simple continuity test will not necessarily reveal a problem. When these two conditions occur at the same time, the results may be tragic.

The combination of a ground fault and a faulty ground can result in metal parts on the boat and under water becoming energized. If an electric drill with faulty internal wiring or a worn cord falls into the bilge, the water in the bilge will become energized, putting the worker and those nearby at risk.

In addition to the hazard to people on the vessel, there is a larger danger to swimmers near the boat. While people on board are likely to receive a shock from touching energized metal parts, nearby swimmers could receive a paralyzing dose of electricity and drown due to involuntary loss of muscle control.

A Coast Guard sponsored study showed numerous instances of electrical leakage causing drowning or potential drowning even though the shock did not directly cause electrocution.

Given the seriousness of the problem, ABYC requirements now include specific measures for avoiding this danger:

ABYC E-11.13.3.5 states:

If installed in a head, galley, machinery space, or on a weather deck, the receptacle shall be protected by a Type A (nominal 5 milliamperes) Ground Fault Circuit Interrupter (GFCI).


ABYC E-11.11.1 states:

An Equipment Leakage Circuit Interrupter (ELCI) shall be installed with or in addition to the main shore power disconnect circuit breaker(s) or at the additional overcurrent protection as required by E-11.10.2.8.3 whichever is closer to the shore power connection.

ELCIs, and the more familiar GFCIs (Ground Fault Circuit Interrupter), are part of a larger family of devices that measure current flow in the hot and neutral wires and immediately switch the electricity off if an imbalance of current flow is detected. ELCIs and GFCIs that are also RCBOs (Residual Current Circuit Breaker) provide overcurrent tripping protection characteristic of a normal circuit breaker.

GFCIs are used as branch circuit ground fault protection at the 5mA threshold in potentially wet environments. GFCIs protect against flaws in devices plugged into them, but offer no protection from the danger of a failing hard-wired appliance, such as a water heater or cook top.

In contrast, an ELCI provides additional whole-boat protection. Installed as required within 10' of the shore power inlet, an ELCI provides 30mA ground fault protection for the entire AC shore power system beyond the ELCI. ABYC regulations still require the use of GFCIs in environments described above.

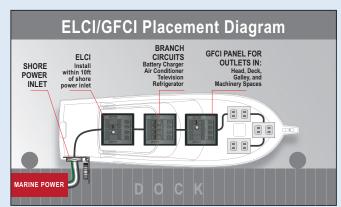

Although ABYC regulations apply only to new boat construction, ELCIs can mitigate dangers and liabilities that exist for any boat owner with a shore power connection. Retrofitting an ELCI to an existing AC system can be a worthwhile safeguard against risk. Since an ELCI/RCBO can serve as the main shore power circuit breaker, it can replace a standard circuit breaker in this application. Alternatively, an ELCI/RCBO can be added between the shore power inlet and the existing main shore power circuit breaker. Safety ground system failures on boats are safety and liability disasters waiting to happen. ELCI protection on each shore power line, combined with protection afforded by GFCIs, will reduce risk to those on the boat, the dock, and in the water surrounding the boat.

*The ABYC has an exemption to this rule if an isolation transformer is used. See E-11 for specific information regarding the exemption.

Residual Current Circuit Breakers

Equipment Circuit Interrupter (ELCI) Main

Residual Current Devices (RCDs) respond to leakage of electrical current outside of the intended circuit path.

When the RCD function is combined with a circuit breaker for over current protection, the device is often referred to as an RCBO. In the USA, a device that trips on leakages of nominally 5mA and meets certain standards is called a Ground Fault Circuit Interrupter (GFCI). A device meeting the same standards but with a trip level of 30mA is called an Equipment Leakage Circuit Interrupter (ELCI). The devices below provide ELCI Main functions and circuit protection in panel mounted breakers.

- · Trips on short circuit, overload, or leakage to ground
- For installation in a power distribution panel
- Provides overcurrent and leakage protection per ABYC E-11 for whole boat shore power protection

Interrupting Capacity 5,000A -35°C Temperature Min. Operating Temperature Max. Operating

Switching Cycles 10,000 @ rated amperage and voltage

Magnetic Hydraulic - Trip free Type

Mounting Screw #6-32 Stainless Steel **Mounting Screw Torque** 6-8 in-lb Recommended

Regulatory

UL 1077, UL 943 Class A, UL 1500

PROTECTED

PN	Description	Frame Series	Nominal Voltage	Actuator	Poles	AC Main Amps	Leakage Trip Amps
3102100	ELCI Main	A-Series	120V AC per pole	Flat Rocker	2	30A	30mA
3103	ELCI Main	C-Series	120V AC per pole	Flat Rocker	2	50A	30mA
3104	ELCI Main	C-Series	120/240V AC per pole	Flat Rocker	3	50A	30mA
3106100	ELCI Main	A-Series	120V AC per pole	White Toggle	2	30A	30mA
3091	ELCI Main	C-Series	230V AC per pole*	Flat Rocker	2	16A	30mA
3092	ELCI Main	C-Series	230V AC per pole*	Flat Rocker	2	32A	30mA
3093	ELCI Main	C-Series	240V AC per polet	Flat Rocker	2	50A	30mA

^{* 230}V AC, Typical of Europe



3102100



3103, 3091, 3092, 3093





Related Products



SMS Surface Mount System p. 84





Residual Current Circuit Breaker **ELCI Main Panels**

^{† 240}V AC, For isolation transformer applications

SMS Surface Mount System Panel Enclosure

Panel enclosure for ELCI Main circuit breakers and other large frame devices. Meets ABYC E-11 when used with an ELCI Main circuit breaker and mounted within 10 feet of the shore power inlet

- · Blank apertures for custom breaker loading
- Clear cover allows easy view of circuit breaker status
- Blank circuit positions accommodate Carling Technologies™ A and C Series Flat Rocker and ELCI Main circuit breakers
- · Stainless steel mounting hardware included

Enclosure Size 6.0" x 6.0" x 4.0"

152 mm x 152 mm x 102 mm

7.6" x 7.4" x 4.7" **Exterior Overall Dimensions**

192 mm x 188 mm x 120 mm

Temperature Range -40°C to 85°C Cover Screws and Hardware 10-32 stainless steel Mounting Hardware Ø 1/4", #12, (6 mm)

Regulatory

IP66 - Protected against powerful water jets when cover is latched Flammability rating – Per UL 508,

Toxicity - Non-toxic, halogen free, RoHS compliant

UL Listed and NEMA 4X rated, NEMA Type 4, 4X, 6, 6P, 12, and 13

Interrupting Capacity Table (see ABYC Requirements (p. 162)









Description	6 blank circuit positions
Circuit Breakers Installed	
Glands Included	
LEDs Installed	
Labels Included	30 Basic DC (4205) 30 Basic AC (4206) Panel Voltage ID Labels

3113

ELCI Main + 3 blank circuit positions
1 × ELCI Main 120V, 30A, 30mA (3102)
2 × (3124) 3 × (3125)
4 × green ON indicating 120V AC (8034) 1 × red Reverse Polarity 120V AC (8066)
1 × AC Main, 1 Reverse Polarity 1 × ELCI, 30 Basic AC (4206) Panel Voltage ID - 120V AC

3117
120V AC ELCI 30A Dual
2 × ELCI Main 120V 30A, 30mA (3102)
2 × (3124) 4 × (3125)
2 × green ON indicating 120V AC (8034) 2 × red Reverse Polarity 120V AC (8066)
Source Selection label Set - 10 labels 2 × Reverse Polarity, 2 ELCI







Panel Voltage ID - 120V AC

PN	3118	3119	3120
Total Positions	ELCI Main + 2 blank circuit positions	ELCI Main + 1 blank circuit positions	ELCI Main + 2 blank circuit positions
Circuit Breakers Installed	1 × ELCI Main 120V 50A, 30mA (3103)	1 × ELCI Main 120/240V, 50A, 30mA (3104)	1 × ELCI Main 240V, 50A, 30mA (3093)
Glands Included	2 × (3124) 1 × (3125) 2 × (3126)	2 × (3124) 1 × (3125) 2 × (3126)	2 × (3124) 1 × (3125) 2 × (3126)
LEDs Installed	3 × green ON indicating 120V AC (8034) 1 × red "Reverse Polarity" 120V AC (8066)	3 × green ON indicating 120V AC (8034) 1 × red Reverse Polarity 120V AC (8066)	2 × green ON indicating 240V AC (6806)
Labels Included	1 × AC Main, 1 Reverse Polarity 1 × ELCI, 30 Basic AC (4206) Panel Voltage ID - 120V AC	1 × AC Main, 1 Reverse Polarity 1 × ELCI, 30 Basic AC (4206) Panel Voltage ID - 120V/240V AC	1 × AC Main, 1 ELCI Panel Voltage ID - 240V AC

SMS Surface Mount System Panel Enclosure Glands


Used on the SMS Surface Mount System Panel Enclosures










PN	3124	3125	3126
Description	Small Gland PG7	Medium Gland PG16	Large Gland PG29
Wire Size	#14 to #10 Single Wire	#14 to #10 Cable, 3 Conductor	#6 Cable, 4 Conductor
Cable Dia. Minimum	.114 in (2.9 mm)	.230 in (2.9 mm)	.590 in (15.0 mm)
Cable Dia. Maximum	.250 in (6.4 mm)	.530 in (2.9 mm)	.990 in (25.4 mm)
Dimensions in (mm)	A. Clearance Hole .492 (12.5) B. Max. O. A. Length 1.17 (29.7) C. Wrenching Flats .59 (15.0)	A. Clearance Hole .886 (22.5) B. Max. O. A. Length 1.66 (42.2) C. Wrenching Flats 1.05 in (26.7)	A. Clearance Hole 1.47 (37.3) B. Max. O. A. Length 2.23 (56.6) C. Wrenching Flats 1.66 (42.2)









Related Products



A-Series Rocker Circuit Breakers p. 79




C-Series Rocker Circuit Breakers p. 81



ELCI Circuit Breakers p. 83



Circuit Breaker Enclosure p. 78

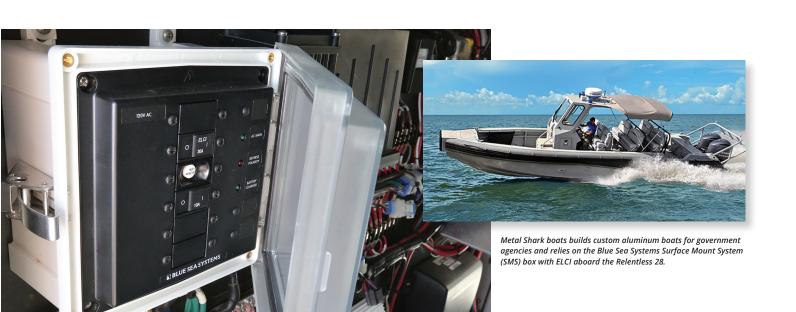

Circuit Breaker Specification Table

DC Thermal Circuit Breakers

Product	Push Button Reset-Only	Medium Duty Push Button Reset-Only*	Short Stop	ATO/ATC-Style Low Profile	285-Series	187-Series
	CE CONTROL OF THE PROPERTY OF	AC/DC		NEW		100A
Page number	71	72	72	73	74	75
Interrupting Capacity	3,000A @ 14.7V DC 2,500A @ 28V DC	5,000A @ 32V DC 3,000A @ 120V AC*	2,500A @ 28V DC	2,000A @ 28V DC	3,000A @ 48V DC [†]	5,000A @ 12V DC 3,000A @ 24V DC 1,500A @ 42V DC
			2,500A @ 28V DC	2,000A @ 28V DC	3,000A @ 48V DC [†]	3,000A @ 24V DC
Capacity	2,500A @ 28V DC	3,000A @ 120V AC*	, -	, -	·	3,000A @ 24V DC 1,500A @ 42V DC

^{*} Medium Duty Push Button Reset-Only Circuit Breakers are AC/DC rated \dagger AIC ratings achieved using SAE J1625

AC/DC A-Series Circuit Breakers

Product	A-Series Toggle	A-Series Flat Rocker	A-Series Restricted Off Rocker	A-Series Toggle	A-Series Flat Rocker	A-Series Raised Rocker		
		0 0 1 01				D 0 1		
Page number	78	79	79	78	79	79		
Interrupting Capacity DC	7,500A @ 65V DC	5,000A @	9 32V DC	7,500A @ 65V DC	5,000A @ 32V DC			
Interrupting Capacity AC	3,000A @ 120V AC 3,000A @ 250V AC		125V AC 250V AC	3,000A @ 120V AC 3,000A @ 120/240V AC 3,000A @ 250V AC	3,000A @	240V AC		
Max. Voltage DC	65V DC	32V	'DC	65V DC	32V DC			
Max. Voltage AC		250\	V AC	1	240V AC			
Poles		1			2			
Amperages	2.5-50A	2.5–50A 2.5–50A 5–50A			10-50A			
Regulatory				TUV certified, ed, UL 1077				

AC/DC Military Grade and C-Series Circuit Breakers

Product Style	COTS Water Resistant	AC UL-489 Rocker	DC UL-489 Rocker	C-Series Toggle	C-Series Toggle	C-Series Flat Rocker
	e ye	T. P.				20,100
Page number	76	77	77	80	80	81
Interrupting Capacity DC	7500A	-	10,000A	10,000A @ 80V DC	10,000A @ 80V DC	5,000A @ 32V DC
Interrupting Capacity AC	1500A	5000A	-	5,000A @ 125V AC 5,000A @ 250V AC	5,000A @ 125V AC 5,000A @ 250V AC	3,000A @ 120V AC 3,500A @ 240V AC
Max. Voltage DC	65V DC	-		80V DC		32V DC
Max. Voltage AC	-	240V AC	-	250	V AC	240V AC
Poles	2	1 & 2			1	
Amperages	5-50A	5-50A	5-100A	5-100A	100A	5-100A
Regulatory	UL 1077, CSA certified	UL 489, CS TUV ce	A certified ertified		SAE J1171, UL 1500, ISO 8846	CE marked, SAE J1171, UL 1500, ISO 8846, CSA certified, UL 1077

DC C-Series Circuit Breakers

Product Style	C-Series Toggle	C-Series Flat Rocker	C-Series Toggle	C-Series Flat Rocker
Page number	80	81	80	81
Interrupting	5 000A O (5V/DC	5,000A O 40V DC	5 000A O CEV DC	5 000A O 40V DC
Capacity	5,000A @ 65V DC	5,000A @ 48V DC	5,000A @ 65V DC	5,000A @ 48V DC
Max. Voltage	65V DC	48V DC	65V DC	48V DC
Poles		2	:	3
Amperages	150-	200A	250-	300A
Regulatory				

AC C-Series Circuit Breakers

Product Style	C-Series Toggle	C-Series Raised Rocker	C-Series Flat Rocker	C-Series Toggle	C-Series Raised Rocker	C-Series Flat Rocker
Page number	80	81	81	80	81	81
Interrupting Capacity	5,000A @ 125/250V AC 5,000A @ 250V AC	5,000A @ 1: 5,000A @		5,000A @ 125/250V AC 5,000A @ 250V AC	5,000A @ 1. 5,000A @	20/240V AC 240V AC
Max. Voltage	250V AC	240\	/ AC	250V AC 240V AC		V AC
Poles	2		3			
Amperages	30-100A				50-100A	
Regulatory		CE marked, TUV certified	d, CSA certified, UL 1077		CE marked, TUV certified	d, CSA certified, UL 1077

AC ELCI Main Circuit Breakers

Product	ELCI Main	ELCI Main	ELCI Main	ELCI Main		ELCI Main		
					!			
Page number	83	83	83	83	3091* (83)	3092* (83)	3093 [†] (83)	
Interrupting Capacity			500	00A	230V per pole 240V per p			
Nominal Voltage				120/240V per pole			240V per pole	
Amperage	30)A	50A	50A	16A	32A	50A	
Leakage Trip Amps		30mA		30mA		30mA		
Regulatory			UL 1077, UL 943	Class A, UL 1500				

^{* 230}V AC, Typical of Europe † 240V AC, For isolation transformer applications

Water-Resistant Contura Switches

Specifically manufactured for use in Blue Sea Systems **Contura Water Resistant Panels**



Use of non Blue Sea Systems Contura Switches will not maintain the water resistant ingress protection rating of Blue Sea Systems panels.

- Vibration, shock, thermoshock, moisture and salt spray resistant
- Mounts in Blue Sea Systems Contura Water Resistant Panels (p. 110) and Contura Switch Mounting Panels (p. 90)

Amperage Max. Operating

20A @ 12V DC, 15A @ 24V DC

Amperage Operating Current 18 Milliamps

Lighted Seals

LED rated 100,000 hours half-life Internal and external gasket panel seal

Temperature Rating -40°C to 85°C

1.45 in x 0.83 in (36.83 mm x 21.08 mm)

Mounting Hole Regulatory

CE marked

Meets UL 1500 and ISO 8846 external ignition protection requirements

PROTECTED

PN Contura II Black	PN Contura III Gray	PN Contura III Black	Actuator Position to Light LED	Pole Throw	Action ()=momentary	LEDs
7929	8230	8282	ON	SPST	OFF-ON	1
7930	8231	8292		SPST	OFF-(ON)	0
7931	8232	8283	ON	SPDT	ON-OFF-ON	2
7932	8233	8284	ON	SPDT	(ON)-OFF-ON	1
7933	8234	8285		SPDT	(ON)-OFF-(ON)	0
7943	7944	7945	(ON)	SPDT	(ON)-OFF-ON	1
7934	8218	8287	ON	DPST	OFF-ON	1
7935	8219	8288		DPST	OFF-(ON)	0
7936	8220	8286	ON	DPDT	ON-OFF-ON	2
7937	8221	8289	ON	DPDT	(ON)-OFF-ON	1
7938	8222	8290		DPDT	(ON)-OFF-(ON)	0
7939	8275	8300	ON	DPDT	ON-ON	2

See p. 93 for common applications

Water-Resistant Contura Dimmer and **m**-LVD Switches



- Mounts in Blue Sea Systems Contura Water-Resistant Panels (p. 110) and Contura Switch Mounting Panels (p. 90)
- Dimmer Switch Legend BRIGHT and DIM
- · m-LVD Switch Legend-OVERRIDE and OFF
- Ignition protected safe for installation aboard gasoline powered boats

Amperage Max. Operating 20A @ 12V DC, 15A @ 24V DC

Pole, Throw **SPDT**

Action (ON)-OFF-(ON) Terminal Size 0.25 in (6.35 mm) Terminal Type Quick Connect Tab


Seals Internal and external gasket panel seal

Temperature Rating -40°C to 85°C

1.45 x 0.83 in (36.83 x 21.08 mm) Mounting Hole

Regulatory CE marked

PN	For Use With:	LEDs
8216	DeckHand Dimmer (p. 23)	
8291	DeckHand Dimmer (p. 23)	
7928	m-LVD Low Voltage Disconnect (p. 36)	1

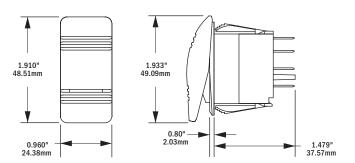

Related Products



Contura Circuit Breaker Panels p. 110



Related Products



DeckHand Dimmers p. 23



p. 36

89

Remote Control Contura Switches

Provide remote switching of ML-Series Products





2145, 2155

2146

- Vibration, shock, thermoshock, moisture and salt spray resistant
- Lockout slide reduces the risk of accidental switching 2145 and 2155

Amperage Max. Operating 20A @ 12V DC, 15A @ 24V DC

Amperage Operating Current 18mA
Temperature Range -40°C - 85°C
Pole/Throw SPDT


Lighting LED rated 100,000 hours half-life
Seals Internal and external gasket panel seal
Mounting Hole 1.45" x 0.83" (36.83 mm x 21.08 mm)

Regulatory

Meets UL 1500 and ISO 8846 external ignition protection requirements IP67 – protected against immersion up to 1 meter for 30 minutes

IGNITION PROTECTED

PN	For Use With:	Pole Throw	Action ()=momentary
2145	ML-Series 7700, 7701, 7702, 7703 (p. 39)	SPDT	(ON)-OFF-(ON)
2146	ML-Series 7620, 7622, 7621, 7623 (p. 47)	SPDT	ON-OFF-ON
2155	ML-Series 7713, 7717 (p. 39)	SPDT	ON-ON

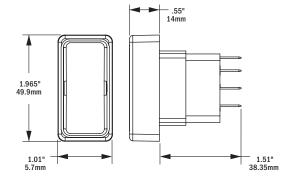

Related Products






Contura Switch Mounting Panel Plug

Covers Contura Switch mounting hole for future switch installation



• For use with Contura Switch Mounting Panels

PN	Description
8278	Contura Switch Mounting Panel Plug

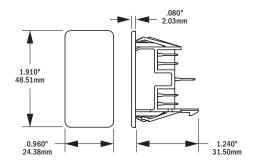

Related Products



Contura Switch Mounting Panels p. 90

Contura Switch Actuators

Replaces actuators on Blue Sea Systems Contura Water-Resistant Panels



• Mounts on any Blue Sea Systems Water Resistant Contura Switch

PN Gray	PN Black	Lenses	
8299	8296		
8297	8294	1	
8298	8295	2	
8293	Actuator Remo	oval Tool	

Remote Control Switch 360 Panels

Use with ML-Series Remote Battery Switches or Automatic Charging Relays

- · Backlit labels
- · Lockout slides
- Square format label set 4218 (p. 152)






1147 Switches: 2145 (2); 2146 (1)

1148 Switches: 2145 (3)

PN	Description	Max. Volts	Width in (mm)	Height in (mm)	Depth in (mm)
1147	2 RBS and 1 ACR	24V DC	4.88 (123.83)	4.75 (120.65)	2.00 (50.80)
1148	3 RBS	24V DC	4.88 (123.83)	4.75 (120.65)	2.00 (50.80)
1520	3 Blank Apertures		4.88 (123.83)	4.75 (120.65)	0.125 (3.175)

Contura Switch Mounting Panels

Modular design permits assembly in groups

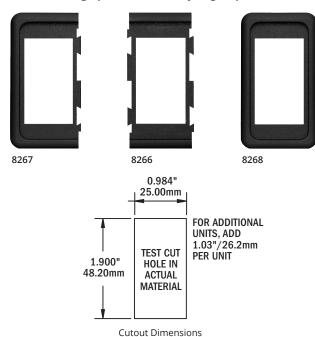

- Mounting panels available in 1, 3, and 6 fixed position models $\,$
- Designed for mounting in 6 different panel thicknesses:
 0.06 in (1.57 mm)
 0.09 in (2.36 mm)
 0.13 in (3.17 mm)
 0.19 in (4.75 mm)
 0.25 in (6.35 mm)
 0.38 in (9.52 mm)

PN	Description	Width in (mm)	Height in (mm)
8267	End Mounting Panel	1.19 (30.23)	2.30 (58.42)
8266	Center Mounting Panel	1.03 (26.16)	2.30 (58.42)
8268	1 Position Mounting Panel	1.34 (34.04)	2.30 (58.42)
8259	3 Position Mounting Panel	3.40 (86.36)	2.30 (58.42)
8260	6 Position Mounting Panel	6.49 (164.85)	2.30 (58.42)

Dual Bilge Pump 360 Panel

Controls two bilge pumps with restricted-off circuit breakers and manual override switches

- · Controls two bilge pumps
- Restricted-OFF circuit breakers provide 24-hour circuit protection to the bilge pump float switch
- On-indicating LED indicates power is available at the bilge pump float switch
- Manual override switch with on-indicating LED provides visual indication pump is running; also illuminates when pump is running as a result of float switch operation



PN	Description	Width in (mm)	Height in (mm)
1522	Dual Bilge Pump Control Panel	4.88 (123.83)	4.75 (120.65)

360 Panel Rocker Switches

Provides switching options for different configurations **Specifications**

Amperage Max. Operating See table below

Single Pole 0.187 in (4.80 mm) Quick Connect Tabs
Double Pole 6.00 in (152.00 mm) Wire Leads

	Pole-			Action	Amp	s Max	. Opera	ting
PN	Throw	Poles	Image	() = Momentary	12V DC	24V DC	125V AC	250V AC
7480	SPST	Single	1	OFF-ON	10A	10A	10A	10A
7481	SPST	Single	1	OFF-(ON)	10A	10A	12A	6A
7482	SPDT	Single	2	ON-OFF-ON	10A	8A	8A	8A
7483	SPDT	Single	2	(ON)-OFF-ON	10A	8A	8A	8A
7484	SPDT	Single	2	(ON)-OFF-(ON)	10A	8A	8A	8A
7485	SPDT	Single	4	(ON)-OFF-(ON)	10A	8A	8A	8A
7490	DPST	Double	1	OFF-ON	5A	5A	8A	4A
7491	DPDT	Double	3	ON-ON	5A	5A	8A	4A
7492	DPDT	Double	2	ON-OFF-ON	5A	5A	8A	4A
7493	DPDT	Double	3	ON-(ON)	5A	5A	8A	4A
7494	DPDT	Double	2	(ON)-OFF-ON	5A	5A	8A	4A
7495	DPDT	Double	2	(ON)-OFF-(ON)	5A	5A	8A	4A



Recommended Panel Oper	+.0	00 [.00]004 [.10]		
PANELTHICKNESS	А	В	_	⋖ B ►
.030" (.76mm)050" (1.27mm)	.508" (12.90mm)	.756" (19.20mm)	1	TEST CUT HOLE IN
.050" (1.27mm)078" (1.98mm)	.508" (12.90mm)	.764" (19.40mm)	A	ACTUAL
.078" (1.98mm)125" (3.17mm)	.508" (12.90mm)	.780" (19.81mm)	*	MATERIAL

Push Button Switches

Contemporary and compact 10A, 15A, & 20A switching

- Two push button illumination options to choose from backlit and LED ring
- 316 Stainless Steel for optimal appearance and corrosion resistance
- · IP67 waterproof with O-ring panel gasket and molded rear cover
- · Reverse polarity protected

	4160, 4161 4162, 4163	4180 4181	4190 4192
Amperage Max. Operating	10A @ 12V DC	15A @ 12V DC	20A @12V DC
Voltage Nominal	12V DC	12V DC	12V DC
Max. LED Operating Current	20mA	20mA	20mA
Switching Cycles	40,000	10,000	60,000
Temperature Range	-10°C to 70°C 14°F to 158°F	-20°C to 55°C -4°F to 131°F	-30°C to 85°C -22°F to 185°F
Termination	5 – 0.110" Quick Connect tabs terminals included	3" Bare Pigtails 	6" Bare Pigtails 0.187" Quick Connect tabs
Wire Size		8-16 AWG	14 AWG
Panel Thickness	.04"31"	.04"24"	.04"24"
	1-8mm	1-6mm	1-6mm
Mounting Hole Diameter	3/4" (19mm)	7/8" (22.35mm)	3/4" (19mm)

IP67 – protected against immersion up to 1 meter for 30 minutes (See inside back cover)

Push Button Switch Label Kit

ICON Labels used on Backlit Push Button Switches

- Scratch resistant polycarbonate material
- Back printed for durability
- Waterproof adhesive for longevity in wet environments
- Can be ordered individually or custom text see (p. 152)



PN	Description	Quantity
4230	Icon Label Kit	50 labels

Related Products







Individual and Custom Round Icon Labels p. 152

10A LED Ring Push Button Switches



15A Backlit Push Button Switches

- · Backlit button is blue when OFF and red when ON
- Five ICON labels included: Accessory, Lights, Anchor Light, Running Light, and Bilge Pump
- · Additional 50 ICON label kit sold separately



5 ICON labels included

20A LED Ring Push Button Switches

· Red or Blue LED ON indication ring



PN	LED	Action
4190	Blue	OFF-ON
4192	Red	OFF-ON

WeatherDeck® Toggle Switches

For use in WeatherDeck Waterproof Panels





- Manufactured for use in WeatherDeck Waterproof Panels (p. 111)
- Nickel-plated brass and phenolic non-corrosive construction

	4150-4154	4155
Amperage Max. Operating	10A @ 250V AC	-
	15A @ 125V AC	-
	15A @ 12V DC	5A @ 30V DC
Voltage Max. Operating	250V AC	30V DC
Terminal Size	0.25 in (6.35 mm)	0.25 in (6.35 mm)
Terminal Type	Quick Connect Tab	Quick Connect Tab

PN	Pole/Throw	Action () = Momentary
4150	SPST	OFF-ON
4151	SPST	OFF-(ON)
4152	SPDT	ON-OFF-ON
4153	SPDT	(ON)-OFF-ON
4154	SPDT	(ON)-OFF-(ON)
4155	DPDT	ON-OFF-ON

WeatherDeck® Toggle Switch Boot

Replaces boot on WeatherDeck Waterproof Panels



- For mounting on WeatherDeck Toggle Switches above
- UV resistant material resists discoloration and cracking
- Rated IP67 protected against immersion up to 1 meter for 30 minutes (See inside back cover)

Thread Material Nickel Plated Brass
Thread 15/32"-32UNS-2A

PN Description
4138 WeatherDeck Toggle Switch Boot

Related Products



WeatherDeck Panel

Panel Switches

Mounts in an A-Series toggle circuit breaker aperture to provide multiple throw and switch configurations when circuit protection is provided elsewhere





Duck Button

- Ideal for generator starters, bilge pumps, horns, wipers, engine controls and other applications that require switching action other than ON-OFF or different pole configuration separate from circuit protection
- For use with A-Series Toggle Circuit Breaker Mounting Panel (p. 78)
- Supplied with mounting adapter for standard 5/8" circuit breaker mounting hole
- Nickel-plated brass and phenolic non-corrosive construction

	roggie	Push Button
Amperage Max. Operating	10A @ 250V AC	3A @ 250V AC
	15A @ 125V AC	6A @ 125V AC
	15A @ 32V DC	6A @ 32V DC
Terminal Size	0.25 in (6.35 mm)	0.25 in (6.35 mm)
Terminal Type	Quick Connect Tab	Quick Connect Tab
Actuator Color	White	White

PN	Actuator	Pole/Throw	Action () = Momentary
8200	Push Button	SPST	OFF-(ON)
8204	Toggle	SPST	OFF-ON
8205	Toggle	SPST	OFF-(ON)
8206	Toggle	SPDT	ON-OFF-ON
8207	Toggle	SPDT	(ON)-OFF-ON
8208	Toggle	SPDT	(ON)-OFF-(ON)
8209	Toggle	DPST*	OFF-ON-(ON) / OFF-OFF-(ON)
8210	Toggle	DPST	OFF-ON
8211	Toggle	DPDT	ON-OFF-ON
8212	Toggle	DPDT	(ON)-OFF-ON

^{*} Progressive two circuit switch - maintains Circuit 1 while momentarily switching Circuit 2

360 Panel Adapters and Plugs

Adapters allow mounting alternative switches and circuit breakers in the flat rocker aperture. Plugs fill empty flat rocker apertures.



PN	Description
4111	Adapts Push Button Reset-Only Circuit Breaker (p. 72)
4112	Adapts A-Series Toggle Circuit Breaker (p. 78) and Panel Switch
4119	Adapts 360 Panel Rocker Switch (p. 90)
4116	Panel Plug fills flat rocker circuit breaker aperture
4117	Panel Plug fills 360 Panel Rocker Switch aperture
8037	Panel Plugs fill Toggle Circuit Breaker aperture (6 pack)

WeatherDeck®

Toggle

LED Ring Backlit Push-Button Push-Button

360 Panel Rockers

DPDT

ON-ON

Switching between shunts or current transformers with

one meter

7939

8275

8300

7491



Panel

Switch

Switch Comparison

Switch	Type	and	Action	Legend
--------	------	-----	---------------	--------

SPST Single Pole, Single Throw: Turns a single circuit on and off.



Panel

Switch

Turns a sing	le circuit on and	off.	2.000	,			I ROUNCIS				01111011	J
	Pole, Double T											
	f two circuits on.											
	e Pole, Single T											
	rcuits on at the s e Pole, Double T											
		pairs of circuits.	-								THE RESERVE	9.1
/	reale iii edeii oi z	pans of circuits.				1 20	THE STREET					
Center Term	inal Switch Lever	() = Momentary					0					
Terminal	illiai Switch Ecver	() – Momentary					0			3	0	0
 Off Position 												
		Common										
Switch T	ype and Action		p. 88	p. 88	p. 88	p. 89	p. 90	p. 91	p. 91	p. 92	p. 92	p. 92
SPST						'		4160 (blue)	,	· ·		
•,								4160 (blue)				
7	OFF-ON	Lights	7929	8230	8282	-	7480	4190 (blue)	4180	4150		8204
•								4192 (red)				
SPST												
•/	OFF-(ON)	Horn or	7930	8231	8292		7481	4161 (blue)	4181	4151	8200	8205
•	OFF-(ON)	Windshield wipers	7930	8231	8292	-	7461	4163 (red)	4181	4151	8200	8205
SPDT		Combining nav										
$\bullet \circ \bullet$	ON-OFF-ON	lights or anchor light	7931	8232	8283	2146	7482			4152		8206
•		with independent bulbs										
CDDT												
SPDT • ♀ •		Windshield wipers LED - ON	7932	8233	8284		7483			4153		8207
I	(ON)-OFF-ON	Bilge pumps										
•		LED - (ON)	7943	7944	7945							
SPDT												
• 1 •		Control switch for SafetyHub 250 and										
•	ON-ON	ML-Series RBS 7712				2155						
		and 7714										
SPDT		Intermittent wiper, Trim tabs, Control										
• 9 •	(ON)-OFF-(ON)	Trim tabs, Control switch for ML-Series	7933	8234	8285	2145	7484 7485			4154		8208
•	(ON)-OFF-(ON)	RBS except 7712 and 7714	7933	0234	0203	2145	7404 7403			4154		0200
		and 7714										
DPST												
//	OFF-ON	Navigational lights	7934	8218	8287		7490					8210
4 4												
DPST												
<i>}</i> /	OFF-(ON)	Wipers or horn	7935	8219	8288							
DPST		Combining nav										
•, •,	OFF-ON-(ON)	lights and anchor										
<i>}</i> /	OFF-OFF-(ON)	lights with shared										8209
• •		switch										
DPDT		Combining nav										
• 9 • • 9	ON-OFF-ON	lights with anchor	7936	8220	8286		7492			4155		8211
1	ON-OIT-ON	light with	7550	0220	0200		7432			4155		0211
	shared bulb											
DPDT	_											
-00	(ON)-OFF-ON	Dual wipers	7937	8221	8289		7494					8212
• •												
DPDT												
00000		Power operated										
II	(ON)-OFF-(ON)	Power operated hatches	7938	8222	8290		7495					
•												
DPDT												
• [• •]	0 1/01/	Bilge pump with					7400					
1	ON-(ON)	2 circuits					7493					
	1	1		I .	1	1	I		I .	1		1

Contura II | Contura III | Contura III | Contura ML | Black | Control

Gray

CONNECTORS & INSULATORS

Water-Resistant 100A BusBar



Provides secure water-resistant bussing for harsh environments. The single side nesting design allows for wire entry from one side to maximize space.

Common BusBars





BusBars distribute positive wires or collect negative returns. BusBars range in capacity from 100A to 600A, with a variety of terminal stud configurations.

Terminal Blocks





Terminal blocks allow termination of wires from a multi-conductor cable in one location. Individual wires can then be split off to various loads.

PowerBars





Complex wiring systems require a single point to consolidate large and small conductors.



CONNECTORS & INSULATORS

PowerPost Connectors



Insulated single stainless steel stud terminates multiple large conductors, or collects small wires with tin-plated copper bus.

Feed Through Connectors



Eliminates chafe and provides strain relief when passing high current through hulls, decks, and bulkheads.

CableCaps





Provides insulation for multiple types of battery posts.

CableClams









Provides a waterproof pass-through for antenna cables without requiring removal of the factory installed connector.



Water-Resistant - 100A BusBar NEW

Provides secure water-resistant bussing for harsh environments. The single side nesting design allows for wire entry from one side to maximize space.

- Water-resistant design with standard ring or fork type terminals allows for simple wiring with standard tools.
- · Accepts a wide range of wire sizes
- Includes 3 wire plugs to maintain water-resistant rating if less than 4 wires are used
- Nests with other Water-Resistant 100A Common BusBars and ST-Blade Water-Resistant Fuse Block for space saving wiring
- Ideal for positive distribution and for the collection of negative or AC ground circuits
- Insulating cover meets ABYC/USCG insulation requirements
- Tin-plated copper busses and fuse clips
- Includes four write-on circuit labels
- Small format standard and custom labels available


Continuous Rating 100A AC / 100A DC
Voltage Max. Operating 300V AC / 48V DC
Input Wire Size (1) 8 AWG to 4 AWG
Load Wire Size (4) 16 AWG to 10 AWG
Mounting Holes Accepts 1/4" (6mm) Screws
Bus Material Tin-Plated Copper C11000

Regulatory CE certified

PN	Cover	Terminal Screws	Terminal Studs
2356	Yes	4 × #8-32	1 × #10-32

For the dimensioned drawings see page 58



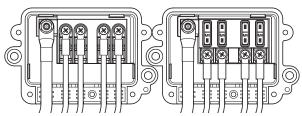

Nested ST-Blade Water-Resistant Fuse Block 5056 and Water-Resistant - 100A BusBar 2356

Related Products



ST-Blade Water-Resistant Fuse Block p. 58

MiniBus - 100A Common BusBars

Provides busing for limited space applications

One-piece serrated flange nut ensures correct and secure connections

Continuous Rating 100A AC / 100A DC

Voltage Max. Operating 300V AC / 48V DC

Mounting Holes Accepts #10 (M5) Screws

Bus Material Tin-Plated Copper C11000

Regulatory CE certified


N Cover


PN	Cover	Terminal Screws	Terminal Studs
2304		5 × #8-32	2 × #10-32
2314	Yes	5 × #8-32	2 × #10-32
2305			4 × #10-32
2315	Yes		4 × #10-32
2306		6 × #8-32	
2713	Cover For Mi	niBus 2304 and 2305	







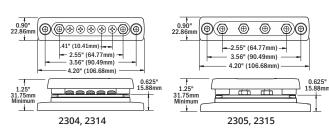





DualBus-100A Common BusBars

Combines two buses on one block

 Combines negative and positive buses for DC Systems and neutral and ground buses for AC Systems


Continuous Rating 100A AC / 100A DC
Voltage Max. Operating 300V AC / 48V DC
Bus Material Tin-Plated Copper C11000


Regulatory CE certified

PN	Cover	Terminal Screws	Mounting Holes
2701		5 per bus × #8-32	Accept #10 (M5) Screws
2702		10 per bus × #8-32	Accept #10 (M5) Screws
2709	Cover for 2701		
2710	Cover for 2702		









DualBus Plus - 150A Common BusBars

Secure, clear polycarbonate cover snaps on easily to meet ABYC insulation requirements

- Combines negative and positive buses on one block
- · Cover release buttons
- One-piece stainless flange nuts ensure safe and secure connections

Continuous Rating 130A AC / 150A DC
Voltage Max. Operating 300V AC / 48V DC
Mounting Holes Accept #10 (M5) Screws
Bus Material Tin-Plated Copper C11000

PN	Terminal Screws	Terminal Studs
2722	5 per bus × #10-32	2 per bus × 1/4"-20 Stud
2723	5 per hus x #10-32	2 per bus × 5/16"-18 Stud



150A Common BusBars

Insert-molded stainless steel studs eliminate the need for securing nuts and allow high torquing for excellent electrical contact

- For positive distribution and for the collection of negative or AC ground circuits
- One-piece serrated flange nut ensures correct and secure connections

Continuous Rating 130A AC / 150A DC

Voltage Max. Operating 300V AC / 48V DC

Mounting Holes Accepts #10 (M5) Screws

Bus Material Tin-Plated Copper C11000

Regulatory CE certified

PN	Cover	Terminal Screw	Terminal Stud
2301		10 × #8-32	2 × 1/4"-20
2300	Yes	10 × #8-32	2 × 1/4"-20
2302		20 × #8-32	2 × 1/4"-20
2312	Yes	20 × #8-32	2 × 1/4"-20
2303			4 × 1/4"-20
2307	Yes		4 × 1/4"-20
2715	Cover 230	11 and 2303	
2716	Cover for	2302	

Note: 2715 replaces 2706, 2716 replaces 2707







MaxiBus - 250A Common BusBars

Now with insert-molded stainless steel studs and optional fully enclosed insulating base and cover

- Insulating cover with breakouts for easy wire access
- Insulating cover meets ABYC insulation requirements
- One-piece serrated flange nuts ensure correct and secure connections

Continuous Rating 250A AC / 250A DC Voltage Max. Operating 300V AC / 48V DC Mounting Hardware #10 (M5) Screws

Bus Material Tin-Plated Copper C11000

Regulatory CE certified













2719 Related Products








DC Shunts


2718 Related Product




PowerBar 600A Common BusBar 2104 p. 100

PN	Terminal Studs	Terminal Screws	[A] Length in (mm)	[B] Mounting Centers in (mm)
2105	2 × 5/16" -18	12 × #10-24	7.75 (197.00)	7.125 (181.00)
2126	6 × 5/16" -18	-	7.75 (197.00)	7.125 (181.00)
2718	Cover for 2105 ar	nd 2126	8.78 (223.10)	5.41 (137.30)
2127	4 × 5/16" -18	-	5.875 (149.00)	5.25 (133.00)
2128	2 × 5/16" -18	6 × #10-24	5.875 (149.00)	5.25 (133.00)
2719	Cover for 2127 ar	nd 2128	6 70 (170 00)	4 10 (104 10)







2719 and 2718

PowerBar Common BusBars

Provides compact high-amp busing with 3/8" terminal studs





Continuous Rating up to 200A Voltage Max. Operating 48V DC

Mounting Holes Accepts #10 (M5) Screws
Bus Material Tin-Plated Copper C11000

Regulatory CE certified

PN	Terminal Studs	Insulators
2019	2 × 3/8" -16	Yes
2020	2 × 3/8" -16	





Terminal Blocks

Fully insulated independent terminal blocks to isolate circuits

- Each screw pair is one isolated circuit
- Terminal Block Jumpers allow creation of common circuits
- · Closed back design insulates power from the mounting surface


Bus Material Nickel-Plated Brass

Base Material High temp UL 94 VO thermoplastics


Regulatory

RoHS and UL Recognized


CE certified

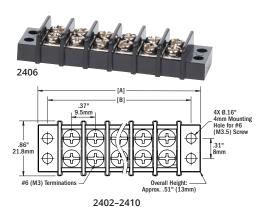



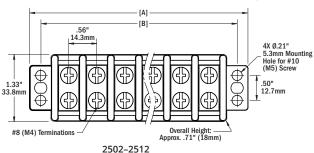



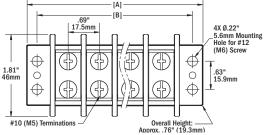

2602-2610

PN	Circuits	AC/DC Amps	AC/DC Volts	Terminal Screw	[A] Length in (mm)	[B] Mounting Centers in (mm)
2402	2	20A	300V	M3.5 (#6)	1.43 (36.20)	1.13 (28.70)
2404	4	20A	300V	M3.5 (#6)	2.17 (55.00)	1.87 (47.60)
2406	6	20A	300V	M3.5 (#6)	2.91 (74.00)	2.62 (66.60)
2408	8	20A	300V	M3.5 (#6)	3.66 (93.00)	3.37 (85.60)
2410	10	20A	300V	M3.5 (#6)	4.41 (112.00)	4.12 (104.60)
2502	2	30A	600V	M4 (#8)	2.13 (54.00)	1.69 (42.80)
2504	4	30A	600V	M4 (#8)	3.25 (82.60)	2.81 (71.40)
2506	6	30A	600V	M4 (#8)	4.38 (111.20)	3.94 (100.00)
2508	8	30A	600V	M4 (#8)	5.50 (139.70)	5.06 (128.50)
2510	10	30A	600V	M4 (#8)	6.63 (168.30)	6.18 (157.10)
2512	12	30A	600V	M4 (#8)	7.75 (196.80)	7.31 (185.60)
2602	2	65A	600V	M5 (#10)	2.51 (63.80)	2.06 (52.40)
2604	4	65A	600V	M5 (#10)	3.89 (98.70)	3.44 (87.30)
2606	6	65A	600V	M5 (#10)	5.26 (133.60)	4.81 (122.20)
2608	8	65A	600V	M5 (#10)	6.63(168.50)	6.19 (157.10)
2610	10	65A	600V	M5 (#10)	8.01 (203.40)	7.56 (192.00)

Terminal Block Jumpers

Combines independent circuits on Terminal Blocks (above) and ST-Blade Fuse Blocks 5035 and 5037

Bus Material Nickel-Plated Brass

Continuous Amperage Equivalent to matching block

PN	Description	Retail Pack
9218	For use with 20A Terminal Blocks	5
9217	For use with 30A Terminal Blocks and ST-Blade Fuse Blocks 5035 & 5037	5
9216	For use with 65A Terminal Blocks	5

Related Product



ST-Blade Fuse Blocks p. 60





Connector & Insulators Explained

Tin-plated copper buses provide maximum conductivity and corrosion resistance.

Insert-molded stainless steel studs eliminate the need for securing nuts and allow high torquing for excellent electrical contact.

UL 94-V0 rated UL 94-V0 rated base materials have flame retardants and will self extinguish if a flame source is removed.

Terminal Screws incorporate stainless steel split ring lock washers and captive star-type lock washers keep connections tight in high vibration environments.

One-Piece Serrated Flange Nuts ensure correct and secure connections which do not cause resistance.

Insulating covers meet ABYC and USCG insulation requirements.

PowerBar - 600A Common BusBars

High amperage BusBar with 3/8" terminal studs

Continuous Rating 545A AC / 600A DC

Voltage Max. Operating 300V AC / 48V DC

Mounting Hardware 2104 - #10 (M5) Screws

2107 - #10 (M5) Screws

Bus Material

Regulatory


CE certified


PN	Terminal Studs	Terminal Screws	[A] Length in (mm)	[B] Mounting Centers in (mm)
2104	4 × 3 / 8" -16	4 x #8-32	7.0 (177.8)	6.25 (158.74)
2107	8 × 3 / 8" -16	4 x #8-32	11.375 (288.93)	10.375 (263.53)
2708	Cover For 2104			

Tin-Plated Copper C11000





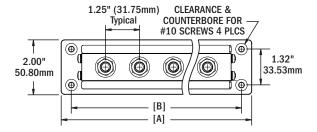





Related Products



MaxiBus Cover 2718

PowerBar 1000 - 1000A Common BusBar

Complex wiring systems require a single point to consolidate large and small conductors. The PowerBar 1000 offers a busbar with various size studs and screws to connect conductors and fuse blocks.

- For large complex wiring systems
- Tin-plated pure electrical copper for maximum conductivity
- Stepped bus design offers two elevations for conductors which doubles the density of the wire loom compared to traditional bus bars
- Busbar and fuse block elevations match common fuse blocks allowing for multiple fuse block attachment, eliminating the need for connecting cables
- One-piece serrated flange nuts ensure correct and secure connections
- Stainless steel 8-32 screws with captive lock washers for securing smaller gauge wires
- Busbar may be cut to a shorter length to accommodate constricted spaces
- Bi-directional busbar end caps allow the ganging of additional busbars
- Snap on insulating cover meets ABYC and USCG requirements and includes label recess
- Models available to accommodate either 3/8" or 5/16" terminals

Continuous Rating 1000A

Voltage Max. Operating 150V AC / 48V DC Mounting Hardware #10 (M5) Screws

Bus Material Tin-Plated Copper C11000

PN	Cover	Terminal Studs	Terminal Screws
1990	Yes	8 × 3/8"-16	5 x #10-32, 11 x #8-32
1991	Yes	12 × 3/8"-16	5 x #10-32, 11 x #8-32
1992	Yes	8 × 5/16"-18	5 x #10-32, 11 x #8-32
1993	Yes	12 × 5/16"-18	5 x #10-32, 11 x #8-32
2730B	PowerBar 1990 and 1992 Cover		
2731B	PowerBar 1991 and 1993 Cover		







Related Products



Terminal (MRBF) Fuse Block p.64



ANL Fuse Block p.65



Safety AMI/MIDI Fuse Block p.66



тесн tip...


PowerBar 1000 Explained

The PowerBar 1000 offers mounting and application flexibility. Coupled with security features like serrated flange nuts and an insulating cover, the PowerBar 1000 is an organized and secure termination point for the boat or vehicle's critical electrical connections.


PowerBar 1000 used as a grounding bus and high density collecting point for both large and small gauge conductors.



PowerBar 1000 used as a high amperage positive distribution bus for various types and sizes of fuses as well as high density collecting point for both large and small gauge conductors. Typically this configuration would include the snap on insulating cover but pictured without to better show fuse blocks.

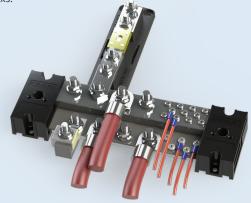

PowerBar 1000 used as a positive distribution bus and high density collecting point for both large and small gauge conductors. Pictured with snap on insulating cover.

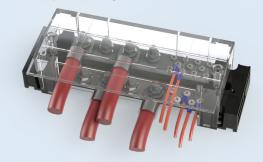

Gang two or more PowerBars together



Battery Terminal Mount BusBars

Easily add positive and negative busbars to the battery terminals

- Easily add positive and negative busbars directly to a threaded-post battery terminal
- Tin-plated pure electrical copper for maximum conductivity
- Insulating covers meet ABYC/USCG insulation requirements
- Screw terminals for securing wires
- 2340 Includes four 16-14 AWG and four 12-10 AWG Nylon Insulated ring terminals

Continuous Rating 100A DC Voltage Max. Operating 32V DC

Positive + Negative

Bus Material Tin-Plated Copper C11000

Mounting Thru-hole Clearance for 3/8" (M10) stud

Screw Terminal #8-32 Screws with Captive Star
Lock washer


Description	VIDE

2341B Positive2342B Negative

2340





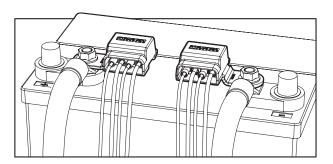

Related Products



ST-Blade Battery Terminal Mount Fuse Block Kit p. 59

PowerPost Cable Connectors

Insulated single stainless steel stud terminates multiple large conductors



One-piece serrated flange nuts ensure correct and secure connections

Continuous Rating Not rated—amperage flows between

terminals stacked on post and is determined by wire and terminals used.


Voltage Max. Operating 48V DC


Mounting Hardware #8 Screws (2010, 2011)

1 / 4" Screws (2001, 2002, 2003)

Regulatory CE certified

PN	Terminal Stud
2010	#10-32 × 5/8"
2011	1/4"-20 × 3/4"
2001	1/4"-20 × 1-1/16"
2002	5/16"-18 × 7/8"
2003	3/8"-16 × 7/8"





PowerPost Plus Cable Connectors

Enables connection of multiple smaller wires in spaces where a traditional bus bar may not fit



- 150 Amp bus allows small wire connections at high amperage cable connections
- One-piece serrated flange nut ensures correct and secure connections

Continuous Rating 150A DC

Voltage Max. Operating 48V DC

Mounting Hardware 1 / 4" Screws

Bus Material Tin-Plated Copper

Regulatory

CE certified

PN	Terminal Stud	Terminal Screws
2101	1/4"-20 × 1"	8 × #8-32
2102	5/16"-18 × 3/4"	8 × #8-32
2103	3/8"-16 × 3/4"	8 × #8-32

Dual PowerPost Cable Connectors

Provides a termination point for extending the length of outboard harnesses or other conductors

- Designed for connecting high amperage conductors
- 2018 is also designed for outboard engine installation when factory cables need to be extended

 One-piece serrated flange nuts ensure correct and secure connections

Continuous Rating Not rated—amperage


flows between terminals stacked on post and is determined by wire and terminals used.

Voltage Max. Operating 48V DC

Mounting Hardware #10 (M5) Screws



PN	Terminal Studs	Insulating Cover	Stud Height A in (mm)	Stud Height B in (mm)
2016	2 × 5/16"-18	Yes	1.50 (38.1)	1.50 (38.1)
2016100	2 × 5/16"-18		1.50 (38.1)	1.50 (38.1)
2017	2 × 3/8"-16	Yes	1.63 (41.3)	1.63 (41.3)
2017100	2 × 3/8"-16		1.63 (41.3)	1.63 (41.3)
2018	1 × 5/16"-18, 1 × 3/8"-16	Yes	1.50 (38.1)	1.63 (41.3)
2018100	1 × 5/16"-18, 1 × 3/8"-16		1.50 (38.1)	1.63 (41.3)



Terminal Feed Through Connectors


Eliminates chafe and provides strain relief when passing high current through hulls, decks and bulkheads


- Protects large cables that are subject to chafing when passed through holes
- The large terminals have a mounting face that can be gasketed or bedded to provide a water-tight installation
- One-piece serrated flange nut ensures correct and secure connections

Stud Material Tin-Plated Copper Alloy
Mounting Hardware #10 (M5) Screws

Regulatory

Rated IP66 - protected against powerful water jets



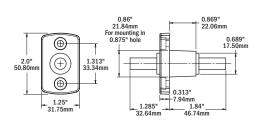





Connector Comparison

Product	Water-Resistant 100A BusBar	MiniBus 100A Common BusBars			Battery Terminal Mount BusBars	DualBus 100A Common BusBars		DualBus Plus 150A Common BusBars
	NEW .		THA	*****	999	2000	200000000000000000000000000000000000000	The Company of the Co
PN	2356	2304	2305	2306	2340	2701	2702	2722, 2723
Page Number	96		96		101	97		97
Continuous Rating	100A AC/100A DC		100A AC/100A DC		100A DC	100A AC/100A DC		130A AC / 150A DC
Max. Voltage	300V AC / 48V DC		300V AC / 48V DC		32V DC	300V AC / 48V DC		300V AC / 48V DC
Terminal Screw	4 × #8-32	5 × #8-32		6 × #8-32	4 per bus × #8-32	5 per bus × #8-32	10 per bus × #8-32	5 per bus × #8-32
Terminal Stud		2 × #10-32	4 × #10-32					2 per bus × 1/4"-20 or 2 per bus × 5/16"-18
Insulating Cover	Included	Cover a	vailable		Included	Cover	available	Included

Product	150A Common BusBars			MaxiBus 250A Common BusBars			
PN	2300 2312 2307		2120	Annonnal		111111	
PN	2300	2312	2307	2128	2105	2127	2126
Page Number		97		98			
Continuous Rating		130A AC / 150A DC		250A AC / 250A DC			
Max. Voltage		300V AC / 48V DC		300V AC / 48V DC			
Terminal Screw	10 × #8-32	20 × #8-32		6 × #10-24	12 × #10-24		
Terminal Stud	2 × 1/4"-20 4 × 1/4"-20		2 × 5/16" -18	2 × 5/16" -18	4 × 5/16" -18	6 × 5/16" -18	
Insulating Cover		Cover available		Cover available			

Product	PowerBar Common BusBar	Terminal Blocks			PowerB	ar 1000A	
		state state to				A A A A	
PN	2019	24XX	25XX	26XX	1992, 1993	1990, 1991	
Page Number	98		99		100		
Continuous Rating	Determined by wire up to 200A	20A AC / 20A DC	30A AC / 30A DC	65A AC / 65A DC	100	00A	
Max. Voltage	48V DC	300V AC / 300V DC	600V AC / 600V DC	600V AC / 600V DC	150V AC	/ 48V DC	
Terminal Screw		#6	#8	#10	5 x #10-24, 11 x #8-32	5 x #10-24, 11 x #8-32	
Terminal Stud	2 × 3/8"-16				8 x 5/16"-8 or 12 x 5/16"-8	8 x 3/8"-8 or 12 x 3/8"-8	
Insulating Cover	Included				Inclu	uded	


Product	PowerBar 600A Common BusBars		Terminal Feed Through Connectors	PowerPost Cable Connectors		PowerPost Plus Cable Connectors	Dual PowerPost Cable Connectors
	AAAA	AAAAAAA		*			
PN	2104	2107	2201-2204	2010-2011	2001-2003	2101-2103	2016-2018
Page Number		100	102	10	2	102	102
Continuous Rating	545A A	C / 600A DC	250A DC	Determined by wire and terminals		150A DC	Determined by wire and terminals
Max. Voltage	300V A	AC / 48V DC	48V DC	48V DC		48V DC	48V DC
Terminal Screw	4 :	× #8-32			-	8 × #8-32	
Terminal Stud	4 × 3/8"-16	8 × 3/8"-16	5/16"-18 or 3/8"-16	1 × #10-32 or 1 × 1/4"-20	1 × 1/4"-20 or 1 × 5/16"-18 or 1 × 3/8"-16	1 × 1/4"-20 or 1 × 5/16"-18 or 1 × 3/8"-16	2 × 5/16"-18 or 2 × 3/8"-16 or 1 × 5/16"-18 and 1 × 3/8"-16
Insulating Cover	Cover available			Inclu	ded	Included	Included

Stud Mount Insulating Boots NEW

Quickly and easily insulate conductive posts and studs

- Press-fit design works with all 5/16" (M8) and 3/8" (M10) posts and studs
- Ideal for ML-Series Remote Battery Switches, Solenoids & Automatic Charging Relays, battery terminals, power posts, bus bars, battery switches, and much more.
- · For use with insulated ring terminals and lugs only





PN	Cable Size (AWG)	Color	Package
4000	All	Red	Retail/2

Rotating CableCap Insulators

Insulates battery terminals which have integral wing nut posts

• Top rotates 360 degrees to allow cable entry from any angle



PN	Cable Size (AWG)	Color	Package
4001	All	Red/Black	Pair/Retail
9030B	All	Black	Bulk/Not for retail
9031B	All	Red	Bulk/Not for retail

Standard CableCap Insulators

Insulates battery terminals which have added adapter terminals




PN	Cable Size (AWG)	Color	Package
4005	4, 2, 1	Red/Black	Pair/Retail
4006	1/0, 2/0	Red/Black	Pair/Retail
9038B	4, 2, 1	Black	Bulk/Not for retail
9039B	4, 2, 1	Red	Bulk/Not for retail
9040B	1/0, 2/0	Black	Bulk/Not for retail
9041B	1/0, 2/0	Red	Bulk/Not for retail

Automotive CableCap Insulators

Insulates battery terminals which have standard automotive posts





PN	Cable Size (AWG)	Color	Package
4016	4, 2, 1	Red/Black	Pair/Retail
4017	1/0, 2/0	Red/Black	Pair/Retail
9176B	1/0, 2/0	Red	Bulk/Not for retail
9177B	1/0, 2/0	Black	Bulk/Not for retail

Square CableCap Insulators

Insulates battery terminals which have in-line dual posts



PN	Cable Size (AWG)	Color	Package
4018	1/0	Red/Black	Pair/Retail
4019B	1/0	Red	Bulk/Not for retail
4020B	1/0	Black	Bulk/Not for retail

Stud CableCap Insulators

Insulates single stud on alternators, starters, windlasses and high amperage termination points



PN	Cable Size (AWG)	Color	Package
4008	18-10	Red	Retail/3
4009	18-10	Black	Retail/3
4010	8-4	Red	Retail/2
4011	8-4	Black	Retail/2
4012	2-2/0	Red	Retail/1
4013	2-2/0	Black	Retail/1
4014	3/0-4/0	Red	Retail/1
4015	3/0-4/0	Black	Retail/1

PowerPost Insulator

Provides electrical insulation for single studs and large cables

• Included with 2001, 2002, 2003, 2101, 2102, 2103, and 2019



PN	Cable Size (AWG)	Color	Package
4004	6	Red	Retail

Dual Entry PowerPost Cable Insulators

Protects against accidental short circuits


• For use with Dual PowerPost Cable Connectors (p. 102)



PN	Cable Size (AWG)	Cable Entry Size in (mm)	Color	Package
4002	up to 2/0	0.7 (17.8)	Black	Retail/1
4003	up to 2/0	0.7 (17.8)	Red	Retail/1


CableClams


Provides a waterproof pass-through for antenna cables without requiring removal of the factory installed connector

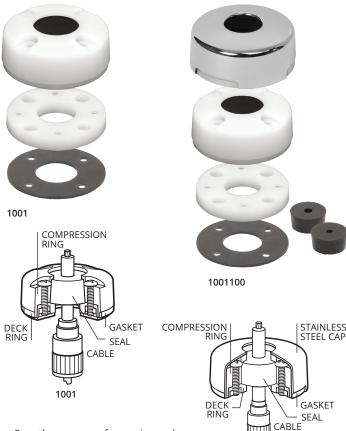


- Save the expense of removing and replacing connectors
- Avoid poor connections from removing factory connectors
- Use 1001, 1001100 for GPS cables, 1002, 1002100 for VHF cables, 1003, 1003100 for Radar cables
- 1001100, 1002100, 1003100 includes pre-drilled and slit rubber seals for easier installation
- 1001100, 1002100, 1003100 includes a 316 stainless steel dress cap which conceals mounting hardware and matches other deck hardware
- · Stainless steel fasteners included

Ring Material UV-Stabilized Thermoplastic Seal Material UV-Stabilized Buna-N Rubber







1001100

1001, 1001100


1002, 1002100

1003, 1003100

PN	Seals Included	Max. Connector Diameter in (mm)	Max. Cable Diameter in (mm)	Dress Cap	Mounting Holes Accept
1001		0.68 (17.0)	0.31 (8.0)		#6 x 7/8" screws
1001100	3	0.68 (17.0)	0.31 (8.0)	Yes	#6 x 7/8" screws
1002		0.83 (21.0)	0.44 (11.0)		#8 x 7/8" screws
1002100	3	0.83 (21.0)	0.44 (11.0)	Yes	#8 x 7/8" screws
1003		1.40 (35.0)	0.56 (14.0)		#8 x 7/8" screws
1003100	1	1.40 (35.0)	0.56 (14.0)	Yes	#8 x 7/8" screws

Side-Entry CableClams with Stainless Steel Dress Cap

Provides a water-resistant side-entry for cables without requiring removal of the factory installed connector

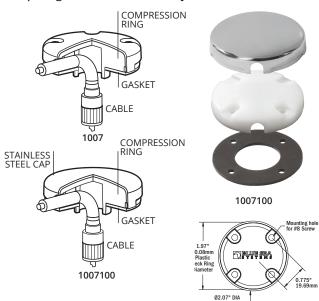

- Simple one-piece design for easy side-entry installations
- Low profile, contoured edge reduces the risk of tangling lines
- 1007100 includes a 316 stainless steel dress cap which conceals mounting hardware and matches other deck hardware
- Stainless steel fasteners included

Ring Material UV-Stabilized Thermoplastic
Gasket Material UV-Stabilized Buna-N Rubber

PN	Max. Connector Diameter in (mm)	Max. Cable Diameter in (mm)	Dress Cap	Mounting Holes Accept
1007	1.00 (25.40)	0.28 (7.112)		#8 x 7/8" screws
1007100	1.00 (25.40)	0.28 (7.112)	Yes	#8 x 7/8" screws



POWER DISTRIBUTION

Circuit Breaker Switch Water-Resistant



Designed for exposed mounting applications.

Contura Switch Water-Resistant





Complements existing controls commonly used on many boats.

WeatherDeck® Waterproof





Designed for open-cockpit and flybridge applications.

360 Panel System



Designed with an open frame to mount a broad selection of modules allowing multiple functions to be combined in a single panel.

Traditional Metal



Suited for use as drop-in replacements or extensions to existing panels.



POWER DISTRIBUTION

DC and AC **Circuit Breaker**





Designed to distribute current from a high amperage input into lower amperage circuits.

AC RCBO Circuit Breaker





Reduces the risk of fire and shock hazards caused by defects in boat appliances and circuit wiring.

AC Source Selection





Select between multiple AC sources to supply power to the AC Branch distribution system.

AC/DC Combination





Combines switching, circuit protection, source selection and monitoring into a single panel.

Custom 360





Design and order custom panels online.



The power distribution panel is the heart of an electrical system.

Blue Sea Systems manufactures panels suited for all size and distribution requirements of a vessel or vehicle.

Waterproof & Water-Resistant Panels

Integrated overcurrent protection and switching built to withstand harsh environments for every application.

Water-Resistant Circuit Breaker Switch Panels

Designed for Wet Environments - IP66

Water-Resistant Circuit Breaker Switch Panels utilize 15A illuminated circuit breakers that provide on indication and switching in one. Integrated switch boot and panel gasket provide IP66 water resistance for wet environments. Available in gray and camo pattern.







Contura Switch Water-Resistant Panels Contemporary Design For Wet Environments - IP66

Using industry standard Contura switches, the Blue Sea Systems Contura Switch Water Resistant Panels are designed to perform above deck, as well as complement any interior. Fuse models are available in a classic gray finish, and circuit breaker models are available in white or black.





WeatherDeck® Waterproof Panels Designed For Extreme Environments - IP67

The WeatherDeck Panels are Blue Sea Systems most waterproof panels and their contemporary appearance adds style to any boat. Available in switch only, fuse, and circuit breaker models, the WeatherDeck Panels can be mounted in four orientations for maximum versatility.







Water-Resistant Circuit Breaker Switch Panels

Designed for exposed mounting applications

- Illuminated 15A circuit breakers provide switching, ON indication and overcurrent protection
- Industry-standard sizes and mounting allow these panels to be easily retrofitted in an existing application
- Polycarbonate/ABS panel surface is UV-stabilized, flame retardant, and will not corrode
- Silicon breaker boots and gasket protects against water ingress
- Low profile makes it easy to install in tight spaces
- Fast-on circuit breaker connectors make it quick to wire
- Two-wire connection for powering all panels is simple and requires #10 ring terminals.
 Terminals screw to bus bars for secure connections
- Set of 15 square format circuit labels are included, and are easy to replace. Additional standard or custom labels are available through Blue Sea Systems

Nominal Voltage 12V DC Amperage Max. Operating 45A

Terminal Type 1/4" Male quick connect

Hardware Stainless Steel #6 x 5/8" mounting screws

Ring Terminal Size M5 (#10)

Regulatory

Panel front is IP66 when mounted with gasket in place - protected against powerful water jets (see inside back cover)

PN	Description	Color	Width in (mm)	Height in (mm)	Depth in (mm)	Width Mounting Centers in (mm)	Height Mounting Centers in (mm)
4320	4 positions	Gray	4.625 (117.47)	5.0 (127)	1.75 (44.45)	4.125 (104.77)	4.437 (112.69)
4321	4 pos. + 12 Volt Socket & Dual USB Charger	Gray	4.625 (117.47)	6.625 (168.27)	1.75 (44.45)	4.125 (104.77)	6.125 (155.57)
4322	6 positions	Gray	4.625 (117.47)	6.625 (168.27)	1.75 (44.45)	4.125 (104.77)	6.125 (155.57)
4323	4 positions	Camo	4.625 (117.47)	5.0 (127)	1.75 (44.45)	4.125 (104.77)	4.437 (112.69)
4324	4 pos. + 12 Volt Socket & Dual USB Charger	Camo	4.625 (117.47)	6.625 (168.27)	1.75 (44.45)	4.125 (104.77)	6.125 (155.57)
4325	6 positions	Camo	4.625 (117.47)	6.625 (168.27)	1.75 (44.45)	4.125 (104.77)	6.125 (155.57)







4323 Camo



4321 Gray



4324 Camo



4322 Gray



4325 Camo



Contura Switch Water-Resistant Panels

Designed for open-cockpit and flybridge applications using switches to complement existing controls commonly used on many boats

- Designed for 12 or 24V DC systems
- · Watertight mounting gasket
- ON indicating LEDs embedded in all switches
- Includes Small Format Label Set 8217 or 8214* (p. 152)

NOTE: Labels are not backlit

Voltage Max. Operating 24V DC

18 Milliamps each Amperage Operating Current Switch Rating 20A @ 12V DC 15A @ 24V DC

Circuit Breaker Rating

20A Max. (15A fuses included) Fuse Holder Rating Panel Cumulative Rating 45A (all except 8 position panels)

90A (8 position panels)

Regulatory

CE marked CIRCUIT BREAKER MODELS ONLY—Meet UL 1500 and ISO 8846 external ignition protection requirements

Panel front is IP66 when mounted with gasket in place - protected against powerful water jets (see inside back cover)





8274



8273



8271



8272

PN	Color	Push Button Circuit Breakers	AGC®/MDL® Fuse Holders	Width in (mm)	Height in (mm)	Depth in (mm)
8274	White	3		4.50 (114.30)	3.75 (95.25)	3.25 (82.55)
8272	White	4		5.25 (133.35)	4.25 (107.95)	3.25 (82.55)
8273	White	6		4.50 (114.30)	7.50 (190.50)	3.25 (82.55)
8271	White	8		9.37 (238.00)	4.25 (107.95)	3.25 (82.55)
8374	Black	3		4.50 (114.30)	3.75 (95.25)	3.25 (82.55)
8372	Black	4		5.25 (133.35)	4.25 (107.95)	3.25 (82.55)
8373	Black	6		4.50 (114.30)	7.50 (190.50)	3.25 (82.55)
8371	Black	8		9.37 (238.00)	4.25 (107.95)	3.25 (82.55)
8263†	Gray		1	2.25 (57.15)	3.75 (95.25)	3.00 (76.20)
8054*	Gray		3	5.25 (133.35)	3.75 (95.25)	3.00 (76.20)
8262	Gray		4	5.25 (133.35)	3.75 (95.25)	3.00 (76.20)
8053*	Gray		6	5.25 (133.35)	7.50 (190.50)	3.00 (76.20)
8261	Gray		8	9.37 (238.00)	3.75 (95.25)	3.00 (76.20)

^{* 8054} and 8053 include Large Format Label Set 8030 (p. 152)



8374





8371



8262



8261



8053*



8054*

8263[†] / Bilge Pump Control Panel

 $^{^{\}dagger}$ 8263 Bilge Pump Control Panel—(ON)-OFF-ON Contura Switch (p. 88)

WeatherDeck® Waterproof Panels

Designed for open-cockpit and flybridge applications

- Fuse Model: Bicolored LEDs illuminate circuit labels to quickly identify OFF (Red), ON (Green), or Blown (No color) circuits
- Circuit Breaker Model: Green LEDs illuminate circuit labels
- Fuse and Circuit Breaker Models:
 - Backlighting is compatible with DeckHand Dimmers (p. 23)
 - Independent label backlighting allows switching and dimming
- Switch Only Model: No circuit protection or illuminated circuit labels
- Integrated switch guards reduce the risk of accidental switching
- Panels can be mounted in four different orientations
- Panel front rated IP67 when properly mounted with watertight mounting gasket
- UV stabilized weather-resistant faceplate snaps on and off providing access to components and concealing mounting screws

24V DC

45A

15A

12V DC

15A Max.

1-30A

24V DC

15A @ 12V DC (per circuit)

9A @ 24V DC (per circuit)

10mA/Illuminated Circuit

10mA/Illuminated Circuit

15A @ 12V DC (per circuit)

10mA/Illuminated Circuit

15 Amps Maximum

12V or 24V DC

2 Position—30A 4 Position-60A 6 Position-90A 8 Position-100A

12V DC Nominal

15A @ 12V DC (per circuit)

• Square Format Label Set 4215 included (p. 152)

Circuit Breaker Panel

Voltage Max. Operating Amperage Max. Operating

Amperage Operating Current (backlight) Panel Cumulative Rating Switch Rating

Backlighting Voltage Backlighting Amperage Draw Circuit Breaker Rating

Fuse Panel

Voltage Max. Operating Amperage Max. Operating

Amperage Operating Current (backlight)

Panel Cumulative Rating

Switch Rating **Backlighting Voltage** Fuses Available

Switch Only Panel

Voltage Max. Operating

Amperage Max. Operating

Switch Rating 15A Max.

Regulatory

IP67 - protected against immersion up to 1 meter for 30 minutes (see inside back cover)



4374 CLB Circuit breakers



4376 CLB Circuit breakers



4378 CLB Circuit breakers

PN	Pos.	Circuit Breakers	Fuses	Label Backlight	Volts	Width in (mm)	Height in (mm)	Depth in (mm)	Width Mounting Centers in (mm)	Height Mounting Centers in (mm)
4374	4	Yes		Yes	12/24V	4.25 (107.95)	4.30 (109.22)	3.50 (88.90)	3.69 (93.73)	3.74 (95.00)
4376	6	Yes		Yes	12/24V	4.25 (107.95)	6.00 (152.40)	3.50 (88.90)	3.69 (93.73)	5.44 (138.18)
4378	8	Yes		Yes	12/24V	4.25 (107.95)	7.70 (195.58)	3.50 (88.90)	3.69 (93.73)	7.14 (181.36)
4302	2		Yes	Yes	12V	3.88 (98.55)	2.60 (66.04)	2.50 (63.50)	3.31 (84.07)	2.04 (51.82)
4304	4		Yes	Yes	12V	3.88 (98.55)	4.30 (109.22)	2.50 (63.50)	3.31 (84.07)	3.74 (95.00)
4306	6		Yes	Yes	12V	3.88 (98.55)	6.00 (152.40)	2.50 (63.50)	3.31 (84.07)	5.44 (138.18)
4308	8		Yes	Yes	12V	3.88 (98.55)	7.70 (195.58)	2.50 (63.50)	3.31 (84.07)	7.14 (181.36)
4303	2				12/24V	3.88 (98.55)	2.60 (66.04)	2.50 (63.50)	3.31 (84.07)	2.04 (51.82)
4305	4				12/24V	3.88 (98.55)	4.30 (109.22)	2.50 (63.50)	3.31 (84.07)	3.74 (95.00)
4307	6				12/24V	3.88 (98.55)	6.00 (152.40)	2.50 (63.50)	3.31 (84.07)	5.44 (138.18)
4309	8				12/24V	3.88 (98.55)	7.70 (195.58)	2.50 (63.50)	3.31 (84.07)	7.14 (181.36)



4302 ATO/ATC Fuses 4303 Switch only, no backlight or fuses



4304 ATO/ATC Fuses 4305 Switch only, no backlight or fuses



4306 ATO/ATC Fuses 4307 Switch only, no backlight or fuses



4308 ATO/ATC Fuses 4309 Switch only, no backlight or fuses

360 Panel System



The 360 Panel System uses an open frame to mount a broad selection of modules allowing multiple functions to be combined in a single panel. This innovative design offers a wide choice of panel features, accommodates future changes, and permits rapid assembly and shipping time. With options ranging from battery management to source selection, the 360 Panel System provides unmatched design flexibility. If you do not find the panel you are looking for in the stock panel offering, please go to page 128 to find out how to create and order a custom panel that will work for your specific application.

Sabre Yachts uses Blue Sea Systems 360 Panels aboard their boats including the 42 Salon Express





Open frame allows future replacement or upgrade of panel modules

Related Products



Push Button Circuit Breaker Boot p. 71



Reset-Only Circuit Breaker



A-Series Rocker Circuit Breakers p. 78



ELCI Main Circuit Breakers p. 83



Analog Meters p. 136



Digital Meters p. 142



360 Panel Insulating Back Cover p. 150



Square Format Labels p. 152


Traditional Metal Panels



Styled to Match Existing Panels

The Traditional Metal Panels are suited for use as extensions to existing panels or as full replacements. All panels are pre-wired and include LEDs in all positions. Choose from over 100 stock panels ranging from simple circuit breaker models to complex multi-source AC configurations.





Marine grade aluminum frame securely holds fixed panel components and is chemically treated to resist corrosion (aluminum frame not sold separately)

Related Products



A-Series Toggle Circuit Breakers p. 78



C-Series Toggle Circuit Breaker p. 80



ELCI Main Circuit Breakers p. 83



Digital Meters p. 142



Analog Meters p. 136



LED Indicator Lights p. 151



Insulating Back Cover p. 151



Large Format Labels p. 152



DC Branch Circuit Breaker Panels

Distribute current from a high amperage input into lower amperage circuits

Features

- ON-indicating LEDs for select models[†]
- Backlit label positions for select models[†]
- Panels with voltmeters include a toggle switch to monitor voltage on up to three battery banks
- [†] Panels with Push Button Circuit Breakers do not include ON-indicating LEDs or backlit label positions

Component References

- A-Series Circuit Breakers (p. 78)
- Push Button Reset-Only Circuit Breakers (p. 71)
- ON-OFF, SPST Rocker Switches (p. 90)
- 360 Panels include 4205 label set (p. 153)
- Traditional Metal Panels include 8030 label set (p. 152)
- DC Digital Multimeter (p. 142)
- DC Analog Meters (p. 136)
- Amber ON-indicating LEDs (p. 151)











	A SUM SEA DISTURS				CHON BATISTIS
	8025	1216	1455	1459	8081
Style	Traditional Metal	360 Panel System	360 Panel System	360 Panel System	Traditional Metal
Total Positions	3 Positions	4 Positions	4 Positions	4 Positions	5 Positions
Circuit Breakers	3 A-Series, 15A (7210)	4 A-Series, 15A (7403)	4 Push Button, 10A (7054)	4 Push Button, 10A (7054)	5 A-Series, 15A (7210)
Rocker Switches			4 ON-OFF, SPST (7480)	4 ON-OFF, SPST (7480)	
Nominal Voltage	12/24V DC	12V DC	12V DC	12V DC	12V DC
Maximum Amperage	100A	100A	40A	40A	50A
DC Meter				8-16V (8003)	8-16V (8028) , 0-50A (8041)
Width x Height in (mm)	5.25 (133.35) x 4.75 (120.65)	4.88 (123.83) x 4.75 (120.65)	4.88 (123.83) x 4.75 (120.65)	4.88 (123.83) x 7.75 (196.85)	5.25 (133.35) x 7.50 (190.50)
Depth in (mm)	2.50 (63.50)	3.00 (76.20)	3.50 (88.90)	3.50 (88.90)	2.50 (63.50)











	8401	8096	1450	1457	1456
Style	Traditional Metal	Traditional Metal	360 Panel System	360 Panel System	360 Panel System
Total Positions	5 Positions	6 Positions	8 Positions	8 Positions	8 Positions
Circuit Breakers	5 A-Series, 15A (7210)	6 A-Series, 15A (7210)	8 Push Button, 15A (7056)	8 Push Button, 10A (7054)	8 Push Button, 10A (7054)
Rocker Switches	-	-	-	8 ON-OFF, SPST (7480)	8 ON-OFF, SPST (7480)
Nominal Voltage	12/24V DC	12/24V DC	12/24V DC	12V DC	12V DC
Maximum Amperage	100A	100A per bus	90A	80A	80A
DC Meter	Digital Multimeter (8248)				
Width x Height in (mm)	5.25 (133.35) x 7.50 (190.50)	10.50 (266.70) x 3.75 (95.25)	4.88 (123.83) x 4.75 (120.65)	4.88 (123.83) x 7.75 (196.85)	9.25 (234.95) x 4.75 (120.65)
Depth in (mm)	4.00 (101.6)	2.50 (63.50)	3.50 (88.90)	3.50 (88.90)	3.50 (88.90)











	1200	1225	8023	8385	1463
Style	360 Panel System	360 Panel System	Traditional Metal	Traditional Metal	360 Panel System
Total Positions	8 Positions	8 Positions	8 Positions	8 Positions	8 Positions
Circuit Breakers	8 A-Series, 15A (7403)	8 A-Series, 15A (7403)	5 A-Series, 15A (7210)	6 A-Series, 15A (7210)	8 Push Button, 10A (7054)
Rocker Switches					8 ON-OFF, SPST (7480)
Nominal Voltage	12V DC	12V DC	12/24V DC	12/24V DC	12V DC
Maximum Amperage	100A	100A per bus	100A	100A per bus	80A
Meter (PN)					8-16V (8003)
Width x Height in (mm)	4.88 (123.83) x 7.75 (196.85)	9.25 (234.95) x 4.75 (120.65)	5.25 (133.35) x 7.50 (190.50)	10.50 (266.70) x 4.50 (114.30)	4.88 (123.83) x 10.75 (273.05)
Depth in (mm)	3.00 (76.20)	3.00 (76.20)	2.50 (63.50)	2.50 (63.50)	3.50 (88.90)













	1227	8082	8402	1461	1464
Style	360 Panel System	Traditional Metal	Traditional Metal	360 Panel System	360 Panel System
Total Positions	8 Positions	10 Positions	10 Positions	12 Positions	12 Positions
Circuit Breakers	8 A-Series, 15A (7403)	7 A-Series, 15A (7210)	7 A-Series, 15A (7210)	12 Push Button, 10A (7054)	12 Push Button, 10A (7054)
Rocker Switches				12 ON-OFF, SPST (7480)	12 ON-OFF, SPST (7480)
Nominal Voltage	12V DC	12V DC	12/24V DC	12V DC	12V DC
Maximum Amperage	100A	50A	100A	120A	120A
Meter	Digital Multimeter (8248)	8-16V (8028) / 0-50A (8041)	Digital Multimeter (8248)		8-16V (8003)
Width X Height in (mm)	4.88 (123.83) x 7.75 (196.85)	5.25 (133.35) x 11.25 (285.75)	5.25 (133.35) x 11.25 (285.75)	4.88 (123.83) x 10.75 (273.05)	9.25 (234.95) x 7.75 (196.85)
Depth in (mm)	3.00 (76.20)	2.50 (63.50)	4.00 (101.6)	3.50 (88.90)	3.50 (88.90)









	1223	1217	8375	8376
Style	360 Panel System	360 Panel System	Traditional Metal	Traditional Metal
Total Positions	12 Positions	12 Positions	12 Positions	13 Positions
Circuit Breakers	12 A-Series, 15A (7403)	12 A-Series, 15A (7403)	10 A-Series, 15A (7210)	10 A-Series, 15A (7210)
Rocker Switches				
Nominal Voltage	12V DC	12V DC	12/24V DC	12/24V DC
Maximum Amperage	100A	100A per bus	100A per bus	100A
DC Meter		Digital Multimeter (8248)		
Width x Height in (mm)	4.88 (123.83) x 10.75 (273.05)	9.25 (234.95) x 7.75 (196.85)	14.75 (374.65) x 4.50 (114.30)	5.25 (133.35) x 11.25 (285.75)
Depth in (mm)	3.00 (76.20)	4.00 (101.60)	2.50 (63.50)	2.50 (63.50)





	KRINESIA SISTEMS	ERIO SIA DITIMI
	8068	8403
Style	Traditional Metal	Traditional Metal
Total Positions	13 Positions	13 Positions
Circuit Breakers	10 A-Series, 15A (7210)	10 A-Series, 15A (7210)
Nominal Voltage	12V DC	12/24V DC
Maximum Amperage	50A	100A per bus
DC Meter	8-16V (8028), 0-50A (8041)	Digital Multimeter (8248)
Width x Height in (mm)	10.50 (266.70) x 7.50 (190.50)	10.50 (266.70) x 7.50 (190.50)
Depth in (mm)	3.00 (76.20)	4.00 (101.6)

 $^{^{\}dagger}$ Without ON-indicating LEDs or backlit label positions



DC Branch Circuit Breaker Panels







	1222	8377	1201
Style	360 Panel System	Traditional Metal	360 Panel System
Total Positions	16 Positions	16 Positions	16 Positions
Circuit Breakers	16 A-Series, 15A (7403)	10 A-Series, 15A (7210)	16 A-Series, 15A (7403)
Nominal Voltage	12V DC	12/24V DC	12V DC
Maximum Amperage	100A per bus	100A per bus	50A
DC Meter			8-16V (8003), 0-50A (8022)
Width in (mm)	9.25 (234.95)	10.50 (266.70)	13.63 (346.08)
Height in (mm)	7.75 (196.85)	7.50 (190.50)	7.75 (196.85)
Depth in (mm)	3.00 (76.20)	2.50 (63.50)	3.00 (76.20)







		· · · · · · · · · · · · · · · · · · ·	
	8378	1221	8379
Style	Traditional Metal	360 Panel System	Traditional Metal
Total Positions	18 Positions	Main + 19 Positions	Main + 20 Positions
Circuit Breakers	15 A-Series, 15A (7210)	1 C-Series, 100A (7549) , 19 A-Series, 15A (7403)	1 C-Series, 100A (7250I) , 14 A-Series, 15A (7210)
Nominal Voltage	12V DC	12V DC	12/24V DC
Maximum Amperage	100A	100A	100A
DC Meter	8-16V (8003) / 0-100A (8017)	Digital Multimeter (8248)	Digital Multimeter (8248)
Width in (mm)	14.75 (374.65)	13.63 (346.08)	14.75 (374.65)
Height in (mm)	7.50 (190.50)	7.75 (196.85)	7.50 (190.50)
Depth in (mm)	2.50 (63.50)	4.00 (101.60)	4.00 (101.6)





	8380	8264
Style	Traditional Metal	Traditional Metal
Total Positions	Main + 22 Positions	24 Positions
Circuit Breakers	1 C-Series, 100A (7250I) , 16 A-Series, 15A (7210)	15 A-Series, 15A (7210)
Nominal Voltage	12V DC	12/24V DC
Maximum Amperage	100A	100A per bus
DC Meter	8-16V (8028) / 0-100A Micro	
Width in (mm)	10.50 (266.70)	14.75 (374.65)
Height in (mm)	11.25 (285.75)	7.50 (190.50)
Depth in (mm)	3.00 (76.20)	2.50 (63.50)





	8381	8382
Style	Traditional Metal	Traditional Metal
Total Positions	Main + 32 Positions	Main + 35 Positions
Circuit Breakers	1 C-Series, 100A (7250I) , 23 A-Series, 15A (7210)	1 C-Series, 100A (7250I) , 26 A-Series, 15A (7210)
Nominal Voltage	12V DC	12/24V DC
Maximum Amperage	100A	100A
DC Meter	8-16V (8003) / 0-100A (8017)	Digital Multimeter (8248)
Width in (mm)	14.75 (374.65)	14.75 (374.65)
Height in (mm)	11.25 (285.75)	11.25 (285.75)
Depth in (mm)	3.00 (76.20)	4.00 (101.6)





AC Branch Circuit Breaker Panels

Distributes current from high amperage inputs into lower amperage circuits

Features

- On indicating LEDs in all circuit positions
- · Backlit label positions

Component References

- A-Series Circuit Breakers (p. 78)
- AC Analog Meters (p. 136)
- 360 Panels include 4206 label set (p. 153)
- Traditional Metal Panels include 8031 label set (p. 152)
- Green ON-indicating LEDs (p. 151)







	8058	8158	1210	1211	8097	8197		
Style	Tradition	nal Metal	360 Pane	l System	Traditional Metal			
Total Positions	3 Pos	itions	4 Pos	itions	6 Positions			
Circuit Breakers	3 A-Series, 15A (7210)	3 A-Series, 8A (7299)	4 A-Series, 15A (7403)	4 A-Series, 8A (7401)	6 A-Series, 15A (7210)	6 A-Series, 8A (7299)		
Nominal Voltage	120V AC	20V AC 230V AC	120V AC	230V AC	120V AC	230V AC		
Maximum Amperage	10	100A		0A	100A per bus			
Actuator Style	White	Toggle	Flat R	Flat Rocker 1331 sold separately (150)		White Toggle		
Insulating Back Cover	4026 sold sep	arately (p. 151)	1331 sold sep					
Width x Height in (mm)	5.25 (133.35) x 3.75 (95.25) 2.50 (63.50)		4.88 (123.83)	(4.75 (120.65)	10.50 (266.70) x 3.75 (95.25) 2.50 (63.50)			
Depth in (mm)			3.00 (76.20)				





	1228	1229	8059	8159			
Style	360 Pane	el System	Tradition	al Metal			
Total Positions	8 Pos	itions	8 Posi	8 Positions			
Circuit Breakers	8 A-Series, 15A (7403)	8 A-Series, 8A (7401)	5 A-Series, 15A (7210)	5 A-Series, 8A (7299)			
Nominal Voltage	120V AC	230V AC	120V AC	230V AC			
Maximum Amperage	10	00A	100A				
Actuator Style	Flat R	Rocker	White Toggle				
Insulating Back Cover	2 × 1331 sold se	eparately (p. 150)	4027 sold separately (p. 151)				
Width x Height in (mm)	4.88 (123.83)	x 7.75 (196.85)	5.25 (133.35) x 7.50 (190.50)				
Depth in (mm)	3.00 (76.20)	2.50 (63.50)				







RELIGIOS STATES			N DELTE S	CA SYSTEM	A DOLE DEA TESTEND			
	8411	8511	8478	8578	8480	8580		
Style	Traditio	nal Metal	Tradition	al Metal	Traditional Metal			
Total Positions	8 Pos	itions	10 Positions		13 Positions			
Circuit Breakers	6 A-Series, 15A (7210)	6 A-Series, 8A (7299)	7 A-Series, 15A (7210)	7 A-Series, 8A (7299)	10 A-Series, 15A (7210)	10 A-Series, 8A (7299)		
Nominal Voltage	120V AC	230V AC	120V AC	230V AC	120V AC	230V AC		
Maximum Amperage	100A per bus		10	0A	100A			
Actuator Style	White	Toggle	White '	White Toggle		White Toggle		
Meter (PN)			0-150V (9353)	0-250V (9354)		-		
Insulating Back Cover	 10.50 (266.70) x 4.50 (114.30)		_	-				
Width x Height in (mm)			5.25 (133.35) x	11.25 (285.75)	5.25 (133.35) x 11.25 (285.75)			
Depth in (mm)	2.50	(63.50)	2.50 (6	53.50)	2.50 (63.50)			







					*				DISTRIBUTION	8					6
8	1	•		CONDITIONES	6		•		100 VOIT AC OUTLETS	8		•		HCT MATER PLANS	
	1	3		APPLIANCES			•		BATTERY CHARGER	8				VACLUM	
	1	8		BURGURADOR	•		0		CABN LICHTS			8		TRASH COMMACTOR	
	1	8	۰	TWSTEREO	*			۰	COMMERTER		1		۰	SPARE	
	1	•		WASHELDENER					DISHWASHER			•		SHARE	
		8			•	0	0					8			
8		9			8	0	0					0			
0		8				0			-	6					
8			۰	•	8			S ISA I		Œ			*	•	e

	8479	8579	8461	8561	8265	8165		
Style	Tradition	nal Metal	Tradition	nal Metal	Traditional Metal			
Total Positions	13 Pos	itions	16 Positions		24 Positions			
Circuit Breakers	10 A-Series, 15A (7210)	10 A-Series, 8A (7299)	10 A-Series, 15A (7210)	10 A-Series, 8A (7299)	15 A-Series, 15A (7210)	15 A-Series, 8A (7299)		
Nominal Voltage	120V AC	230V AC	120V AC	230V AC	120V AC	230V AC		
Maximum Amperage	Amperage 100A per bus	100A p	er bus	100A per bus				
AC Meter	0-150V (9353)	0-250V (9354)	_					
Actuator Style	White '	Toggle	White	Toggle	White Toggle 			
Insulating Back Cover	-	-	_	-				
Width in (mm)			10.50 (266.70) >	7.50 (190.50)	14.75 (374.64) x 7.50 (190.50)			
Depth in (mm)			2.50 (63.50)		2.50 (63.50)			





AC Main Circuit Breaker Panels

Provides a path for delivering power from the AC source to the AC branch distribution system

Features

- Red reverse polarity indication LED
- · Green ON indicating LEDs
- · Backlit label positions

Component References

- A-Series Circuit Breakers (p. 78)
- AC Analog Meters (p. 136)
- AC Digital Multimeter (p. 142)
- Red reverse polarity indication LED (p. 151)
- Green ON indicating LEDs (p. 151)
- Traditional Metal Panels include 8031 label set (p. 152)
- 360 Panels include 4206 label set (p. 153)
- Source selection label set included with panels 8077, 8177, 8079, and 8179 (p. 153)

See page 82 for a discussion of ABYC ELCI recommendations for AC Main circuit protection.









	8077	8177	8079	8179	8029	8129	1214	1215	
Style	Traditional Metal		Tradition	Traditional Metal		nal Metal	360 Panel System		
Total Positions	Main Only		Main Only		Main + 1 position		Main + 2 positions		
A-Series Circuit Breakers	Main, 30A (7238)	Main, 16A (7294)	Main, 50A (7242)	Main, 32A (7295)	Main, 30A (7238)	Main, 16A (7294)	Main, 30A (7414) 2 Branch, 15A (7403)	Main, 16A (7412) 2 Branch, 8A (7401)	
Nominal Voltage	120V AC	230V AC	120V AC 230V AC	120V AC	230V AC	120V AC	230V AC		
Actuator Style	White	Toggle	White	Toggle	White	White Toggle		Flat Rocker	
Insulating Back Cover					4026 sold sep	4026 sold separately (p. 151)		1331 sold separately (p. 150)	
Width x Height in (mm)			2.63 (66.80) x 3.75 (95.25)		5.25 (133.35) x 3.75 (95.25)		4.88 (123.83) x 4.75 (120.65)		
Depth in (mm)			2.50 (63.50)		2.50 (63.50)	3.00 (76.20)		









			K HULE SEA STYTEMS		T HILLS	EA SYSTEMS	K MUSE SEA SESTEMS		
	1206	1207	8043	8143	8409	8509	8405	8505	
Style	360 Pane	360 Panel System		Traditional Metal		Traditional Metal		Traditional Metal	
Total Positions	Main + 2	Main + 2 positions		Main + 3 positions		Main + 3 positions		Main + 3 positions	
A-Series Circuit Breakers	Main, 30A (7414) 2 Branch, 15A (7403)	Main, 16A (7412) 2 Branch, 8A (7401)	Main, 30A (7238) 3 Branch, 15A (7210)	Main, 16A (7294) 3 Branch, 8A (7299)	Main, 30A (7238) 3 Branch, 15A (7210)	Main, 16A (7294) 3 Branch, 8A (7299)	Main, 30A (7238) 3 Branch, 15A (7210)	Main, 16A (7294) 3 Branch, 8A (7299)	
Nominal Voltage	120V AC	230V AC	120V AC	230V AC	120V AC	230V AC	120V AC	230V AC	
Actuator Style	Flat R	ocker	White Toggle		White Toggle		White Toggle		
AC Meter	ulating Back Cover 2 × 1331 sold separately (p. 150) dth x Height in (mm) 4.88 (123.83) x 7.75 (196.85)		0-150V (9353)	0-250V (8245)	0-150V (8244) 0-50A (8246)	0-250V (8245) 0-50A (8246)	Digital Multi	meter (8247)	
Insulating Back Cover			4027 sold sep	arately (p. 151)	4027 sold separately (p. 151)		4027 sold separately (p. 151)		
Width x Height in (mm)			5.25 (133.35) x 7.50 (190.50)		5.25 (133.35) x 7.50 (190.50)		5.25 (133.35) x 7.50 (190.50)		
Depth in (mm)			2.50 (63.50)		3.00 (76.20)		4.00 (101.60)		







1007 AC		• . •	•==	
		•		
	2000 2000 2000	• [•	• 5000	
A3839461E				
1230			233	

	8099	8199	8027
Style	Traditio	Trac	
Total Positions	Main + 4	Main	
A-Series Circuit Breakers	Main, 30A (7238) 4 Branch, 15A (7210)	Main, 16A (7294) 4 Branch, 8A (7299)	Main, 30A (7 3 Branch, 1 (7210)
Nominal Voltage	120V AC	230V AC	120V AC
Actuator Style	White	Toggle	V
Insulating Back Cover		-	4027 sol
Width x Height in (mm)	10.50 (266.70)	5.25 (133	
Depth in (mm)	2.50 (

Traditional Metal	0027	0127						
Main, 30A (7238) 3 Branch, 15A (7210) 120V AC White Toggle 4027 sold separately (p. 151) 5.25 (133.35) × 7.50 (190.50)	Traditional Metal							
3 Branch, 15A (7219) 120V AC 230V AC White Toggle 4027 sold separately (p. 151) 5.25 (133.35) x 7.50 (190.50)	Main + 6	positions						
White Toggle 4027 sold separately (p. 151) 5.25 (133.35) x 7.50 (190.50)	3 Branch, 15A	3 Branch, 8A						
4027 sold separately (p. 151) 5.25 (133.35) x 7.50 (190.50)	120V AC	230V AC						
5.25 (133.35) x 7.50 (190.50)	White Toggle							
	4027 sold separately (p. 151)							
2.50 (63.50)	5.25 (133.35) x 7.50 (190.50)							
, ,	2.50 (63.50)						

	8412	8512				
	Tradition	al Metal				
	Main + 6	positions				
)	Main, 30A (7238) 4 Branch, 15A (7210)	Main, 16A (7294) 4 Branch, 8A (7299)				
120V AC 230V AC						
	White Toggle					
	10.50 (266.70) x 4.50 (114.30)					
	2.50 (6	53.50)				

360 Panel System						
Main + 6	positions					
Main, 30A (7414) 6 Branch, 15A (7403)	Main, 16A (7412 6 Branch, 8A (7401)					
120V AC	230V AC					
Flat R	ocker					
2 x 1331 sold separately (p. 150)						
9.25 (234.95) x 4.75 (120.65)						
3.00 (76.20)					









	1202	1203	8074	8174	8488	8588	8406	8506
Style	360 Pane	l System	Traditional Metal		Tradition	nal Metal	Traditional Metal	
Total Positions	Main + 6	positions	Main + 8	oositions	Main + 8 positions		Main + 8 positions	
A-Series Circuit Breakers	Main, 30A (7414) 6 Branch, 15A (7403)	Main, 16A (7412) 6 Branch, 8A (7401)	Main, 30A (7238) 5 Branch, 15A (7210)	Main, 16A (7294) 5 Branch, 8A (7299)	Main, 30A (7238) 5 Branch, 15A (7210)	Main, 16A (7294) 5 Branch, 8A (7299)	Main, 30A (7238) 5 Branch, 15A (7210)	Main, 16A (7294) 5 Branch, 8A (7299)
Nominal Voltage	120V AC	230V AC						
Actuator Style	Flat R	ocker	White 7	Гoggle	White Toggle		White Toggle	
AC Meter	-	-	0-150V (8244) 0-50A (8246)	0-250V (8245) 0-50A (8246)	0-150V (9353) 0-250V (9354)		Digital Multimeter (8247)	
Insulating Back Cover	2 × 1331 sold se	parately (p. 150)						
Width x Height in (mm)	4.88 (123.83) >	7.75 (196.85)	5.25 (133.35) x 11.25 (285.75)		5.25 (133.35) x 11.25 (285.75)		5.25 (133.35) x 11.25 (285.75)	
Depth in (mm)	3.00 (7	76.20)	3.00 (7	76.20)	2.50 (63.50)	4.00 (101.60)	







	8485	8585	8076	8176	8407	8507	
Style	Tradition	al Metal	Traditio	nal Metal	Traditional Metal		
Total Positions	Main + 11 positions		Main + 11 positions		Main + 11 positions		
A-Series Circuit Breakers	Main, 30A (7238) 8 Branch, 15A (7210)	Main, 16A (7294) 8 Branch, 8A (7299)	Main, 30A (7238) 8 Branch, 15A (7210)	Main, 16A (7294) 8 Branch, 8A (7299)	Main, 30A (7238) 8 Branch, 15A (7210)	Main, 16A (7294) 8 - Branch, 8A (7299)	
Nominal Voltage	120V AC	230V AC	120V AC	230V AC	120V AC	230V AC	
Actuator Style	White 1	Гoggle	White Toggle		White Toggle		
AC Meter				0-250V (8245) 0-50A (8246)	Digital Multi	meter (8247)	
Insulating Back Cover			<u></u>				
Width x Height in (mm)	5.25 (133.35) x	11.25 (285.75)	10.50 (266.70)	10.50 (266.70) x 7.50 (190.50)		x 7.50 (190.50)	
Depth in (mm)	2.50 (6	3.50)	3.00	(76.20)	4.00 (101.60)		





	8464	8564	8465	8565	
Style	Tradition	nal Metal	Traditional Metal		
Total Positions	Main + 14	positions	Main + 22 positions		
A-Series Circuit Breakers	Main, 30A (7238) 8 Branch, 15A (7210)	Main, 16A (7294) 8 Branch, 8A (7299)	Main, 30A (7238) 13 Branch, 15A (7210)	Main, 16A (7294) 13 Branch, 8A (7299)	
Nominal Voltage	120V AC	230V AC	120V AC	230V AC	
Actuator Style	White	Toggle	White Toggle		
Insulating Back Cover	-	-	-	-	
Width x Height in (mm)	10.50 (266.70)	x 7.50 (190.50)	14.75 (374.65) x 7.50 (190.50)		
Depth in (mm)	2.50 (63.50)	2.50 (63.50)		

AC Residual Current Circuit Breaker Panels

Reduces the risk of fire and shock hazards caused by defects in appliances and circuit wiring

Features

• Provides Main circuit protection with branch circuits

Component References

- ELCI Main Circuit Breakers (p. 83)
- A-Series Circuit Breakers (p. 78)
- AC Analog Meters (p. 136)

See page 82 for a discussion of ABYC ELCI recommendations for AC Main circuit protection.









		E BLUE SEA SYSTEMS		E BLUE SEA DYSTEPS
	1502	8100	1190	8101
Style	360 Panel System	Traditional Metal	360 Panel System	Traditional Metal
Total Positions	ELCI + 1 Position	ELCI	ELCI + 1 position	ELCI + 5 positions
GFCI/ELCI Circuit Breaker	1 - ELCI Main, 30A (3102)	1 - ELCI Main, 30A (3106)	1 - ELCI Main, 30A (3102)	1 - ELCI Main, 30A (3106)
A-Series Circuit Breaker			1 - Branch, 15A AC (7403)	2 - Branch, 15A (7210)
Amperage Trip Reference	30A	30A	30A	30A
Leakage Trip Amperage	30mA	30mA	30mA	30mA
Maximum Voltage	120V	120V	120V	120V
Actuator Style	Flat Rocker	White Toggle	Flat Rocker	White Toggle
Insulating Panel Back	1331 sold separately (p. 150)		1331 sold separately (p. 150)	
Width x Height in (mm)	4.88 (123.83) x 4.75 (120.65)	5.25 (133.35) x 3.75 (95.25)	4.88 (123.83) x 4.75 (120.65)	5.25 (133.35) x 7.50 (190.50)
Depth in (mm)	3.99 (101.4)	3.50 (88.90)	3.99 (101.4)	3.50 (88.90)

AC 120/240 Volt (60Hz) **Circuit Breaker Panels**


Provides circuit protection for 240V AC systems

- 1168 Provides 1 spare rocker aperture
- C-Series Circuit Breakers (p. 80)











	7372	1168
Style	Traditional Metal	360 Panel System
Total Positions	Main Only	Main + 1 position
C-Series Circuit Breaker	1 Main, 50A (7287)	1 Main, 50A (7565)
Poles	3	3
Nominal Voltage	120/240V	120/240V
Maximum Voltage	240V AC	240V AC
Actuator Style	White Toggle	Flat Rocker
Width in (mm)	5.25 (133.35)	4.88 (123.83)
Height in (mm)	3.75 (95.25)	4.75 (120.65)
Depth in (mm)	3.00 (76.20)	3.00 (76.20)

	8102	1193
Style	Traditional Metal	360 Panel System
Total Positions	ELCI + 2 positions	ELCI + 5 positions
ELCI Circuit Breaker	1 - ELCI Main, 30A AC (3106)	1 - ELCI Main, 30A AC (3102)
A-Series Circuit Breaker	2 - Branch, 15A AC (7210)	4 - Branch, 15A AC (7403)
Amperage Trip Reference	30A AC	30A AC
Leakage Trip Amperage	30mA	30mA
Maximum Voltage	120V AC	120V AC
Actuator Style	White Toggle	Flat Rocker
Insulating Panel Back	-	2 x 1331 sold separately (p. 150)
AC Meter	0-150V (9353)	-
Width x Height in (mm)	5.25 (133.35) x 7.50 (190.50)	9.25 (234.95) x 4.75 (120.65)
Depth in (mm)	3.50 (88.9)	3.99 (101.4)

AC Source Selection Circuit Breaker Panels

Allows selecting between multiple AC sources to supply power to the AC branch distribution system

Features

- Lockout slides ensure that no two sources of AC power are connected to the circuit simultaneously
- · Backlit label positions

Component References

- A-Series Circuit Breakers (p. 78)
- AC Analog Meters (p. 136)
- AC Digital Multimeter (p. 142)
- Red reverse polarity indication LED (p. 151)
- Green ON indicating LEDs (p. 151)
- Traditional Metal Panels with branch circuit breakers include 8031 label set (p. 152)
- 360 Panels with branch circuit breakers include 4206 label set (p. 153)
- All panels include a reverse polarity label and a source selection label set (p. 153)









	1208	1209	1231	1232	8032	8132	8061	8161
Style	360 Panel System		360 Panel System		Traditional Metal		Traditional Metal	
Total Positions	2 Sou	ırces	2 Sou	ırces	2 Sources		2 Sources	
A-Series Circuit Breakers	2 Main, 30A (7574)	2 Main, 16A (7572)	2 Main, 50A (7577)	2 Main, 32A (7575)	2 Main, 30A (7238)	2 Main, 16A (7294)	2 Main, 50A (7242)	2 Main, 32A (7295)
Nominal Voltage	120V AC	230V AC	120V AC	230V AC	120V AC	230V AC	120V AC	230V AC
Actuator Style	Raised	Rocker	Raised Rocker		White Toggle		White Toggle	
Insulating Back Cover	1331 sold sepa	arately (p. 150)	1331 sold separately (p. 150)		4026 sold separately (p. 151)		4026 sold separately (p. 151)	
Width x Height in (mm)	4.88 (123.83)	< 4.75 (120.65)	4.88 (123.83) x 4.75 (120.65)		5.25 (133.35) x 3.00 (76.20)		5.25 (133.35) x 3.00 (76.20)	
Depth in (mm)	3.00 (76.20)	3.00 (76.20)	3.00 (76.20)		3.00 (76.20)	







	8498	8598	8499	8599	8467	8567
Style	Tradition	nal Metal	Traditional Metal		Traditional Metal	
Total Positions	3 Sources + Transfer		2 Sources + 4 positions		2 Sources + 4 positions	
A-Series Circuit Breakers (PN)	2 Main, 30A (7238) 1 Main, 50A (7242) 1 Transfer, 30A (7238)	2 Main, 16A (7294) 1 Main, 32A (7295) 1 Transfer, 16A (7294)	2 Main, 30A (7238) 2 Branch, 15A (7210)	2 Main, 16A (7294) 2 Branch, 8A (7299)	2 Main, 30A (7238) 2 Branch, 15A (7210)	2 Main, 16A (7294) 2 Branch, 8A (7299)
Nominal Voltage	120V AC	230V AC	120V AC	230V AC	120V AC	230V AC
Actuator Style	White Toggle		White Toggle		White Toggle	
Insulating Back Cover	_	-			4027 sold separately (p. 151)	
Width x Height in (mm)	10.50 (266.70)	x 4.50 (114.30)	10.50 (266.70) x 4.50 (114.30)		5.25 (133.35) x 7.50 (190.50)	
Depth in (mm)	3.00 (76.20)	3.00 (76.20)		3.00 (76.20)	







	8489	8589	8462	8562	8466	8566	
Style	Tradition	ial Metal	Tradition	nal Metal	Traditional Metal		
Total Positions	2 Sources +	6 positions	2 Sources + 9 positions		2 Sources + 9 positions		
A-Series Circuit Breakers	2 Main, 30A (7238) 3 Branch, 15A (7210)	2 Main, 16A (7294) 3 Branch, 8A (7299)	2 Main, 30A (7238) 6 Branch, 15A (7210)	2 Main, 16A (7294) 6 Branch, 8A (7299)	2 Main, 30A (7238) 6 Branch, 15A (7210)	2 Main, 16A (7294) 6 Branch, 8A (7299)	
Nominal Voltage	120V AC	230V AC	120V AC	230V AC	120V AC	230V AC	
Actuator Style	White	Toggle	White Toggle		White Toggle		
Meter	0-150V (9353)	0-250V (9354)	0-150V (9353)	0-250V (9354)	-	-	
Insulating Back Cover	<u></u>		-				
Width x Height in (mm)	5.25 (133.35) x	11.25 (285.75)	10.50 (266.70) x 7.50 (190.50)		5.25 (133.35) x 11.25 (285.75)		
Depth in (mm)	3.00 (76.20)	3.00 (76.20)	3.00 (76.20)		



AC Source Selection Rotary Switch Panels

Provides a solution for managing AC sources when circuit protection is provided elsewhere

- Panels include green ON and red Reverse Polarity indicating LEDs and source selection label set (p.153)
- 360 Panel System panels include backlit label positions

30 Amp 2 Positions + OFF, 2 Pole Rotary Switch

- Switches 2 sources
- Allows connecting one of two different AC sources to one circuit

Source 1 (ex. SHORE) 120V or 230V Line (Hot) 120V or 230V Source 2 (ex. GEN) 120V or 230V SHORE GEN Neutral Line (Hot) Line (Hot) Line (Hot) Line (Hot) Load

Regulatory CE marked UL listed











9009
Rotary Switch
600V AC
14-10 AWG
-
1.89 (48.00) x 1.89 (48.00)
1.91 (48.51)

1481 360 Panel System 120V AC 14–10 AWG 1331 sold separately (p. 150) 4.88 (123.83) x 4.75 (120.65) 1.91 (48.51)


1484 360 Panel System 230V AC 14–10 AWG 1331 sold separately (p. 150) 4 4.88 (123.83) x 4.75 (120.65) 1.91 (48.51)

8367 Traditional Metal 120V AC 14–10 AWG 0) 4026 sold separately (p. 151) 5) 5.25 (133.35) x 3.75 (95.25) 1.91 (48.51)

8359 Traditional Metal 230V AC 14–10 AWG 1) 4026 sold separately (p. 151) 5.25 (133.35) × 3.75 (95.25) 1.91 (48.51)

65 Amp 2 Positions + OFF, 2 Pole Rotary Switch

- · Switches 2 sources
- Allows connecting one of two different AC sources to one circuit

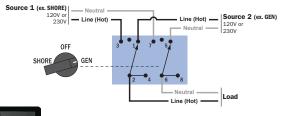













9011
Rotary Switch
600V AC
12-6 AWG
=
2.52 (64.00) x 2.52 (64.00)
2.41 (61.21)

1483
360 Panel System
120V AC
12-6 AWG
1331 sold separately (p. 150)
4.88 (123.83) x 4.75 (120.65)
2.41 (61.21)

1486
360 Panel System
230V AC
12-6 AWG
1331 sold separately (p. 150)
4.88 (123.83) x 4.75 (120.65)
2.41 (61.21)

	8365	
	Traditional Metal	
	120V AC	
	12-6 AWG	
)	4026 sold separately (p. 151)	
)	5.25 (133.35) x 3.75 (95.25)	
	2.41 (61.21)	

	835/			
	Traditional Metal			
	230V AC			
	12-6 AWG			
51)	4026 sold separately (p. 151)			
5)	5.25 (133.35) x 3.75 (95.25)			
	2.41 (61.21)			

30 Amp 3 Positions + OFF, 2 Pole Rotary Switch

- Switches 3 sources
- · Allows connecting one of three different AC sources to one circuit

Regulatory CE marked UL listed












	9010	1482	1485	8366	8358
Style	Rotary Switch	360 Panel System	360 Panel System	Traditional Metal	Traditional Metal
Voltage Max. Operating	600V AC	120V AC	230V AC	120V AC	230V AC
Wire Size Range	14-10 AWG	14-10 AWG	14-10 AWG	14-10 AWG	14-10 AWG
Insulating Panel Back	-	1331 sold separately (p. 150)	1331 sold separately (p. 150)	4026 sold separately (p. 151)	4026 sold separately (p. 151)
Width x Height in (mm)	1.89 (48.00) x 1.89 (48.00)	4.88 (123.83) x 4.75 (120.65)	4.88 (123.83) x 4.75 (120.65)	5.25 (133.35) x 3.75 (95.25)	5.25 (133.35) x 3.75 (95.25)
Depth in (mm)	2.41 (61.21)	2.41 (61.21)	2.41 (61.21)	2.41 (61.21)	2.41 (61.21)

65 Amp 2 Positions + OFF, 3 Pole Rotary Switch

- Allows connecting one of two different AC sources to one circuit
- Switches 2-120/240 Volt AC sources
- · Switches both lines (hots) and neutral




Regulatory

CE marked UL listed

			KBLUI MA IVITES
	9019	1487	8363
Style	Rotary Switch	360 Panel System	Traditional Metal
Voltage Max. Operating	600V AC	240V AC	240V AC
Wire Size Range	12-6 AWG	12-6 AWG	12-6 AWG
Insulating Panel Back			
Width x Height in (mm)	2.52 (64.00) x 2.52 (64.00)	4.88 (123.83) x 4.75 (120.65)	5.25 (133.35) x 3.75 (95.25)
Depth in (mm)	3.65 (92.71)	3.65 (92.71)	3.65 (92.71)

30 Amp 2 Positions + OFF, 4 Pole Rotary Switch

- Switches between 2–120 Volt AC shore power sources and 1–120/240 Volt AC source to 2–120 Volt AC load groups
- Switches both lines (hots) and neutral

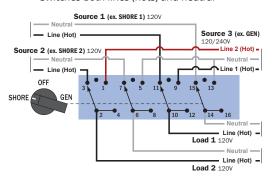

Regulatory

CE marked UL listed








	6337	1489	8386
Style	Rotary Switch	360 Panel System	Traditional Metal
Voltage Max. Operating	600V AC	240V AC	240V AC
Wire Size Range	14-10 AWG	14-10 AWG	14-10 AWG
Insulating Panel Back	-	1331 sold separately (p. 150)	-
Width x Height in (mm)	1.89 (48.00) x 1.89 (48.00)	4.88 (123.83) x 4.75 (120.65)	5.25 (133.35) x 3.75 (95.25)
Depth in (mm)	2.98 (75.69)	2.98 (75.69)	2.98 (75.69)

65 Amp 2 Positions + OFF, 4 Pole Rotary Switch

- Switches between 2–120 Volt AC shore power sources and 1–120/240 Volt AC source to 2–120 Volt AC load groups
- Switches both lines (hots) and neutral

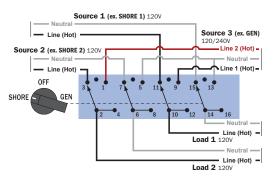

Regulatory CE marked

CE marked UL listed








	9093	1480	8369
Style	Rotary Switch	360 Panel System	Traditional Metal
Voltage Max. Operating	600V AC	240V AC	240V AC
Wire Size Range	12-6 AWG	12-6 AWG	12-6 AWG
Insulating Panel Back			
Width x Height in (mm)	2.52 (64.00) x 2.52 (64.00)	4.88 (123.83) x 4.75 (120.65)	5.25 (133.35) x 3.75 (95.25)
Depth in (mm)	4.50 (114.30)	4.50 (114.30)	4.50 (114.30)

65 Amp 3 Positions + OFF, 3 Pole Rotary Switch

- Allows connecting one of three different AC sources to one circuit
- Switches 3-120/240 Volt AC sources
- · Switches both lines (hot) and neutral

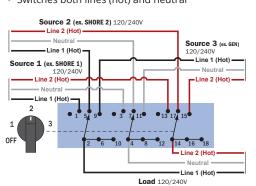

Regulatory CE marked UL listed







	9077	1488	8361
Style	Rotary Switch	360 Panel System	Traditional Metal
Voltage Max. Operating	600V AC	240V AC	240V AC
Wire Size Range	12-6 AWG	12-6 AWG	12-6 AWG
Insulating Panel Back			
Width x Height in (mm)	2.52 (64.0) x 2.52 (64.0)	4.88 (123.83) x 4.75 (120.65)	5.25 (133.35) x 3.75 (95.25)
Depth in (mm)	5.50 (139.70)	5.50 (139.70)	5.50 (139.70)



AC/DC Combination Circuit Breaker Panels

Combines AC and DC switching, circuit protection, source selection and monitoring into a single panel

Features

- ON indicating LEDs installed in all circuit positions
- Backlit label positions
- Includes toggle switch to monitor voltage on up to three batteries
- Circuit identification label sets included
- Insulating covers are included with AC/DC 360 Panels

Component References

- A-Series Circuit Breakers (p. 78)
- C-Series Circuit Breakers (p. 80)
- DC and AC Analog Meters (p. 136, 137)
- DC and AC Digital Multimeters (p. 142, 143)
- 360 Panel System AC Insulating Rear Covers (p. 150)
- Traditional Metal Panel AC insulating Rear Covers (p. 151)
- Traditional Metal Panels include 8031 and 8030 label set (p. 152)
- 360 Panels include 4206 and 4205 label set (p. 153)





	8084	8184	8095	8195
Style Traditional Metal		Traditional Metal		
Total AC Positions	Main + 6 positions		Main + 8 positions	
Total DC Positions	Main + 15	positions	Main + 29	positions
AC Circuit Breakers	Main, 30A (7238) 3 Branch, 15A (7210)	Main, 16A (7294) 3 Branch, 8A (7299)	Main, 30A (7238) 5 Branch, 15A (7210)	Main, 16A (7294) 5 Branch, 8A (7299)
DC Circuit Breakers	Main, 100A (7250I) 9 Branch, 15A (7210)	Main, 100A (7250I) 9 Branch, 15A (7210)	Main, 100A DC (7250I) 20 Branch, 15A DC (7210)	Main, 100A (7250I) 20 Branch, 15A (7210)
AC/DC Voltage	120V AC/12V DC	230V AC/12V DC	120V AC/12V DC	230V AC/12V DC
Insulating Panel Back	4029 sold sepa	arately (p. 151)	-	
Actuator Style	White '	Toggle	White T	oggle
AC Meters	0-150V AC (9353)	0-250V AC (9354)	0-150V AC (9353), 0-50A AC (9630)	0-250V AC (9354), 0-50A AC (9630)
DC Meters	8-16V DC (8003), 0-100A DC (8017)		8-16V DC (8003), 0-100A DC (8017)	
Width x Height in (mm) 14.75 (374.65) x 10.00 (254.00)		(10.00 (254.00)	19.50 (495.30) x 11.50 (292.10)	
Depth in (mm) 3.00 (76.20)		76.20)	3.00 (76.20)	



	1218	1219	
Style	360 Panel System		
Total AC Positions	Main + 6 positions		
Total DC Positions	Main + 19 positions		
AC Circuit Breakers	Main, 30A (7414) 6 Branch, 15A (7403)	Main, 16A (7412) 6 Branch, 8A (7401)	
DC Circuit Breakers	Main, 100A (7549) 19 Branch, 15A (7403)	Main, 100A (7549) 19 Branch, 15A (7403)	
AC/DC Voltage	120V AC/12V DC	230V AC/12V DC	
Insulating Panel Back	1331 Included with panel (p. 150)		
Actuator Style	Flat Rocker		
AC Meter	Digital Multimeter (8247)		
DC Meter	Digital Multimeter (8248)		
Width x Height in (mm)	13.63 (346.08) x 10.75 (273.05)		
Depth in (mm)	4.00 (101.60)		

230 Volt (typical of Europe)





	8408	8508	8086	8186
Style	Traditional Metal		Traditional Metal	
Total AC Positions	Main + 6 positions		3 Sources + 12 positions + Transfer	
Total DC Positions	Main + 18	positions	Main + 19 positions	
AC Circuit Breakers	Main, 30A (7238) 3 Branch, 15A (7210)	Main, 16A (7294) 3 Branch, 8A (7299)	2 Main, 30A (7238) 1 Main, 50A (7242) 1 Transfer, 30A (7238) 6 Branch, 15A (7210)	2 Main, 16A (7294) 1 Main, 32A (7295) 1 Transfer, 16A (7294) 6 Branch, 8A (7299)
DC Circuit Breakers	Main, 100A (7250I) 12 Branch, 15A (7210)	Main, 100A (7250I) 12 Branch, 15A (7210)	Main, 100A (7250I) 13 Branch, 15A (7210)	
AC/DC Voltage	120V AC/12/24V DC	230V AC/12/24V DC	120V AC/12V DC	230V AC/12V DC
Insulating Panel Back	4029 sold sep	arately (p. 151)	4031 sold separately (p. 151)	
Actuator Style	White	Toggle	White Toggle	
AC Meters	Digital Multi	meter (8247)	0-150V (9353), 0-50A (9630)	0-250V (9354), 0-50A (9630)
DC Meters	Digital Multimeter (8248)		8-16V (8003), 0-100A (8017)	
Width x Height in (mm) 15.75 (400.05) x 10.00 (254.00)		19.50 (495.30) x 11.50 (292.10)		
Depth in (mm) 4 00 (101 60)		3 00 (76 20)		



Design and Order a Custom Panel in Three Easy Steps

Design and Order custom panels online

A Custom 360 Panel can be created in a fraction of the time required by other custom panel shops. The 360 Panel System uses an open frame to mount a broad selection of modules, allowing multiple functions to be combined in a single panel. This innovative design offers a wide choice of AC and DC panel features, can accommodate future changes, and permits rapid assembly. With options ranging from battery management to source selection, the 360 Panel System provides a wide range of design flexibility.





Blue Sea Systems labels are made using a scratch resistant polycarbonate material and are back-printed for durability. Custom Labels for the 360 Panel System can be ordered in any language and are available directly from Blue Sea Systems along with over 500 standard or square format labels.



1

Launch

the Panel Wizard at panelwizard.bluesea.com.



2


Design

the panel with modules, circuit breakers, and labels. The list price is updated with each change.

3

Save

the panel design and request a quote. Panels ship within ten business days of order receipt.

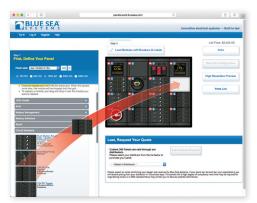



Completed 3 × 3 Panel



Custom 360 Panel System

Flexible frame and module configurations from a single module to a 25 module panel with 100 circuit breakers.

Rows x Columns	Height in (mm)	Width in (mm)	Cut out Height in (mm)	Cut out Width in (mm)
1 x 1	4.75 (120.65)	4.88 (123.83)	3.31 (84.07)	4.38 (111.13)
2 x 1	7.75 (196.85)	4.88 (123.83)	6.31 (160.27)	4.38 (111.13)
3 x 1	10.75 (273.05)	4.88 (123.83)	9.31 (236.47)	4.38 (111.13)
4 x 1	13.75 (349.25)	4.88 (123.83)	12.31 (312.67)	4.38 (111.13)
5 x 1	16.75 (425.45)	4.88 (123.83)	15.31 (388.87)	4.38 (111.13)
1 x 2	4.75 (120.65)	9.25 (234.95)	3.31 (84.07)	8.75 (222.25)
2 x 2	7.75 (196.85)	9.25 (234.95)	6.31 (160.27)	8.75 (222.25)
3 x 2	10.75 (273.05)	9.25 (234.95)	9.31 (236.47)	8.75 (222.25)
4 x 2	13.75 (349.25)	9.25 (234.95)	12.31 (312.67)	8.75 (222.25)
5 x 2	16.75 (425.45)	9.25 (234.95)	15.31 (388.87)	8.75 (222.25)
1 x 3	4.75 (120.65)	13.63 (346.08)	3.31 (84.07)	13.13 (333.38)
2 x 3	7.75 (196.85)	13.63 (346.08)	6.31 (160.27)	13.13 (333.38)
3 x 3	10.75 (273.05)	13.63 (346.08)	9.31 (236.47)	13.13 (333.38)
4 x 3	13.75 (349.25)	13.63 (346.08)	12.31 (312.67)	13.13 (333.38)
5 x 3	16.75 (425.45)	13.63 (346.08)	15.31 (388.87)	13.13 (333.38)
1 x 4	4.75 (120.65)	18.00 (457.20)	3.31 (84.07)	17.50 (444.50)
2 x 4	7.75 (196.85)	18.00 (457.20)	6.31 (160.27)	17.50 (444.50)
3 x 4	10.75 (273.05)	18.00 (457.20)	9.31 (236.47)	17.50 (444.50)
4 x 4	13.75 (349.25)	18.00 (457.20)	12.31 (312.67)	17.50 (444.50)
5 x 4	16.75 (425.45)	18.00 (457.20)	15.31 (388.87)	17.50 (444.50)
1 x 5	4.75 (120.65)	22.38 (568.33)	3.31 (84.07)	21.88 (555.63)
2 x 5	7.75 (196.85)	22.38 (568.33)	6.31 (160.27)	21.88 (555.63)
3 x 5	10.75 (273.05)	22.38 (568.33)	9.31 (236.47)	21.88 (555.63)
4 x 5	13.75 (349.25)	22.38 (568.33)	12.31 (312.67)	21.88 (555.63)
5 x 5	16.75 (425.45)	22.38 (568.33)	15.31 (388.87)	21.88 (555.63)

Custom BusBar Modules NEW

Consolidate bussed terminations in a 360 **Custom Panel module**

- Utilize blank space in a 360 Custom Panel frame
- Ideal for DC negative, AC Neutral, and AC Ground connections
- 5 different bus bar configuration options

Panel Backs Shown Below



2x1 Panel 2722




2x1 Panel


2702


2x1 Panel 2x1 Panel 2301 2128



2x1 Panel 2701







EDHARA	1 x 4 Panel	
	2 x 4 Panel	
	3 x 4 Panel	
	4 x 4 Panel	
\$2000.00A	5 x 4 Panel	

\$25000 N/A	1 x 5 Panel	
	2 x 5 Panel	
	3 x 5 Panel	
	4 x 5 Panel	
8299194	5 x 5 Panel	



m-Series Battery Switch (p. 26)



m-ACR Automatic Charging Relay (p. 42)



m-LVD Low Voltage Disconnect (p. 36)



Battery Management (p. 90)



Battery Management Blank



P12 Battery Charger Remote Display (p. 16)



DC Flat Rocker Circuit Breaker (p. 79)



Rotary Switch Source Selection (p. 124)



M2 OLED Meter (p. 138)



2 Inch Gauge (p. 146)



COTS Circuit Breaker (p. 76)



Circuit Breaker Source Selection



Digital Meter (p. 142)



2 Inch Gauge Blank (p. 146)



Push Button Circuit Breaker with Rocker Switch (p. 71, 90)



Residual Current Circuit Breaker (p. 83)



Vessel Systems Monitor (p. 140)



Socket, Dual USB Charger (p. 20, 21)



Push Button Circuit Breaker (p. 71)



European RCBO Mount



Analog Meter (p. 136)



DC Accessories (p. 144, 20, 21)



Bilge Pump



Medium Duty Push Button Circuit Breaker (p. 72)



DIN Meter (p. 136)



120V AC Dual Outlet (p. 150)



AC Flat Rocker Circuit Breaker (p. 79)



285 Series Circuit Breaker (p. 74)



Blank / Custom BusBar Module



120V AC Dual Outlet Blank

Custom 360 Panel SystemOriginal equipment aboard the world's finest boats and specialty vehicles

Blue Sea Systems Custom 360 Panels are installed as original equipment aboard recreational and commercial boats, emergency response vehicles, and commercial applications.





Sabre Yachts installs Custom 360 Panels at the helm of their Maine-built boats, including the flagship 54 Flybridge Sedan.



EarthRoamer builds vehicles which can go beyond where the road ends. They rely on Blue Sea Systems electrical products, including the Custom 360 Panel, $to\ keep\ their\ critical\ systems\ functioning.$









 $\it C\&\it C$ Yachts builds high performance sailboats and uses Custom 360 Panels to manage and monitor the AC and DC Power Distribution aboard the Redline 41.







MJM Yachts builds boats which use Blue Sea Systems products including Custom 360 Panels aboard the 36Z.



fleets around the world.

METERS

Analog





AC and DC Meters with backlighting for low light conditions.

M2 OLED Digital



Measures essential electrical system parameters with adjustable alarms and an auto-dimming display.

Vessel Systems Monitor





Performs comprehensive monitoring of four systems in one compact meter.

Digital






Monitors key AC and DC functions.

Mini OLED Digital





Monitors key functions on a bright, waterproof, daylight readable screen.

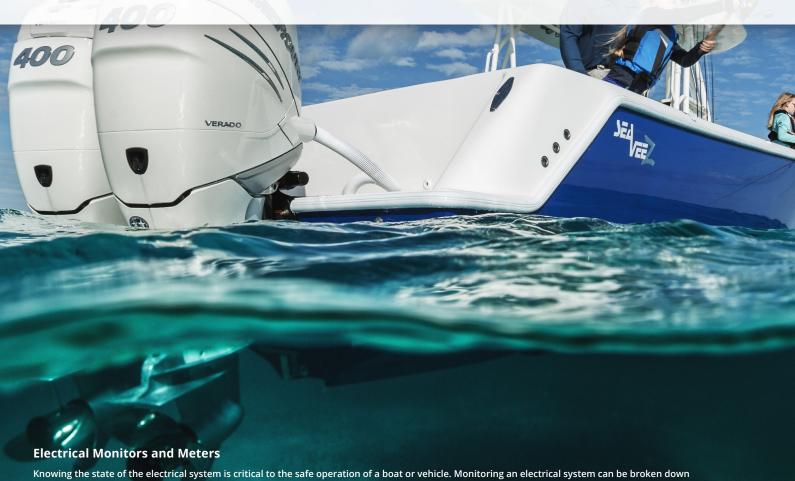

Knowing the state of the electrical system is critical to the safe operation of a boat or vehicle. Monitoring an electrical system can be broken down into two categories:

1. DC Monitoring

Direct Current is typically derived from batteries, but can also be produced by converting AC Current to DC Current using a battery charger. DC values are typically measured in Volts, Amps and Amp-Hours (State-of-Charge).

2. AC Monitoring

Alternating Current, known more typically as household current, can also be produced by converting DC current to AC current through the use of an inverter. Typically the values measured are Volts, Amps, Watts, and Frequency.

METERS

Mini Clamp Multimeter



and feature-rich
AC/DC Multimeter
simplifies diagnosis
of marine electrical
problems.

Round Gauges





Provides monitoring of key functions.

DC Shunts





For use with DC Ammeters.

Temperature Sensors




For use with the M2 OLED and Mini OLED Meters.

AC Transformers



For use with AC Ammeters.

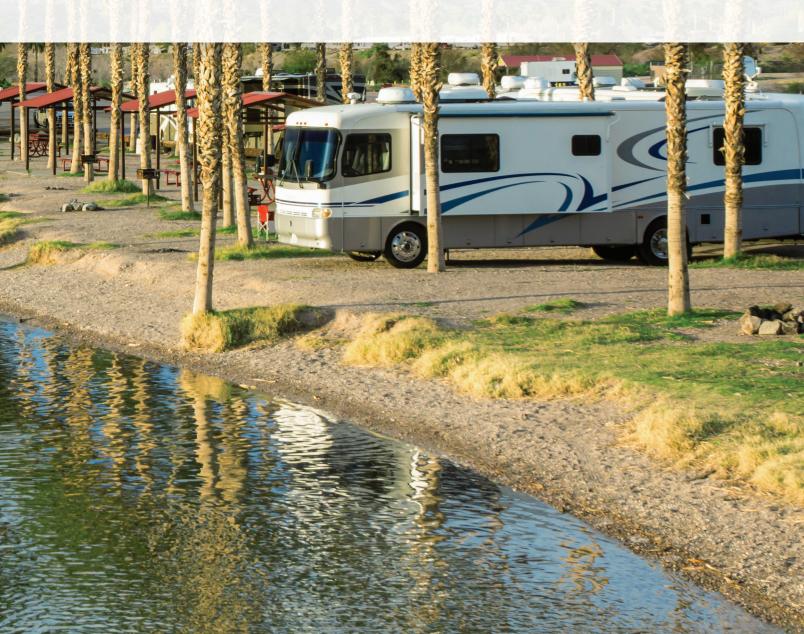



DC Analog Meters

Meters with backlighting for low light conditions

- Includes appropriate external DC shunt (p. 147) when required
- Backlit meter face (separate 12 or 24V DC backlight connections)
- DIN Meters include a terminal cover included to prevent accidental short circuit
- DIN Meters are a standard European 72mm design
- DIN Meter face is white matte with black printed scale and knife-edge pointer



PN





Operating Amps Operating Amps (Meter) (Backlight) Function

8028	Micro Voltmeter 8–16V DC	1 mA at full scale	1
8243	Micro Voltmeter 18-32V DC	1 mA at full scale	1
8003	Standard Voltmeter 8–16V DC	1 mA at full scale	1
8240	Standard Voltmeter 18–32V DC	1 mA at full scale	1
1050	DIN Voltmeter 0–16V	1 mA at full scale	1

16 mA@12V DC, 20 mA@24V DC 2 wire, 3 connections for backlight 16 mA@12V DC, 20 mA@24V DC 2 wire, 3 connections for backlight 16 mA@12V DC, 20 mA@24V DC 2 wire, 3 connections for backlight

16 mA@12V DC, 20 mA@24V DC 2 wire, 3 connections for backlight

Connection

16 mA@12V DC, 20 mA@24V DC 2 wire, 3 connections for backlight

1 mA at full scale 16 mA@12V DC, 20 mA@24V DC 2 wire, 3 connections for backlight



8038

1051 DIN Voltmeter 18-32V





1052

DC Analog Voltmeter Panels

Enables voltage monitoring on up to 3 battery banks with one analog meter

- Includes standard 8003 DC Analog Voltmeter
- Displays voltage from 8–16V DC
- 3 position switch for multiple battery banks



8015 **Traditional Metal**

5.25" x 3.75" (133.35mm x 95.25mm)



360 Panel System

4.88" x 4.75" (123.83mm x 120.65mm)

PN	Function	Operating Amps (Meter)	Operating Amps (Backlight)	Shunt Type	Connection
8038	Micro Ammeter 0–15A DC	1 mA at full scale	16 mA@12V DC, 20 mA@24V DC	Internal	2 wire inline, 3 connections for backlight
8041	Micro Ammeter 0-50A DC	1 mA at full scale	16 mA@12V DC, 20 mA@24V DC	External—50 mV at meter full scale	2 wire from shunt, 3 connections for backlight
8005	Standard Ammeter 0–25A DC	1 mA at full scale	16 mA@12V DC, 20 mA@24V DC	Internal	2 wire inline, 3 connections for backlight
8022	Standard Ammeter 0–50A DC	1 mA at full scale	16 mA@12V DC, 20 mA@24V DC	External—50 mV at meter full scale	2 wire from shunt, 3 connections for backlight
8017	Standard Ammeter 0–100A DC	1 mA at full scale	16 mA@12V DC, 20 mA@24V DC	External—50 mV at meter full scale	2 wire from shunt, 3 connections for backlight
8018	Standard Ammeter 0–150A DC	1 mA at full scale	16 mA@12V DC, 20 mA@24V DC	External—50 mV at meter full scale	2 wire from shunt, 3 connections for backlight
8019	Standard Ammeter 0–200A DC	1 mA at full scale	16 mA@12V DC, 20 mA@24V DC	External—50 mV at meter full scale	2 wire from shunt, 3 connections for backlight
1052	DIN Ammeter 0-25A DC	1 mA at full scale	16 mA@12V DC, 20 mA@24V DC	Internal	2 wire inline, 3 connections for backlight
1053	DIN Ammeter 0-50A DC	1 mA at full scale	16 mA@12V DC, 20 mA@24V DC	External—50 mV at meter full scale	2 wire from shunt, 3 connections for backlight
1054	DIN Ammeter 0-100A DC	1 mA at full scale	16 mA@12V DC, 20 mA@24V DC	External—50 mV at meter full scale	2 wire from shunt, 3 connections for backlight
1055	DIN Ammeter 0-150A DC	1 mA at full scale	16 mA@12V DC, 20 mA@24V DC	External—50 mV at meter full scale	2 wire from shunt, 3 connections for backlight





8254 8253

PN	Function	Shunt Type	Connection	Meter Face Size in (mm)
8252*	Zero Center Ammeter 50-0-50A DC	External—50 mV at meter full scale	2 wire from shunt, 3 connections for backlight	2.75 (69.85)
8253*	Zero Center Ammeter 100-0-100A DC	External—50 mV at meter full scale	2 wire from shunt, 3 connections for backlight	2.75 (69.85)
8254*	Zero Center Micro Ammeter 50-0-50A DC	External—50 mV at meter full scale	2 wire from shunt, 3 connections for backlight	2.00 (50.80)

^{*}Meters read both discharge and charge current

AC Analog Meters


Meters with backlighting for low light conditions

- Includes appropriate external transformer (p. 147) when required
- Backlit meter face (separate 12 or 24V DC backlight connections)
- DIN Meters include a terminal cover included to prevent accidental short circuit
- DIN Meters are a standard European 72mm design
- DIN Meter face is white matte with black printed scale and knife-edge pointer







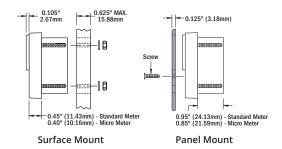

٠.		5555		
	Function		Operating Amps (Meter)	(

PN	Function	Operating Amps (Meter)	Operating Amps (Backlight)
8244	Micro Voltmeter 0-150V AC	1 mA at full scale	16 mA@12V DC, 20 mA@24V DC
8245	Micro Voltmeter 0-250V AC	1 mA at full scale	16 mA@12V DC, 20 mA@24V DC
9353	Standard Voltmeter 0–150V AC	1 mA at full scale	16 mA@12V DC, 20 mA@24V DC
9354	Standard Voltmeter 0-250V AC	1 mA at full scale	16 mA@12V DC, 20 mA@24V DC
1056	DIN Voltmeter 0-150V AC	1 mA at full scale	16 mA@12V DC, 20 mA@24V DC
1057	DIN Voltmeter 0–250V AC	1 mA at full scale	16 mA@12V DC, 20 mA@24V DC

Connection

2 wire to AC hot and neutral, 3 connections for backlight

2 wire to AC hot and neutral, 3 connections for backlight

2 wire to AC hot and neutral, 3 connections for backlight

2 wire to AC hot and neutral, 3 connections for backlight

2 wire to AC hot and neutral, 3 connections for backlight

2 wire to AC hot and neutral, 3 connections for backlight

2 wire to AC hot and neutral, 3 connections for backlight







PN	Function	Operating Amps (Meter)	Operating Amps (Backlight)
8246	Micro Ammeter 0-50A AC	50 mA at full scale	16 mA@12V DC, 20 mA@24V [
9630	Standard Ammeter 0–50A AC	50 mA at full scale	16 mA@12V DC, 20 mA@24V [
8258	Standard Ammeter 0–100A AC	50 mA at full scale	16 mA@12V DC, 20 mA@24V [
1058	DIN Ammeter 0-50A	50 mA at full scale	16 mA@12V DC, 20 mA@24V [

(Backlight)

Connection

16 mA@12V DC, 20 mA@24V DC

2 wire from coil slipped over wire to be measured, 3 connections for backlight

16 mA@12V DC, 20 mA@24V DC

2 wire from coil slipped over wire to be measured, 3 connections for backlight


16 mA@12V DC, 20 mA@24V DC


2 wire from coil slipped over wire to be measured, 3 connections for backlight


16 mA@12V DC, 20 mA@24V DC

2 wire from coil slipped over wire to be measured, 3 connections for backlight

2 wire from coil slipped over wire to be measured, 3 connections for backlight





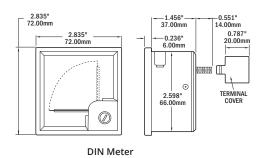



M2 OLED Digital Meters

The M2 Organic LED Digital Monitor measures essential electrical system parameters with adjustable alarms and an auto-dimming display. The M2 Monitors include a MOSFET External Circuit Relay (ECR) which can be used to control external circuits based on any value measured by the M2.

- · Auto-dimming, bright Organic LED display is easy to read
- · 80dB alarm on all models
- · Isolated 500mA MOSFET relay
- · Includes external DC Shunt or AC Current Transformer when required

Display Size 55mm x 28mm Power Supply Voltage 7V-70V DC* Range (Power Consumption) 0.3W-1.0W

* Variable with voltage, display intensity, and sleep mode

Regulatory

Monitor face is IP66 - protected against powerful water jets when installed according to instructions (see inside back cover)

M2 OLED Mounting Options








Surface mount Flat panel mount

1525 (meter not included)

PN	Description	Width in (mm)	Height in (mm)
1525	360 Blank Panel - M2 OLED	4.88 (123.83)	4.75 (120.65)

M2 OLED Surface Mount



Related Products



AC Current Transformer p. 147







Floyd Bell Turbo Series Alarm p. 150



DC Shunts





TECH tip.

State-of-Charge

Battery State-of-Charge (SoC)

Knowing the State-of-Charge of your battery is like knowing the amount of fuel in your gas tank. To avoid getting stranded with a dead battery, accurate battery bank monitoring is essential.

Voltmeter Method—Voltage can be used to measure the SoC of your battery. The difference from a fully charged battery to a fully discharged battery is only 1.0V in a 12V system, so the meter must have good resolution and accuracy. This method is generally sufficient to monitor batteries which experience intermittent use, such as starter or thruster batteries. However, a battery must not have been charged or discharged for over 12 hours for this measurement to be trustworthy. This makes the Voltmeter Method unsuitable for monitoring house batteries which charge and discharge often.

Amp-Hour Method—A convenient and accurate way to measure SoC is with an Amp-Hour Monitor. This is a complex calculation of the energy available, energy consumed, and energy returned to the battery during charging. SoC is commonly expressed as a percent of amp-hours remaining until the battery is empty, but can also be expressed as amp-hours used, amp-hours remaining, or time remaining. The advantage of this method is that it works well for batteries in a constant state of charge and discharge.

METERS

AC Meters

PN

Description

Functions

Voltage Accuracy

Operating

Current Current

Accuracy

Resolution (100 to 150) Resolution (0.0 to 99.9)

Frequency Range Resolution Power Range Resolution (0W-9990W) Resolution (10kW-45kW) Alarm/Relay

Range

Transformer

Range Resolution



Monitors current on two

1 x PN 8256 (150A/50mA)

0A-150A (300A optional) † --

Ammeter

7V-70V DC

± 2.0%

0.1A





1837	1838	PN
Voltmeter	Multimeter	Descri
Monitors voltage on two circuits or both legs of 120/240V	Monitors voltage, current, frequency, and power on two circuits or both legs of 120/240V	Functi
		Opera
± 1.0%	± 1.0%	
7V-70V DC	7V-70V DC	
50V-250V AC (RMS)	50V-250V AC (RMS)	Sende
1V AC	1V AC	
	1 x PN 8256 (150A/50mA)	Alarm
	± 2.0%	reciva
	0A-150A (300A optional) [†]	
	1A	Other
	0.1A	
	40Hz-90Hz	
	1 Hz	
	0W-45kW	
	10W	
	0.1kW	

Tank, Temperature & Bilge Meters







Description	Tank	Temperature	Bilge
Functions	Monitors up to 4 tanks	Monitors up to 4 locations	Monitors up to 4 bilges
Operating	7V-70V DC	7V-70V DC	7V-70V DC
Senders	North American, $240\Omega-33\Omega$ European, $10\Omega-180\Omega$ Blue Sea Systems Ultrasonic (1810, 1811) Custom Ranges to 300Ω	2 x PN 1820 2 x PN 1821 (included)	Float switch or pumps with bilge active outputs. Not compatible with "fully automatic bilge pumps"
Alarm/Relay Activation	High and Low Level	High and Low Temperature	Run time/hr Cycles/24 hr Average Cycles
Other	Custom tanks shapes Auto calibration	Measures in Fahrenheit or Celsius -40°C – 120°C (-40°F – 250°F)	Cycle Counter

DC Meters

Activation



High Current



High and Low Voltage



High and Low Voltage,





PN	1830	1832	1833	1834	PN	1850
Description	SoC Monitor	Ammeter	Voltmeter	Multimeter	Description	Vesse
Functions	Monitors state-of-charge on one battery bank and	Monitors current on two circuits	Monitors the voltage on up to four battery banks	Monitors the voltage of three battery banks and	Functions	Perform monito
ranctions	voltage on three battery banks			the current on one circuit	DC Specification	ns
Voltage					Nominal System Voltage	12V, 24
Voltages	12V, 24V, 36, 48V				Operating	7V-70V
Accuracy	± 1.0%		± 1.0%	± 1.0%	Minimum Current	
Operating	7V-70V DC		7V-70V DC	7V-70V DC	Draw Voltage Accuracy	8 mA @ ± 1%
Resolution	0.01V DC		0.01V DC	0.01V DC		
Current					Range Current	-500A
Shunt	1 x PN 8255 (500A/50mV)	1 x PN 8255 (500A/50mV)		1 x PN 8255 (500A/50mV)	Accuracy	± 1.0%
Accuracy	± 1.0%	± 1.0%		± 1.0%	AC Specification	ns
Range	-500A to 500A	-500A to 500A		-500A to 500A	Nominal	120V @
Resolution (100 to 500)	1A	1A		1A	System Voltage Operating Voltage	230V @ 0-300V
Resolution (99.9 to 500)	0.1A	0.1A	-	0.1A	Voltage Accuracy	± 1.0%
. ,	High and Low Voltage,			18 1 11 W k	Current Range	0-150A
Activation High Current, High Current,	High and Low Voltage	High and Low Voltage, High Current,	Current Accuracy	± 2%		
and Low Battery				g - 55		40-90H

PN	1850
Description	Vessel Systems Monitor
Functions	Performs comprehensive monitoring of four systems

Functions	Performs comprehensive monitoring of four systems	
DC Specification	ns	
Nominal System Voltage	12V, 24V, 36V, 48V	
Operating	7V-70V DC	
Minimum Current Draw	15 mA @12V, display off 8 mA @ 24V, display off	
Voltage Accuracy	± 1%	
Range	-500A to 500A	
Current Accuracy	± 1.0%	
AC Specification	ns	
Nominal System Voltage	120V @ 60Hz, North America 230V @ 50Hz, Typical of Europe	
Oneveting Valters		
Operating Voltage	0-300V	
Voltage Accuracy		

40-90Hz

 $^{^\}dagger$ Will achieve 300A with an optional current transformer PN 1829 (p. 147)



M2 Vessel Systems Monitor (M2 VSM)

Performs comprehensive monitoring of four critical systems in one compact organic LED digital monitor

DC System Monitoring (up to two batteries)

One input monitors the DC voltage, state-of-charge, current for one battery bank and another input monitors the voltage of an additional battery bank. Alarms include high and low voltage, high current, and low battery.

AC System Monitoring

The VSM monitors a single AC voltage, current, and frequency. Alarms include high and low voltage, high current, and high and low frequency.

Bilge & Tank Monitoring

The M2 VSM has two inputs that can be configured as a bilge or tank monitor. When configured as a bilge input, monitoring functions include pump active, cycle count in the last 24-hours, average cycles in a typical 24-hour period, and total cycles. High alarms can be set for both the minutes of run time in the last hour as well as the number or cycle counts in the last 24-hours. When configured as a tank input, tank status can be represented in both capacity (gallons or liters) or as a percentage of capacity. Custom tank shapes can be auto-calibrated or programmed. Both high and low level alarms can be set for all tanks.

DC Specifications

Nominal System Voltage 12V, 24V, 36V, 48V

Operating Voltage 7–70V

Minimum Current Draw 15mA @ 12V, display off

8mA @ 24V, display off

Voltage Accuracy +/- 1%

Current Range -500A to 500A

Current Accuracy +/- 1%

AC Specifications

Nominal System Voltage 120V @ 60Hz, North America

230V @ 50Hz, Typical of Europe

Operating Voltage 40–300V
Voltage Accuracy (RMS) +/- 1%
Current Range 0–150A
Current Accuracy (RMS) +/- 2%
Frequency 40–90Hz

Tank Senders Supported:

10-180 Ω VDO

240–33 Ω Teleflex

Blue Sea Systems Ultrasonic Tank Senders (sold separately)


- For diesel, water, or waste 1810 (32" tank depth)
- For gasoline 1811 (24" tank depth)

Retail Packaging Includes:

head unit, display cover, surface mount bezel, surface mount gasket, DC Current Shunt 8255, AC Current Transformer 8256, connectors, mounting screws and screw driver

Regulatory

Monitor face is IP66 - protected against powerful water jets, when installed according to instructions (see inside back cover)

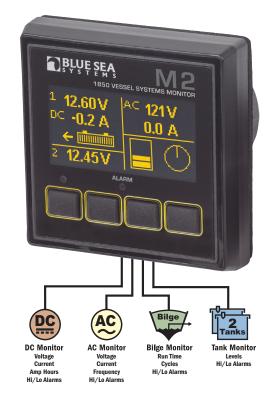

PN	Description
1850	M2 VSM
1810	32" Diesel, Water, Waste tank sender for use with VSM 422 & M2 VSM
1811	24" Gasoline tank sender for use with the VSM 422 & M2 VSM


Connection Table

System	Inputs	Functions
DC	2	DC Voltage Battery 1, State-of-Charge, & Current DC Voltage Battery 2
AC	1	AC Voltage, Current, & Frequency
Auxiliary	2	Auxiliary 1: Tank or Bilge







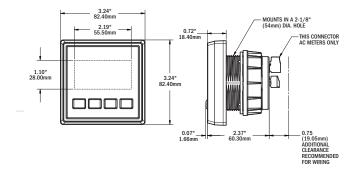

Vessel Systems Monitor (VSM 422)

Performs comprehensive monitoring of four boat systems in one compact meter, saving space and money

By monitoring DC, AC, tanks, and bilge pump, the VSM 422 alerts boaters to problems before they become emergencies.

The ability to monitor state-of-charge is critical to safe boating. By using a complex calculation of voltage, amperage, and amp-hours remaining, the VSM 422 is able to provide accurate and timely information about state-of-charge on the house battery to help boaters know when it's time to recharge.

The VSM 422 also monitors temperature on the primary battery with the 1820 Battery Temperature Sensor included in retail package.

AC monitoring includes voltage, amperage, wattage, and frequency. Tank monitoring for up to three tanks includes alarm functions for high and low levels, and bilge pump monitoring includes pump active, cycle count, and duration.

With its user-friendly interface, intuitive display modes, and versatile case design, the VSM 422 is an excellent replacement for four separate system monitors.

DC Specifications

Nominal System Voltage 12V or 24V 8.5-33.0V Operating Voltage

35mA @ 12V, backlight off Minimum Current Draw

18.8mA @ 24V, backlight off

Voltage Accuracy +/- 0.5% **Current Range** -500A to 500A

Current Accuracy +/- 1%

AC Specifications

Nominal System Voltage 120V @ 60Hz, North America

230V @ 50Hz, Typical of Europe

Operating Voltage 0-300V Voltage Accuracy (RMS) +/- 0.5% Current Range 0-150A Current Accuracy (RMS) +/- 2% Frequency 40-90Hz

Tank Senders Supported:

10-180 Ω VDO

240-33 Ω Teleflex

Blue Sea Systems Ultrasonic Tank Senders (sold separately)


- For diesel, water, or waste 1810 (32" tank depth)
- For gasoline 1811 (24" tank depth)

Retail Packaging Includes:

head unit, surface mount bezel, surface mount gasket, DC Current Shunt 8255, AC Current Transformer 8256, Battery Temperature Sensor 1820, connectors, mounting screws and screw driver

Regulatory

CE marked for E60945 electromagnetic interference Monitor face is IP67 - protected against immersion up to 1 meter for 30 minutes, when installed according to instructions (see inside back cover)

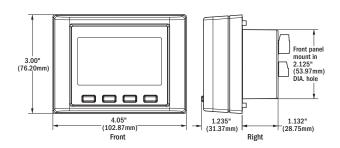



PN	Description
1800	VSM 422 retail packaged in box
1801	VSM 422 retail packaged in clam

Connection Table

System	Inputs	Functions
DC	2	DC Voltage Battery 1, State-of-Charge, & Current DC Voltage Battery 2
AC	1	AC Voltage, Current, & Frequency
Tank	2	Tank 1, Tank 2
Auxiliary	1	Tank 3, Bilge, or DC Voltage Battery 3



VSM 422 Panel Mounting Options





1325 (meter not included)



1519 (meter not included)

PN	Description	Width in (mm)	Height in (mm)
1325	360 Mounting Kit Module		
1519	360 Blank Panel - VSM 422	4.88 (123.83)	4.75 (120.65)



DC Digital Meters

Monitors key DC functions

- · Large, bright LED characters
- Three levels of brightness
- · Splash-proof front
- Easy to surface mount in a 2" round hole

Display Character Size 9/16"

Power Supply Voltage 8–50V DC

Max. Power Consumption 1.00W*

Min. Power Consumption 0.60W*



DC Multimeter with Alarm

Voltage Measurement:

 Range
 0-60V DC

 Resolution
 0.01V DC

 Accuracy (% of Reading)
 ± 0.5%**

Current Measurement:

 $\begin{array}{lll} \mbox{Shunt (Included)} & 500\mbox{A/50mV} \\ \mbox{Range} & \pm 500\mbox{A DC} \\ \mbox{Resolution (-100 to -500)} & 1\mbox{A DC} \\ \mbox{Resolution (-99.9 to +500)} & 0.1\mbox{A DC} \\ \mbox{Accuracy (% of Reading)} & \pm 0.5\%** \end{array}$



DC Voltmeter with Alarm

Voltage Measurement:

 Range
 0-60V DC

 Resolution
 0.01V DC

 Accuracy (% of Reading)
 ± 0.5%**




DC Ammeter


Current Measurement:

Shunt (Included)	500A/50mV
Range	± 500A DC
Resolution (-100 to -500)	1A DC
Resolution (-99.9 to +500)	0.1A DC
Accuracy (% of Reading)	± 0.5%**

Digital Meter Front Panel Mount

Surface mounting features a finger nut and locking ring for quick and easy installation into a 2.00" (50.8mm) diameter hole.





DC Digital Voltmeter Panels

Enables voltage monitoring on up to 3 battery banks with one digital meter

- Includes 8235 DC Digital Voltmeter
- 4 digit LED display—Displays voltage from 0-60V DC
- 3 position switch for multiple battery banks



8051



1474

PN	Width in (mm)	Height in (mm)
8051	5.25 (133.35)	3.75 (95.25)
1474	4.88 (123.83)	4.75 (120.65)



DC Voltmeter

Voltage Measurement:

 $\begin{array}{lll} \mbox{Range} & \mbox{O-60V DC} \\ \mbox{Resolution} & \mbox{0.01V DC} \\ \mbox{Accuracy (% of Reading)} & \pm 0.5\% ** \end{array}$

PN	Description	Measurement	Sleep Mode	Alarms
8248	DC Multimeter with Alarm	Voltage, Current	Programmable	High and low voltage
8235	DC Voltmeter	Voltage	Manual	
8251	DC Voltmeter with Alarm	Voltage	Programmable	High and low voltage
8236	DC Ammeter	Current	Manual	High and low voltage

^{*} Variable with voltage, display intensity, segments illuminated, and sleep mode

^{**± 1 (}Least Significant Digit)

AC Digital Meters

Monitors key DC functions

- · Large, bright LED characters
- · Three levels of brightness
- · Splash-proof front
- Easy to surface mount in a 2" round hole

Display Character Size 9/16"
Input Voltage 80–249V AC*
Max. Power Consumption 1.00W*
Standby Power 0.60W*



AC Ammeter

Current Measurement:

Current Transformer 150A/50mA
Range 1 (Resolution 0.01A) 0–9.99A AC (RMS)
Range 2 (Resolution 0.1A) 10–150.0A AC (RMS)
Accuracy (% of Reading) ± 3.0%***



AC Voltmeter

Voltage Measurement:

Range 80–249V AC*
Resolution 0.1V AC

Accuracy: (% of Reading)

90-249V AC (RMS) ± 2.0%*** 70-90V AC (RMS) ± 5.0%***



AC Multimeter with Alarm

Range 80–249V AC*
Resolution 0.1V AC

Accuracy: (% of Reading)

90-249V AC (RMS) ± 2.0%*** 70-90V AC (RMS) ± 5.0%***

Current Measurement:

Current Transformer 150A/50mA
Range 1 (Resolution 0.01A) 0.00–9.99A AC (RMS)
Range 2 (Resolution 0.1A) 10.0–150.0A AC (RMS)
Accuracy (% of Reading) ± 3.0%***

Frequency Measurement:

Range 40–90Hz
Resolution 0.1Hz
Accuracy (% of Reading) ± 0.1%***
Calibrated with sine wave input

Power Measurement:

Range 1 (Resolution 10W) 0–9990W
Range 2 (Resolution 0.1kW) 10–45kW
Accuracy (% of Reading) ± 5%***
Included Current Transformer 8256 (p. 145)

120/240V AC Digital Meter Mounting Panel

For monitoring 120/240V AC Systems

- Use with AC Digital Multimeter 8247 for monitoring 120/240V AC Systems
- Monitor Line 1 or Line 2 to Neutral and Line 1 to Line 2 voltages
- Includes two additional Current Transformers 8256 (p. 147) and mounting screws



8410 (meter not included) 120/240V AC Digital Meter Blank Panel

PN	Width in (mm)	Height in (mm)
8410	5.25 (133.35)	3.75 (95.25)

Analog and Digital Meter Mounting Panels

Provides an easy method of mounting meters

- Panel mounts standard 2-3/4" Analog or Digital Meters
- Includes mounting screws and center adjustment hole plug



8013 (meter not included) Accepts (1) 2-3/4" Analog or Digital Meter



1475 (meter not included)
Accepts (1) 2-3/4" Analog or Digital Meter

PN	Width in (mm)	Height in (mm)
1475	4.88 (123.83)	4.75 (120.65)
8013	5.25 (133.35)	3.75 (95.25)

PN
 Description
 Measurement
 Sleep Mode
 Alarms

 8238
 AC Ammeter
 Current
 Manual
 -

 8247
 AC Multimeter with Alarm
 Voltage, Current, Frequency, Power
 Programmable
 High and low voltage, High current

 8237
 AC Voltmeter
 Voltage
 Manual
 -

^{*} For 120 & 240 Volt AC single phase systems

^{**} Variable with voltage, display intensity, segments illuminated, and sleep mode

^{*** ± 5} LSD (Least Significant Digit)



Mini OLED Meters

Monitors essential electrical system parameters on a bright, waterproof, daylight readable OLED screen

- · Compact size enables mounting in any convenient location
- · Now available with yellow or blue OLED screens
- · Reverse polarity protected
- Mounts in a common 1-1/8 in hole

Cutout Dimensions 1-1/8" (29 mm) diameter Lifecycles Blue OLED: 10,000 hours Yellow OLED: 100,000 hours

Regulatory

CE marked

IP66 - protected against powerful water jets (see inside back cover)



PN	1733 1733200	1732 1732200	1741 1741200	1739 1739200
Description	Voltmeter	Ammeter	Temp Meter	Tank Meter
Nominal Voltage	12 / 24V DC	12 / 24V DC	12 / 24V DC	12 / 24V DC
Input Voltage	8V-36V DC	8V-36V DC	8V-36V DC	8V-36V DC
Max. Operating Current	15mA	15mA	10mA	17mA
Resolution	0.01V DC	0.1A	1°F or 1°C	5%
Accuracy	+/- 1%	+/- 2%	+/- 1.25%	
Intermittent: 5 min.		110A		
Cranking: 30 sec.		175A		
DC Shunt (included)		9230 (100A/50mV)		
Temp Sensor (included)			1821	
Monitors	8V -36V DC	-100A –100A DC	-40°F –250°F or -40°C–120°C	Tank Level
Compatible Senders				North American: $240-33\Omega$ European: $10-180\Omega$









Mini Clamp Multimeter

Compact and feature-rich AC/DC Multimeter simplifies diagnosis of marine electrical problems

- Clamp allows measurement of AC and DC current in wires without disturbing the circuits or contacting live terminals
- Compact size allows comfortable one hand operation, portability, and access to confined areas
- Auto range simplifies operation by automatically selecting the range that best fits the data
- Additional functions include: Data Hold, Overload Display, and AutoPower-Off
- True RMS AC measurement is accurate for normal sine wave and modified sine wave inverter output

AC Amperes	0.01-400A
AC Voltage	0.001-600V
DC Amperes	0.01-400A
DC Voltage	0.001-600V
Resistance/Continuity Alarm	$0.140\text{M}\Omega$
Measurement Resolution	4300 counts

Regulatory CE marked CAT III, 600 Volts

Description 8110 Mini Clamp Multimeter



Includes test leads and carrying case

Related Products





p. 147



1837

50-250V

2 channels AC

8237

80-249V

1 channel



Meter Comparison

* with alarm

8244

0-150V

8245

0-250V

1 channel

DC Voltmeters	;								
M2 OLED	Digital		Mini OLED Analog Micro		Analog Standard		DIN		
New PARA M2 House Battery 12.34 v			1285v 1285v NEW 1285v		2 10 11 12 10 14 19 14 10 14 1		V J J J J J J J J J J J J J J J J J J J		
p. 138	p. 1	142	p. 144	p. 136		p. 136		p. 136	
1833	8235	8251*	1733 & 1733200	8028	8243	8003	8240	1050	1051
7–70V	0-6	50V	8-36V	8-16V	18-32V	8-16V	18-32V	8-16V	18-32V
4 channels	1 channel		1 channel	1 cha	annel	1 channel		1 channel	

AC Voltmeter	s	DC Ammeters					
M2 OLED	Digital	Analog Micro	Analog Standard	DIN	M2 OLED	Digital	Mini OLED
Shore FA M2 Shore 119 v	1199	or to the control of	S 50 75 50 50 50 50 50 50 50 50 50 50 50 50 50	V MINIMUM Control of the Control of	Industrial M2 Industrial A A	<u>- 199</u> ,	65.8 A 65.8 A NEW ENVERA
p. 138	p. 142	p. 136	p. 136	p. 136	p. 138	p. 142	p. 144

0-150V 0-250V

1 channel

9354

9353

8246

0-50V

1 channel

1057 0-250V

1056

0-150V

1832

±500A

2 channels

8236

±500A

1 channel

1732 & 1732200

±100A

1 channel

DC Amme	DC Ammeters												
Analog Micro					Aı	nalog Standa	rd				DIN		
CONNECTION OF THE PROPERTY OF							A 11/1/15 10 10 10 10 10 10 10 10 10 10 10 10 10	20 as					
	p. 136					p. 136					p. 1	136	
8038	8041	8254	8005	8022	8017	8018	8019	8252	8253	1052	1053	1054	1055
0-15A	0-50A	50-0-50A	0-25A	D-25A					0-25A	0-50A	0-100A	0-150A	
	1 channel					1 channel				1 channel			

AC Ammeters					Bilge, Tank, and	l Temperature			
M2 OLED	Digital	Analog S	Standard	DIN	M2 OLED	M2 OLED	Mini OLED	Mini OLED	M2 OLED
Short FFA M2 Shore Current 4.5 Å	<u> </u>	AC AM	A DYSTONE	A CONTRACTOR OF THE PARTY OF TH	EMPHERA M2	71 77 77 15 15 15 15 15 15 15 15 15 15 15 15 15	85 % a:PHF PA	75.8° 25.899 95.4	ERHFINA M2
p. 138	p. 142	р.	136	p. 136	р. 1	138	p. 144	p. 144	p. 138
1836	8238	9630	8258	1058	1842	1839	1739 & 1739200	1741 & 1741200	1841
0-150A	0-150A	0-50A	0-100A	0-50A	Up to 4 bilges	Up to 4 tanks	1 tank	-40°C-120°C	-40°C-120°C
2 channels	1 channel	1 ch	annel	1 channel	4 channels	4 channels	1 channel	1 channel	4 channels

DC SoC Monitor	DC Multimeters	;	AC Multimeters	5	AC/DC Multimeters		
M2 OLED	M2 OLED	Digital	M2 OLED	Digital	M2 OLED VSM	Mini Clamp	VSM 422
Bright M2 Brown Bright W As a	House Battery 12.34 v	Total State	Sherry M2 Sherry 119 v 60 Hz 14 A	Door of discharges but the control of the control o	FORTY OF THE STATE		2,50F PA
p. 138	p. 138	p. 142	p. 138	p. 142	p. 138	p. 144	p. 141
1830	1834	8248	1838	8247	1850	8110	1800
12V, 24V, 36V, 48V 7-70V ±500A	7–70V ±500A	0-60V ±500A	50–300V 0–150A 40–90Hz 0–45kW	80–249V 0–150A 40–90Hz 0–45kW	7-70V DC, ± 500A DC 40–300V AC, 0–150A AC Bilge, Tank, State-of-Charge	0.01-400A AC 0.001-600V AC 0.01-400A DC 0.001-600V DC	0–150A AC, 0–300V AC, ± 500A DC, 8.5–33.0V DC, Bilge, Tank, State-of-Charge
3 x V DC channels 1 x A DC channel 1 x SoC channel	3 x V DC channels 1 x A DC channel	1 x V DC channel 1 x A DC channel	2 x V AC channels 2 x A AC channels	1 x V AC channel 1 x A AC channel	up to 5 channels	-	up to 7 channels



Round Gauges

Provides monitoring of key functions Gauges are offered for use in 360 Panels and are not available for retail purchase.

- · Watertight, fog resistant, and anti-scratch glass face
- Edge-lit
- Will fit panels up to 0.8" thickness

Temperature Max. Operating Temperature Min. Operating -4°F (-20°C) Operating Current (with edge-light) 180mA Operating Current (no edge-light) <100mA Gauge diameter 2.00" (50.80 mm) 2.06" (52.40 mm)

Mounting hole diameter Back clamp nuts torque

Regulatory CE marked

158°F (70°C)

5-7 in-lb













1026B gauge is not edge-lit



1028B





1029B

Voltage Max. Depth ΡN **Function** Operating in (mm) **1020B** Fuel Level E-1/2-F 16V DC 1.75 (44.45) 1021B Potable Water Level E-1/2-F 16V DC 1.75 (44.45) **1022B** Engine Temp 100–250°F 16V DC 1.75 (44.45) 1.75 (44.45) 1023B Oil Pressure 0-80 PSI/Bar 16V DC 1024B Water Pressure 0-30 PSI/kPa 16V DC 2.10 (53.54) 1025B Voltmeter 10-16 Volts 16V DC 1.75 (44.45) **1026B** Hour Meter—10,000 hrs 32V DC 2.40 (60.96) 1027B Battery Condition Indicator 16V DC 3.00 (76.20) **1028B** DC Ammeter 60–0–60 Amps 1.75 (44.45) 16V DC 2.70 (68.58) 1029B Clock—Quartz Analog 16V DC **1030B** Tank Level—North American 240Ω – 33Ω 16V DC 1.75 (44.45)

Gauge Panel

For Round Gauges



(Gauge not included)

Width in (mm) Height in (mm) Depth in (mm) **1510** 4.88 (123.83) 4.75 (120.65) 0.50 (12.70)



DC Shunts

Use with DC Ammeters

• For continuous operation, it is recommended that shunts not be run at more than two-thirds (66%) the rated current under normal conditions

Shunt Type Resistive Full Scale 50 mV

Amperage Max. Operating 66% of Rated Current
Amperage Int. (5 min.) 100% - Full scale rating
Amperage Int. (3 sec.) 300% - Full scale rating

PN	For Use With:	Ratio
9228	Analog Ammeter	50A DC/50mV DC
9230	Analog Ammeter	100A DC/50mV DC
9231	Analog Ammeter	150A DC/50mV DC
9233	Analog Ammeter	200A DC/50mV DC
8255	Digital Ammeter	500A DC/50mV DC







Temperature Sensors

Use with the P12 Battery Charger, M2 OLED Meters, M2 VSM, VSM 422, and Mini OLED Meters

• Installs with double-sided tape

Wire Size 16 AWG
Wire Length 1820 12" (31 cm)
Wire Length 1821 18" (46 cm)





Part#	IP Rating	Temperature Range
1820	IP68 Submersible	-40°F to 175°F (-40°C to 80°C)
1821	IP65 Non-submersible	-40°F to 300°F (-40°C to 150°C)

AC Current Transformers

Use with AC Ammeters

PN	For Use With:	Ratio
8073	Analog Ammeter	50A AC/50mA AC
8257	Analog Ammeter	100A AC/50mA AC
8256	Digital and M2 Ammeter	150A AC/50mA AC
1829	M2 Ammeter	300A AC/50mA AC





Related Products



2719 Enclosure p. 98



Mini OLED Digital Meters p. 144



M2 OLED Digital Meters p. 138



Digital Meters p. 142



VSM 422 p. 141



Mini Analog Meters p. 136



Standard Analog Meters p. 136



DIN Meters p. 136

ACCESSORIES

Floyd Bell Turbo Alarm





Adjustable extra loud volume and beep tone audibly alerts operator.

Insulating Back Covers



Provides electrical insulation for exposed panel backs.

120V AC Dual Outlet





Provides a 360 Panel System platform for mounting equipment, switching, and monitoring functions.

LED Indicators





LED Indicator Lights are easy to install, available in an assortment of colors, and provide visual indication of power or alerts.



ABYC standards mandate isolation of AC and DC components on combination panels. Stackable, screw-down covers protect AC components from coming into contact with tools, personnel, and DC wiring. Traditional Metal and 360 Panel System accessories include back covers for panels.

ACCESSORIES

Lockout Slides





Enables safe management of multiple AC sources which use double or triple pole circuit breakers.

Toggle Guard





Protects toggle circuit breakers from accidental switching.

Labels











Over 500 standard labels are available in large, small, square and round formats for use on Blue Sea Systems products including fuse blocks, busbar insulating covers, panels, switches and Contura switches. Custom Labels are available in any language and ship rapidly from the in-house printing facility. Labels can be easily ordered online at www.bluesea.com/labels.





Floyd Bell Turbo Series **DC Audible Alarm**

Extra loud beep tone audibly alerts operator



- · Rotating bezel adjusts alarm volume
- · Threaded attachment ring
- Fits 1 inch round aperture

12V / 24V DC Voltage Nominal Operating Voltage 5-30V DC **Operating Current** 5 mA @ 5V DC 25 mA @ 30V DC

Sound Level @ 25°C and 24"

85±5 dB(A) @ 5V DC 103±5 dB(A) @ 30V DC

Operating Frequency

2900 ± 250 Hz

Terminals

Male 1/4" Quick Connect

Regulatory

IP68 - Withstands water submergence and dust exposure **UL** Recognized

PN	Description
1070	Floyd Bell Turbo Series Alarm

Related Product



m-LVD Low Voltage Disconnect p. 36

360 Panel 12V to 24V DC **Conversion Kit**

Converts indicator LEDs from 12V DC systems




- Requires one kit per 12 Volt DC circuit breaker module
- Includes wire harness and panel identification label

PN	Description
4113	360 Panel 12V to 24V DC Conversion Kit

360 Panel Insulating Back Covers

Provides electrical insulation for exposed panel backs

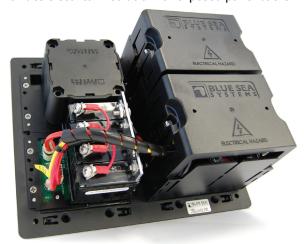


- Isolation of AC from DC components
- Meets ABYC safety requirements for panels with combined AC and DC loads
- · Modular design consists of interlocking pieces
- Interlocking pieces can be stacked to accommodate large components
- Cover breakouts allow wire access in any direction

UL 94-V0 Polycarbonate

Hardware 2 qty. #6 Phillips-drive sheet metal screws,

4 qty. #8-32 x 0.5" Phillips-drive machine screws with lock washers

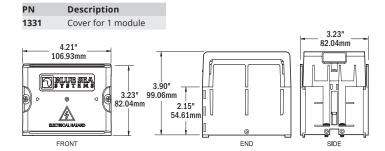

360 Panel Blank and 120V AC Dual Outlet

Provides a 360 Panel System platform for mounting equipment, switching, and monitoring functions

• 1518 is suitable for mounting accessories and for pad printing





1518


120V AC	
24 24	
E JBĻŲĘ SĘĄ	

1479 with 120V AC Dual Outlet 1479100 without 120V AC Dual Outlet

PN	Description	Width in (mm)	Height in (mm)	Depth in (mm)
1518	Blank Panel	4.88 (123.83)	4.75 (120.65)	0.50 (12.70)
1479	120V AC Dual Outlet Panel	4.88 (123.83)	4.75 (120.65)	1.00 (25.40)
1479100	Blank Outlet Panel	4.88 (123.83)	4.75 (120.65)	0.50 (12.70)

AC Insulating Back Covers

Provides electrical insulation for many of Blue Sea Systems Traditional Metal circuit breaker panels

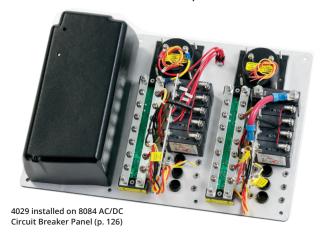

- Isolation of panel AC components from DC components
- · Provides mechanical protection for panel backs
- · Lightweight material is easily drilled for wire pass-through
- · Meet ABYC safety requirements
- 4029 and 4031–Used only for Blue Sea Systems toggle circuit breaker panels

Material UL-94-V0 Thermoplastic

PN	Description
4026	Cover for 5-1/4" x 3-3/4"
4027	Cover for 5-1/4" x 7-1/2"
4028	Cover for 10-1/2" x 7-1/2"
4029	Cover for 1 Column x 8 Position + Meter
4031	Cover for 2 Column x 10 Position + Meter

LED Indicator Lights

Directly replaces LEDs used in Blue Sea Systems Traditional Metal circuit breaker panels



- Simple push-in installation mounts in any thickness material
- · Useful as general indicator and alarm lights

Mounting Hole Size 11/64" (4.36 mm) Wire Gauge 26 AWG

PN	Color	Nominal Voltage	Current (mA)	Power Consumption (mW)	Circuit
8033	Amber	12 / 24V DC	1.5 @ 12V, 3.1 @ 24V	19 @ 12V, 75 @ 24V	Resistor
8171	Red	12 / 24V DC	1.5 @ 12V, 3.2 @ 24V	19 @ 12V, 77 @ 24V	Resistor
8172	Green	12 / 24V DC	1.5 @ 12V, 3.0 @ 24V	19 @ 12V, 73 @ 24V	Resistor
8169	Amber	120V AC	2.3 @ 120V	278 @ 120V	Resistor
8066	Red	120V AC	2.7 @ 120V	326 @ 120V	Resistor
8034	Green	120V AC	2.3 @ 120V	278 @ 120V	Resistor
8167	Amber	250V AC	1.1 @ 250V	276 @ 250V	Resistor + Diode
8166	Red	250V AC	1.1 @ 250V	276 @ 250V	Resistor + Diode
8134	Green	250V AC	1.1 @ 250V	276 @ 250V	Resistor + Diode

C-Series Circuit Breaker Lockout Slide

Enables safe management of multiple AC sources which use double or triple pole circuit breakers





4131

- Allows only 1 of a pair of double pole or triple pole AC toggle circuit breakers to be activated at a time
- Ensures AC power from 2 sources will not be mixed
- Fits all double or triple pole C-Series Toggle Circuit Breakers (p. 80)
- · Uses circuit breaker mounting screw holes
- Includes mounting screws

PN	Poles	AC Sources	Mounting
4130	2	2	#6 Pan Head Screw
4131	3	2	#6 Pan Head Screw

A-Series Circuit Breaker Lockout Slide

Enables safe management of multiple AC sources which use double pole circuit breakers





4126

- Allows 1 double pole AC toggle circuit breaker to be activated
- Ensures AC power from 2 or more sources will not be mixed
- Fits all double pole A-Series Toggle Circuit Breakers (p. 78)
- · Uses circuit breaker mounting screw holes
- · Includes mounting screws

PN	Poles	AC Sources	Mounting
4125	2	2	#6 Flat Head Screw
4126	2	3	#6 Flat Head Screw

Toggle Guard

Protects toggle circuit breakers from accidental switching

- Fits A-Series single pole toggle circuit breakers (p. 78)
- Fits all panel switches (p. 92)
- Uses circuit breaker mounting screw holes
- · Includes mounting screws



2 shown

PN	Description	Mounting
4100	Toggle Guard	#6 Flat Head Screw




Small Format Labels

Reinforced, waterproof labels

· Used on most Blue Sea Systems Contura Switch Water Resistant Panels (p. 110) and ST-Blade Fuse Blocks (p. 60-63)

• For a list of labels included see (p. 153)

PN	Color	Quantity
8214	Black	60 Labels
8217	Gray	60 Labels






BAJT BAJT BA

Square Format Labels

Reinforced, waterproof labels

- Used on 360 Panels (p. 112, 128), Battery Management Panels (p. 34), ST CLB Circuit Breaker Blocks (p. 70), SMS System (p. 84), and WeatherDeck® Panels (p. 111)
- For a list of labels included see (p. 153)
- · Available for purchase in sets or individually (p. 152-155)

PN	Color	Description	Quantity
4215	Black	DC Labels	30 Labels
4218	Black	DC Labels	30 Labels
4216	Black	DC Labels	60 Labels
4217	Black	DC Labels	120 Labels






4215


Large Format Labels

Reinforced, waterproof labels

- Used on Contura Water Resistant Fuse Panels 8053 & 8054 (p. 110)
- ST Glass Fuse Blocks (p. 57) and Traditional Metal Panels (p. 113)
- Available for purchase in sets or individually (p. 152-155)
- For a list of labels included see (p. 153)

PN	Color	Description	Quantity
8031	Black	AC Panel Basic	30 Labels
8067	Black	AC Panel Extended	120 Labels
8030	Black	DC Panel Basic	30 Labels
8039	Black	DC Panel Extended	120 Labels













8065, 8069, 8383, 8384 Label Backlight System See bluesea.com



Push Button Switches p. 91

Round Icon Labels NEW

Reinforced, waterproof labels

- Used on 15A Backlit Push Button Switches (p. 91)
- Also available in a set of 50 (p. 91) or custom printed
- To order individual labels, please indicate the PN (6526) and the label number. Examples below.

Individual Example: Round Icon Individual 6526-1001



Custom Example: Round Custom Text 6526



PN	Description	Label	PN	Description	Label
6526	CUSTOM	YOUR	1026	LIGHT	
1001	ACCESSORY	ACC	1027	LIGHT 1	
1002	ACCESSORY 1	ACC 1	1028	LIGHT ANCHOR	-(1)
1003	ACCESSORY 2	ACC 2	1029	LIGHT COURTESY	深
1004	ACCESSORY 3	ACC 3	1030	LIGHT COURTESY 1	深
1005	AERATOR		1031	LIGHT COURTESY 2	₹
1006	ALARM		1032	LIGHT FLOOD BOW	Sin
1007	ANCHOR	(†)	1033	LIGHT FLOOD COCKPIT	
1008	AUTO PILOT	AUTO	1034	LIGHT RUNNING	
1009	BATTERY SWITCH		1035	LIGHT SPREADER	
1010	BILGE BLOWER	F	1036	LIGHT SPREADER 2	
1011	BILGE PUMP		1037	LIGHT UNDERWATER BOW	R
1012	BILGE PUMP 1	F	1038	LIGHT UNDERWATER STERN	Sales Control
1013	BILGE PUMP 2	F 2	1039	LIVEWELL	TIME.
1014	BILGE PUMP 3	F 3	1040	LIVEWELL 1	0
1015	BLANK		1041	RADAR	
1016	DC OUTLET	DC	1042	SASQUATCH	4
1017	DEPTH SOUNDER		1043	STEREO	1
1018	ENGINE OFF		1044	THRUSTER	
1019	ENGINE START		1045	TRIM TAB	
1020	FAN		1046	VHF	
1021	FRESH WATER		1047	WASH DOWN	5
1022	GPS		1048	WINDSHIELD WASHER	
1023	GYRO		1049	WINDSHIELD WIPER CENTER	
1024	HORN	(3)	1050	WINDSHIELD WIPER LEFT	P
1025	HOSE DOWN	4	1051	WINDSHIELD WIPER RIGHT	1
		_			

Labels Included in Sets

ACCESSORY AERATOR ANCHOR LIGHT AUTOPILOT BAIT PUMP BILGE PUMP BLOWER CABIN LIGHTS **DEPTH SOUNDER FLECTRONICS** GPS HORN INSTRUMENTS KNOTMETER **NAV LIGHTS** RADAR REFRIGERATOR RUNNING LIGHTS SEARCH LIGHT SPREADER LIGHTS STEAMING LIGHT STEREO TRIM TABS VHF WASH DOWN WATER PRESSURE WATER PUMP WINDLASS

4206 and 8031

(BLANK) ACCESSORY AFT CABIN LIGHTS AFT CABIN OUTLETS AIR CONDITIONER AIR CONDITIONER 2 APPLIANCES
BATTERY CHARGER
CABIN OUTLETS COMPLITER ENTERTAINMENT CENTER FWD CABIN LIGHTS
FWD CABIN OUTLETS GALLEY OUTLETS HEATER INVERTER LIGHTS MACERATOR PUMP MAIN CABIN LIGHTS
MAIN CABIN OUTLETS MICROWAVE OUTLETS REFRIGERATOR SPARE STOVE TV/STEREO VCR WASHER/DRYER

4217

(BLANK) . 12 VOLŤ DC 12 VOLT DC OUTLETS 24 VOLT DO AIR HORN ANCHOR LIGHT MAIN ANCHOR LIGHT MIZZEN ANCHOR WASH DOWN APPLIANCES ARCH LIGHTS AUTO/MAN BAITWELL **BATTERY** BATTERY PARALLEL BILGE ALARM BILGE PUMP 2 BILGE PUMP ON-OFF-AUTO BOW LIGHT BOW THRUSTER BRIDGE INSTRUMENTS BRIDGE LIGHTS CABIN CB RADIO CD PLAYER CHART LIGHT CHART PLOTTER COCKPIT LIGHTS COMPASS LIGHT COURTESY LIGHTS DAVIT

DC OUTLETS DC SUB PANEL DECK LIGHTS DEFROSTER DEPTH/SPEED DIMMER DISCHARGE PUMP DOCKING LIGHT PORT DOCKING LIGHT STBD DOCKING LIGHTS DOWN RIGGER ELECTRIC HATCH ENGINE HATCH ENGINE INSTRUMENTS ENGINE ROOM BLOWER ENGINE ROOM LIGHTS **ENGINE SHUTDOWN**

ENTRY STEP

FIRE ALARM

FISH FINDER

FISHING LIGHT

FLOOD LIGHTS

FOG LIGHTS

FISHWELL PUMP

FLYBRIDGE LIGHTS

FIRE EXT

FAN

FAN 2

GAS ALARM GPS/PLOTTER HAILER HAM RADIO HEAD HEATER IGNITION INSTRUMENT LIGHTS
INTERCOM HAILER LAZARETTE LIGHTS LIGHTER LIGHTS LIVEWELL LOCKER LIGHTS LPG CONTROL MAIN MAST LIGHTS MASTHEAD LIGHT MIZZEN FLOOD NAVIGATION ELECTRONICS FLYBRIDGE FLYBRIDGE ELECTRONICS

FOREDECK LIGHT

FUEL PUMP

GALLEY

FUEL TRANSFER

FURLER JIB FURLER MAINSAIL

FRESH WATER PLIMP

FRESH WATER WASH DOWN

ON-OFF **OUTLETS** PUMP PUMPOUT RADIO ROD LOCKER RUDDER ANGLE INDICATOR SAILING CONTROLS
SAILING INSTRUMENTS SALT WATER PUMP SEAWATER WASH DOWN SHOWER SUMP PUMP SOLAR PANEL START-STOP STERN LIGHT STROBE LIGHT SUMP PUMP TRANSFER TRICOLOR LIGHT TROLLING MOTOR WASHDOWN PUMP WASHDOWN WINCHES WIND GENERATOR WIND INSTRUMENTS WINDSHIELD WASHER WIPER CENTER WIPER PORT

WIPER STBD

8214 and 8217

(BLANK) 12 VOLT DC ACCESSORY AFRATOR ANCHOR LIGHT AUTO PILOT BAIT PUMP BAITWELL RATTERY BATTERY CHARGER BILGE PLIME BLOWER BOW LIGHT CABIN CABIN LIGHTS CB RADIO CELLULAR PHONE CHARGER INVERTER CHART PLOTTER DECK LIGHTS DEPTH SOLINDER DOWN RIGGER ELECTRONICS FΔN FISH FINDER FISHING LIGHT FLOOD LIGHTS FUEL PUMP GAS ALARM GPS HORN IGNITION INSTR. LIGHTS INVERTER KNOT METER LIGHTS LIVEWELL NAV LIGHTS OUTLETS RADIO RADAR REFRIGERATION RUNNING LIGHTS SEARCH LIGHT SPARE SPREADER LIGHTS STEAMING LIGHT STEREO STROBE LIGHT TRICOLOR LIGHT TRIM TABS VHF WASH DOWN WATER PRESSURE WATER PUMP WINCHES WINDLASS

4218 12 VOLT DC 24 VOLT DC ALARM BILGE PUMP BILGE PUMP 2 BILGE PUMP 3 BILGE PUMP 4 BOW THRUSTER CLOCK DC MAIN DC SUB PANEL **ELECTRONICS** ENGINE **ENGINES** ENG 1/ENG 2 GENERATOR HOUSE HOUSE/ENG HOUSE/GEN INVERTER LIGHTS MEMORY PORT/STBD ENG RADAR RADIO SOLAR PANEL WINCH WINDI ASS Blank (Write On)

4205 and 8030

ACCESSORY ANCHOR LIGHT AUTOPILOT BILGE PUMP BLOWER COMPASS LIGHT DEPTH SOUNDER **ELECTRONICS** ENGINE INSTRUMENTS FAN FOREDECK LIGHT FWD CABIN LIGHTS GPS HORN KNOTMETER MACERATOR PLIMP MAIN CABIN LIGHTS RADAR REFRIGERATOR RUNNING LIGHTS SAILING INSTRUMENTS SPARE SPREADER LIGHTS STEAMING LIGHT STEREO STROBE LIGHT TRICOLOR LIGHT WATER PRESSURE

4216 (BLANK)

12 VOLT DC

BAITWELL

BATTERY

BII GE

12 VOLT DC OUTLETS

ANCHOR WASH DOWN

BATTERY PARALLEL

BILGE PUMP 2

BILGE PUMP ON-OFF-AUTO BOW LIGHT CABIN CB RADIO CELLULAR PHONE CHART LIGHT CHART PLOTTER COCKPIT LIGHTS COMPASS LIGHT
COURTESY LIGHTS DAVIT DC OUTLETS DC SUB PANEL DECK LIGHTS
DOCKING LIGHTS DOWN RIGGER ELECTRIC HATCH ENGINE ROOM BLOWER ENGINE ROOM LIGHTS FAN FISH FINDER FISHING LIGHT FISHWELL PLIME FLOOD LIGHTS FRESH WATER PUMP FUEL PUMP GALLEY OUTLETS GAS ALARM GPS/PLOTTER HEAD IGNITION INSTRUMENT LIGHTS LIGHTS LIVEWELL MACERATOR PUMP NAV LIGHT ANCHOR-OFF-NAV OUTLETS PUMPOUT RADIO SEAWATER WASH DOWN SHOWER SUMP PUMP SSB STERN LIGHT STROBE LIGHT TRICOLOR LIGHT TROLLING MOTOR WASHDOWN WATER MAKER

WINCHES

WIPER PORT

4207 and 8039 (BLANK) 12 VOLT DC 12 VOLT DC OUTLETS AFT CABIN AFT HEAD ALARM SYSTEM ANCHOR WASH DOWN BAIT PUMP BILGE ALARM BILGE PUMP 2 BRIDGE INSTRUMENTS CABIN 2 LIGHTS CABIN 3 LIGHTS CABIN 4 LIGHTS CABIN FANS CABIN LIGHTS CB RADIO CELLULAR PHONE CHART LIGHT CHART PLOTTER COCKPIT LIGHTS COLOR SOLINDER COMM ELECTRONICS DC LIGHTS DC MAIN DC OUTLETS DC REFRIGERATOR DC SUB PANEL **DECK LIGHTS** DECK LIGHTS AFT

DECK LIGHTS FWD DEPTH RECORDER DEPTH/SPEED DESALINATOR DIMMER DINING AREA LIGHTS DOCKING LIGHTS
EMERGENCY LIGHTS
ENGINE ROOM BILGE ALARM ENGINE ROOM LIGHTS ENGINE ROOM PANEL MAIN ENGINE ALARM EXTERIOR LIGHTS FIRE ALARM FISHING LIGHT FLOOD LIGHTS FLYBRIDGE FLECTRONICS FLYBRIDGE LIGHTS FRESH WATER PUMP FRESH WATER WASH DOWN GALLEY LIGHTS GPS/PLOTTER HAII FR HAM RADIO HFAD HEAD LIGHTS HEAD LIGHTS 2 **HEATER 2** HELM ELECTRONICS

HELM GAUGES HELM INSTRUMENTS HIGH WATER ALARM HOLDING TANK HOLDING TANK ALARM HOLDING TANK PUMP **INSTRUMENT LIGHTS** INSTRUMENTS INTERCOM INTERIOR LIGHTS LIGHTS 2 LIVEWELL LOG LORAN MAIN CABIN MAP LIGHT MAST LIGHTS NAV STATION FLECTRONICS NAV STATION GAUGES NAV STATION INSTRUMENTS NAV STATION LIGHTS NAVIGATION FLECTRONICS NAVIGATION INSTRUMENTS NAVIGATION LIGHTS RACK LIGHTS RADIO SALOON SALOON LIGHTS SAT/COM SAT/NAV

NAVIGATION INSTRUMENTS

NAV LIGHT ANCHOR OFF NAV

SATELLITE DISH SEARCHLIGHT SEAWATER TEMP SEAWATER WASH DOWN SECURITY SYSTEM SHOWER SUMP PUMP SONAR SPEED/LOG SSB SUB PANEL SUMP PUMP TELEPHONE SYSTEM TRACK LIGHTS TRANSFER PUMP TRIM TABS TV/VCR UTILITY VIDEO PLOTTER WATER ALARM WATER MAKER WATER PLIMP WEATHER FAX WEATHER INSTRUMENT WINCHES WIND INSTRUMENTS WINDEX LIGHT WIPER PORT WIPER STBD

4208 and 8067

(BLANK) CARIN HEATER 120 VOLT AC OUTLETS CABIN LIGHTS 120 VOLTS AC / 60 HZ AC COMPRESSOR CHARGER/INVERTER COCKPIT LIGHTS COCKPIT REFRIGERATOR
COMPARTMENT LIGHT AC FAN AC MAIN COOKTOP DECK LIGHTS AC PANEL AC POWER AC REFRIGERATOR AC SUB PANEL DIMMER
DINING AREA LIGHTS DINING AREA OUTLETS AFT CABIN AFT HEAD DISHWASHER AIR CONDITIONER 3 DISPOSAL AIR CONDITIONER 4 DRYFR ALARM SYSTEM EMERGENCY LIGHTS AMPLIFIER ENGINE ROOM LIGHTS ENGINE ROOM OUTLETS AUDIO/VIDEO SYSTEM BATTERY CHARGER 2 BRIDGE LIGHTS EXHAUST FAN EXTERIOR LIGHTS BRIDGE OUTLETS FAN FAN 2 CABIN CABIN 2 LIGHTS CABIN 2 OUTLETS FAN 4 FLOOD LIGHTS CARIN 3 FRFF7FR CABIN 3 LIGHTS FURNACE GALLEY APPLIANCES CABIN 3 OUTLETS GALLEY LIGHTS CABIN 4 CABIN 4 LIGHTS
CABIN 4 OUTLETS GARBAGE DISPOSAL GENERATOR 1

GELOUTLET HALLWAY LIGHTS HEAD 2 OUTLETS HEAD 3 OUTLETS **HEAD 4 OUTLETS** HEAD LIGHTS HEAD LIGHTS 2 HEAD LIGHTS 3 HEAD LIGHTS 4 HEAD OUTLETS **HEADLIGHTS** HFATER 2 HEATER 3 HEATER 4 HOOD FAN ICEMAKER INTERIOR LIGHTS INVERTER OUTLET ISOLATION TRANSFORMER LAZARETTE LIGHTS LECTRASAN LIGHTS 3 LIGHTS AFT LIGHTS FWD MAIN MAIN BREAKER MAIN CABIN NAV STATION LIGHTS

OUTLETS 2 **OUTLETS 3 OUTLETS 4 OUTLETS DECK** OUTLETS EXTERIOR OUTLETS INTERIOR RACK OUTLETS RANGE REFRIGERATOR/FREEZER REVERSE POLARITY SALOON SALOON HEATER SALOON LIGHTS SALOON OUTLETS SATELLITE DISH SHIP SHORE SHORE POWER STEREO STOVE/MICROWAVE SUB PANEL TELEPHONE SYSTEM TRACK LIGHTS TRASH COMPACTOR TV UPS SYSTEM VACUUM VIDEO SYSTEM WASHER WATER MAKER

included with **Source Selection Panels**

WIPERS

Label set

(not sold separately)

Blank WRITE-ON INVERTER SHORE SHORE 1 SHORE 2 AC BUS 1 AC BUS 2 GENERATOR GENERATOR 1 **GENERATOR 2**



Individual Square and Large Format Panel LabelsTo order individual labels, please indicate the Part No. (6520 or 8063) and the Label No.

Label PN	Label Text	Label PN	Label Text	Label PN	Label Text	Label PN	Label Text
0001	LABEL #1	0485	BEDROOM SLIDEOUT	0125	DECK LIGHTS AFT	0189	FISHING LIGHT
0002	LABEL #2	0055	BILGE	0126	DECK LIGHTS FWD	0487	FISHWELL PUMP
0003	(BLANK)	0056	BILGE ALARM	0127	DECK LIGHTS PORT	0488	FISHWELL PUMP 2
0005 0004	12 VOLT DC 12 VOLT DC OUTLETS	0057 0058	BILGE ALARM 2 BILGE ALARM 3	0128 0129	DECK LIGHTS STBD DEFROSTER	0576 0190	FLOAT SWITCH FLOOD LIGHTS
0499	12 VOLT OUTLETS INSIDE	0059	BILGE ALARM 4	0129	DEPTH RECORDER	0190	FLOSCAN
0500	12 VOLT OUTLETS OUTSIDE	0060	BILGE LIGHTS	0131	DEPTH SOUNDER	0192	FLYBRIDGE
0502	120 VOLT / 60 HZ SHORE POWER	0061	BILGE PUMP	0132	DEPTH/SPEED	0193	FLYBRIDGE ELECTRONICS
0007	120 VOLT AC / 60 HZ	0062	BILGE PUMP 2	0133	DESALINATOR	0194	FLYBRIDGE LIGHTS
0006	120 VOLT AC OUTLETS	0063	BILGE PUMP 3	0134	DIMMER	0195	FLYBRIDGE OUTLETS
0516	120/240V 60 HZ	0064	BILGE PUMP 4	0135	DINING AREA LIGHTS	0196	FOG LIGHTS
0517	120/240V 60 HZ SHORE POWER	0453	BILGE PUMP ON-OFF-AUTO	0136	DINING AREA OUTLETS	0197	FOREDECK LIGHT
0526	230 VOLTS AC 50 HZ	0559	BLANK WHITE WRITABLE	0137	DISCHARGE PUMP	0539	FORWARD BILGE
0010	24 VOLT DC	0065 0066	BLOWER	0567 0568	DISCHARGE PUMP 2 DISCHARGE PUMP 3	0198 0199	FREEZER FRESH WATER
0009	24 VOLT DC OUTLET 240 VOLTS AC	0067	BOAT DAVIT BOOM LIGHT	0138	DISHWASHER	0200	FRESH WATER PUMP
0460	240 VOLTS AC / 60 HZ	0068	BOW LIGHT	0139	DISPOSAL	0200	FRESH WATER PUMP 2
0515	250 VOLT 50HZ SHORE POWER	0069	BOW THRUSTER	0140	DIVE COMPRESSOR	0202	FRESH WATER PUMP 3
0468	250 VOLTS AC / 50 HZ	0070	BRIDGE	0141	DOCKING LIGHT PORT	0203	FRESH WATER PUMP 4
0462	AC BUS 1	0071	BRIDGE INSTRUMENTS	0142	DOCKING LIGHT STBD	0204	FRESH WATER WASH DOWN
0011	AC COMPRESSOR	0072	BRIDGE LIGHTS	0143	DOCKING LIGHTS	0482	FRONT SLIDEOUT
0012	AC FAN	0073	BRIDGE OUTLETS	0144	DOWN RIGGER	0561	FUEL GAUGE
0013	AC MAIN	0074	CABIN	0145	DRYER	0205	FUEL PRIMER PUMP
0014	AC PANEL	0075	CABIN 2	0146	DUMP VALVES	0206	FUEL PUMP
0015 0016	AC POWER AC REFRIGERATOR	0501 0076	CABIN 2 FAN CABIN 2 LIGHTS	0566 0580	ECU ELCI	0207 0208	FUEL PUMP 2 FUEL PUMP 3
0018	AC SUB PANEL	0078	CABIN 2 OUTLETS	0147	ELECTRIC HATCH	0208	FUEL PUMP 4
0532	ACCENT LIGHT	0078	CABIN 3	0469	ELECTRONIC CONTROL UNIT	0210	FUEL TANK HEATER
0018	ACCESSORY	0079	CABIN 3 LIGHTS	0148	ELECTRONICS	0211	FUEL TRANSFER
0019	ADF	0800	CABIN 3 OUTLETS	0149	EMERGENCY BACKUP SYS	0507	FUME DETECTOR
0020	AERATOR	0081	CABIN 4	0150	EMERGENCY LIGHTS	0212	FURLER JIB
0021	AFT CABIN	0082	CABIN 4 LIGHTS	0151	EMERGENCY PUMPS	0213	FURLER MAINSAIL
0022	AFT CABIN LIGHTS	0083	CABIN 4 OUTLETS	0545	ENGINE	0214	FURLER SPINNAKER
0023	AFT CABIN OUTLETS	0084	CABIN FAN	0581	ENGINE 1	0215	FURNACE
0536	AFT CABIN SUMP	0085	CABIN HEATER	0582	ENGINE 2	0216	FWD CABIN
0530 0024	AFT DISCHARGE PUMP AFT HEAD	0086 0087	CABIN LIGHTS CABIN OUTLETS	0547 0158	ENG 1/ENG 2 ENGINE ALARM	0217 0218	FWD CABIN LIGHTS FWD CABIN OUTLETS
0024	AIR COMPRESSOR	0087	CABLEMASTER	0158	ENGINE BLOCK HEATER	0529	FWD DISCHARGE PUMP
0026	AIR CONDITIONER	0089	CASSETTE PLAYER	0160	ENGINE CONTROL PORT	0528	FWD HEAD
0027	AIR CONDITIONER 2	0090	CB RADIO	0161	ENGINE CONTROL STBD	0219	GALLEY
0028	AIR CONDITIONER 3	0091	CCTV	0162	ENGINE CONTROLS	0220	GALLEY APPLIANCES
0029	AIR CONDITIONER 4	0092	CD PLAYER	0163	ENGINE DRIVEN REFRIG	0221	GALLEY DRAIN
0030	AIR CONDITIONER PUMP	0093	CELLULAR PHONE	0164	ENGINE EXHAUST FAN	0222	GALLEY FAN
0031	AIR HORN	0537	CENTER LIVEWELL	0165	ENGINE HATCH	0223	GALLEY LIGHTS
0573	ALARM	0094	CHARGER/INVERTER	0166	ENGINE HEATER STRD	0224	GALVANIC ISOLATOR
0544 0032	ALARM ALARM SYSTEM	0095 0096	CHART LIGHT CHART PLOTTER	0167 0168	ENGINE HEATER STBD ENGINE INSTRUMENTS	0490 0225	GALVANIC ISOLATOR GARBAGE DISPOSAL
0461	ALTERNATOR	0097	CHOKE	0169	ENGINE OIL PAN PUMP	0225	GAS ALARM
0033	ALTERNATOR DISCONNECT	0098	CIRCULATOR PUMP	0152	ENGINE ROOM BILGE ALARM	0227	GENERAL PURPOSE
0034	AMPLIFIER	0508	CLOCK	0153	ENGINE ROOM BLOWER	0523	GENERATOR
0035	ANCHOR LIGHT	0099	CLOSET LIGHT	0154	ENGINE ROOM HEATER	0228	GENERATOR 1
0036	ANCHOR LIGHT MAIN	0575	CO DETECTOR	0155	ENGINE ROOM LIGHTS	0229	GENERATOR 2
0037	ANCHOR LIGHT MIZZEN	0100	COCKPIT LIGHTS	0156	ENGINE ROOM OUTLETS	0454	GENERATOR OFF ON START
0038	ANCHOR WASH DOWN	0101	COCKPIT REFRIG	0157	ENGINE ROOM PANEL MAIN	0230	GENERATOR ROOM BLOWER
0039	APPLIANCES	0102	COLOR SOUNDER	0170	ENGINE TEMP	0466	GENERATOR RUNNING
0040 0041	ARCH LIGHTS AUDIO/VIDEO SYSTEM	0103 0104	COMM ELECTRONICS COMPARTMENT HEATER	0171 0546	ENGINE TEMP ENGINES	0455 0578	GENERATOR STOP GFCI
0525	AUTO FILL	0104	COMPARTMENT LIGHT	0172	ENTERTAINMENT CENTER	0231	GFI OUTLET
0042	AUTO/MANUAL	0106	COMPASS LIGHT	0173	ENTRANCE DOOR	0232	GPS
0555	AUTO/MAN	0107	COMPUTER	0174	ENTRY STEP	0233	GPS/LORAN
0524	AUTOMATIC CHARGING RELAY	0514	COMPUTER DISPLAY	0175	EXHAUST FAN	0234	GPS/PLOTTER
0043	AUTOPILOT	0108	CONDENSER PUMP	0176	EXHAUST TEMP	0510	GUN LOCKS
0044	BAIT PUMP	0109	CONSOLE LIGHT	0177	EXTERIOR	0235	
0045	BALLAST CONTROLS	0110	CONVERTER	0178	EXTERIOR LIGHTS	0236	HALLMAYLIGHTS
0046 0047	BALLAST CONTROLS BALLAST PUMP	0111 0112	COOKING GRILL COOKTOP	0179 0180	FAN 2	0237 0238	HALLWAY LIGHTS HALON FIRE SYSTEM
0047	BAR	0112	COOLING PUMP	0180	FAN 3	0238	HAM RADIO
0481	BATHROOM	0113	COURTESY LIGHTS	0181	FAN 4	0239	HEAD
0049	BATTERY	0115	CREW LIGHTS	0183	FAX	0241	HEAD 2
0473	BATTERY 1	0116	CREW QUARTERS	0184	FILLING PUMP	0242	HEAD 2 FAN
0474	BATTERY 2	0117	DAVIT	0185	FIRE ALARM	0243	HEAD 2 OUTLETS
0050	BATTERY CHARGER	0118	DC LIGHTS	0186	FIRE EXT	0244	HEAD 3
0051	BATTERY CHARGER 2	0119	DC MAIN	0187	FIRE HORN	0245	HEAD 3 FAN
0052	BATTERY COMPARTMENT	0120	DC OUTLETS	0459	FISH FINDER	0246	HEAD 3 OUTLETS
0053	BATTERY PARALLEL	0121	DC REFRIGERATOR	0538	FISHBOX DRAIN	0247	HEAD 4 EAN
0560 0054	BATTERY SWITCH BEACON	0122 0123	DC SUB PANEL DECK	0188 0520	FISHBOX ICEMAKER FISHBOX PUMP	0248 0249	HEAD 4 FAN HEAD 4 OUTLETS
0480	BEDROOM	0123	DECK LIGHTS	0520	FISHBOX REFRIGERATOR	0249	HEAD FAN
00		3.2.	- :=:=:::=	3321		3233	



Example:

Square Format 6520-0044



Large Format 8063-0356

REFRIGERATOR

Label PN	Label Text	Label PN	Label Text	Label PN	Label Text
0251	HEAD LIGHTS	0311	MAIN CABIN	0367	SALOON LIGHTS
0252	HEAD LIGHTS 2	0312	MAIN CABIN LIGHTS	0368	SALOON OUTLETS
0253	HEAD LIGHTS 3	0313	MAIN CABIN OUTLETS	0369	SALT WATER PUMP
0254	HEAD LIGHTS 4	0314	MAIN SAIL FURLING	0370	SAT/COM
0255	HEAD OUTLETS	0315	MAP LIGHT	0371	SAT/NAV
0256	HEADLIGHTS	0572	MARINE SANITATION DEVICE	0372	SATELLITE DISH
0257	HEATER	0316	MAST LIGHTS	0373	SCRUBBER
0519	HEATER & AIR CONDITIONER	0317	MASTHEAD LIGHT	0374	SEARCHLIGHT
0258	HEATER 2	0551	MEMORY	0375	SEARCHLIGHT HAND HELD
0259	HEATER 3	0574	MERCATHODE	0376	SEARCHLIGHT REMOTE
0260	HEATER 4	0318	MICROWAVE	0377	SEAWATER TEMP
0261	HELM ELECTRONICS	0319	MINI DISC PLAYER	0378	SEAWATER WASH DOWN
0262	HELM GAUGES	0320	MIZZEN FLOOD	0379	SECURITY SYSTEM
0263	HELM INSTRUMENTS	0456	NAV LIGHT ANCHOR OFF NAV	0380	SHIP
0264	HIGH WATER ALARM	0321	NAV STATION ELECTRONICS	0381	SHORE
0265	HOLDING TANK	0322	NAV STATION GAUGES	0463	SHORE 1
0266	HOLDING TANK ALARM	0323	NAV STATION INSTRUMENTS	0464	SHORE 2
0267	HOLDING TANK PUMP	0324	NAV STATION LIGHTS	0382	SHORE CORD REEL
0268	HOOD FAN	0325	NAVIGATION ELECTRONICS	0383	SHORE POWER
0269	HOOD LIGHT	0326	NAVIGATION INSTRUMENTS	0384	SHORE POWER CORD
0270	HORN	0327	NAVIGATION LIGHTS	0385	SHOWER SUMP PUMP
0475	HOT TUB	0565	NETWORK	0386	SINK DRAIN
0271	HOT WATER PUMP	0328	NIGHT LIGHTS	0486	SLIDEOUT
0548	HOUSE	0329	OFF	0387	SOLAR PANEL
0549	HOUSE/ENG	0331	OIL CHANGE PUMP	0388	SONAR
0550	HOUSE/GEN	0563	OIL GAUGE	0542	SONAR/ACC
0272	HYDRAULIC ALARM	0332	ON	0389	SPARE
0273	HYDRAULIC SYSTEM	0330	ON-OFF	0390	SPEED/LOG
0274	HYDRAULIC TANK ALARM	0333	OUTLETS	0391	SPREADER LIGHTS
0570	HYDRAULIC VALVE	0334	OUTLETS 2	0392	SPREADER LT MIZZEN
0275	ICE MAKER	0335	OUTLETS 3	0393	SSB
0276	IGNITION	0336	OUTLETS 4	0394	STABILIZER
0277	IGNITION PORT	0505	OUTLETS AFT	0558	STAIR LIGHT
0278	IGNITION STBD	0337	OUTLETS DECK	0395	STARBOARD
0279	INSTRUMENT LIGHTS	0506	OUTLETS ENGINE ROOM	0396	START
0280	INSTRUMENTS	0338	OUTLETS EXTERIOR	0398	START PORT
0281	INTERCOM	0503	OUTLETS FORWARD	0399	START STBD
0282	INTERCOM HAILER	0339	OUTLETS INTERIOR	0397	START-STOP
0283	INTERCOM/TELEPHONE	0504	OUTLETS PILOT HOUSE	0541	STBD FISHBOX
0284	INTERIOR LIGHTS	0458	PANEL LIGHTS	0533	STBD LIVEWELL
0556	INTERNET	0496	PILOT HOUSE FAN	0400	STBD THRUSTER
0285 0467	INVERTER	0340 0540	PORT	0401 0569	STEAMING LIGHT
0467	INVERTER 2 INVERTER AC BUS	0540	PORT FISHBOX PORT LIVEWELL	0402	STEERING VALVE STEP LIGHT
0476	INVERTER AC BUS	0341	PORT THRUSTER	0402	STEREO
0470	INVERTER AC SUPPLY	0552	PORT/STBD ENG	0403	STEREO MEMORY
0286	INVERTER DC 30FFLT	0332	POWER	0404	STERN LIGHT
0287	ISOLATION TRANSFORMER	0342	POWER WASHER	0509	STERN THRUSTER
0479	KITCHEN	0343	PRE-HEAT	0405	STOP
0484	KITCHEN KITCHEN SLIDEOUT	0437	PRIMARY WINCHES	0405	STOVE
288	KNOTMETER	0345	PRINTER	0407	STOVE/MICROWAVE
)289	LAZARETTE LIGHTS	0345	PUMP	0407	STROBE LIGHT
290	LECTRASAN	0497	PUMP BLACK WATER	0408	SUB PANEL
)290	LIGHTER	0497	PUMP GRAY WATER	0409	SUMP PUMP
292	LIGHTS	0554	PUMPOUT	0410	SUMP PUMP 2
293	LIGHTS 2	0334	RACK LIGHTS	0411	SYNCHRO
294	LIGHTS 3	0347	RACK OUTLETS	0564	TANK GAUGE
295	LIGHTS 4	0348	RADAR	0413	TAPE DECK
296	LIGHTS AFT	0350	RADAR ARCH LIGHTS	0414	TELEPHONE SYSTEM
)494	LIGHTS AFT CABIN	0350	RADIO	0415	TEST
297	LIGHTS FWD	0352	RANGE	0416	TOWING LIGHTS
)493	LIGHTS MASTER CABIN	0579	RCBO	0417	TRACK LIGHTS
)495	LIGHTS PANTRY	0353	RDF	0465	TRANSFER
)492	LIGHTS PILOTHOUSE	0483	REAR SLIDEOUT	0418	TRANSFER PUMP
298	LIGHTS PORT	0354	RECEIVER	0419	TRANSFORMER
)491	LIGHTS SETTEE	0355	RECEPTACLE	0518	TRANSFORMER SECONDARY
299	LIGHTS STBD	0356	REFRIGERATOR	0420	TRASH COMPACTOR
300	LIVEWELL	0357	REFRIGERATOR PUMP	0478	TRAVEL LOCKS
301	LIVEWELL INPUT	0358	REFRIGERATOR/FREEZER	0421	TRICOLOR LIGHT
0302	LIVEWELL OUTPUT	0359	REGULATOR	0422	TRIM TABS
303	LOCKER LIGHTS	0360	REVERSE POLARITY	0527	TROLLING MOTOR
304	LOG	0361	ROD LOCKER	0423	TV
305	LORAN	0489	RUDDER ANGLE INDICATOR	0424	TV ANTENNA
0306	LPG CONTROL	0362	RUNNING LIGHTS	0425	TV/STEREO
0307	LUBE OIL PUMP	0363	SAILING CONTROLS	0426	TV/VCR
0308	MACERATOR PUMP	0364	SAILING INSTRUMENTS	0535	UNDERWATER LIGHT
	MAIN	0365	SALOON	0427	UPS SYSTEM
0309					

Label	Label Text
PN	
0429	VACUUM
0430	VACUUM PUMP
0431	VCR
0432	VHF
0511	VHF 1
0512	VHF 2
0433	VIDEO PLOTTER
0434	VIDEO SYSTEM
0543	WASHDOWN
0513	WASHDOWN PUMP
0435	WASHER
0436	WASHER/DRYER
0437	WATER ALARM
0562	WATER GAUGE
0438	WATER HEATER
0439	WATER LEVEL
0440	WATER MAKER
0441	WATER PRESSURE
0442	WATER PUMP
0443	WEATHER FAX
0444	WEATHER INSTRUMENT
0571	WIFI
0553	WINCH
0445	WINCHES
0477	WIND GENERATOR
0446	WIND INSTRUMENTS
0522	WIND SHIELD VENT
0447	WINDEX LIGHT
0448	WINDLASS
0449	WINDSHIELD WASHER
0472	WIPER CENTER
0450	WIPER PORT
0451	WIPER STBD
0452	WIPERS
0557	WIRELESS




Emergency Vehicle Label Set

For emergency vehicles

- 180 Reinforced, waterproof labels
- · Used on all ST-Blade Fuse Blocks

PN	Color	Quantity
7870	Black	180 Labels



Related Products




ST-Blade Fuse Blocks pages 58-63

Circuit Identification Label Kit

Used on Blue Sea Systems Battery Switches

- · Reinforced, waterproof labels
- Used on M-Series, €-Series, and HD-Series Battery Switches (p. 26)

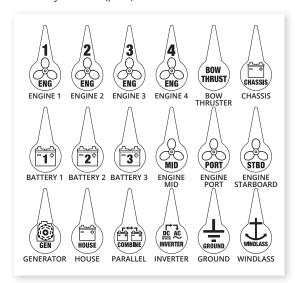

PN	Description
7902	Circuit Identification Label Kit

Labels Included

Labels IIIC	luueu
ON/OFF	FLASH LIG
12V SOCKET	FLOOD
12V SOCKET 1	FOG
12V SOCKET 2	FRONT
A/H	FRONT CL
AIR COMP	FRONT FL
AIR HORN	FRONT FL
AIREL	FRONT ILS
ALARM	FRONT LT
ALLEY LIGHTS	FRONT OS
ALPR	FRONT RO
AMBER	FRONT ST
AMP METER	GREEN
AREA	GRILL
AUX	GUN LOCI
AUX 1	HAND-HE
AUX 2	HAZARD
AUX 3	HEADLT F
BACK UP	HEAT
BLUE	HEAT/AC
BOX	HEAT/AC S
BRAKE	HI-IDL
CAB	HI-LOW
CABINET LIGHTS	HORN
CAMERA 1	HORN 1
CAMERA 2	HORN SIR
CENTER	IGN RELA
CLEAR	INFRARED
COMPUTER	INTER
COOL	JOG
CORNER	JOG LEFT
CORNER STROBE	JOG RIGH
CRUISE	LED
DECK	LED 1
DIM	LED 2
DIRECTNL ARROW	LED 3
DOME	LED 4
DOME HI/LOW	LEFT
DOME LIGHT	LEFT ALLE
DOOR	LEFT ARRO
EMERG	LEFT DOM
EXHAUST VENT	LEFT FLOO
FAN HI/LOW	LEFT SCEN

FAST

FLASH

lueu
FLASH LIGHT
FLOOD
FOG
FRONT
FRONT CUT
FRONT FLASH
FRONT FLOOD
FRONT ILS
FRONT LT BAR
FRONT OSC
FRONT ROT
FRONT STROBE
GREEN
GRILL
GUN LOCK
HAND-HELD
HAZARD
HEADLT FLASH
HEAT
HEAT/AC ON/OFF
HEAT/AC SELECT
HI-IDL
HI-LOW
HORN
HORN 1
HORN SIREN
IGN RELAY
INFRARED
INTER
JOG
JOG LEFT
JOG RIGHT
LED
LED 1
LED 2
LED 3
LED 4
LEFT
LEFT ALLEY
LEFT ARROW LEFT DOME
LEFT FLOOD
LEFT SCENE
LEFT SCEINE

LIGHT

LIGHT 1

LIGHT 2
LOAD SHED
LOCK
LOW POWER
LOWER
LVD
MAN
MAP LIGHT
MDC
MESSAGE BOARD
MODEM
MONITOR
MONITOR 1
MONITOR 2
OSC.
PA
PATIENT DOME
PERIMETER
PERIMETER 1
PERIMETER 2
PRIM
PRIORITY
PURSUIT
Q SIR
RADAR
RADIO
RADIO 1
RADIO 2
RADIO 3
RADIO S RADIO CHARGER
RAPID FLASH
REAR
REAR CUT
REAR FLASH
REAR FLOOD
REAR ILS
REAR OSC
REAR SCENE
REAR STROBE
RED
RELAY
RESET
RIGHT
RIGHT ALLEY
MIGHT ALLET

RIGHT ARROW

RIGHT DOME
RIGHT FLOOD
RIGHT SCENE
RISER
RMBLR
ROT
SCENE
SCENE LIGHT
SEARCH LIGHT
SEC
SIDE
SLOW SPEED
SM
SPOT
START STOP
STEP
STROBE
SUCTION ON/OFF
SURE EJECT
TAIL
TAKE DOWN
TAP II
TCL
TEMP METER
THERMAL CAMERA
TIMER
TONE
TOW
TRAFFIC
TRUNK
UPPER
USB
USB 1
USB 2
USB 3
VIDEO
VIDEO CAMERA
VOLT METER
WAIL
WARN
WARNING
WHT LT CUT
WIG WAG
WORK
YELP
ILLI



Protect Your Boat

with the correct size wire and fuse



1. Choose the Correct Wire

a) Locate the CURRENT FLOW IN AMPS of your circuit

b) Select the CIRCUIT TYPE

- Non-critical circuits with 10% allowable voltage drop include: general lighting, windlasses, bait pumps, general appliances
- Critical circuits with 3% allowable voltage drop include: panel main feeders, bilge blowers, electronics, navigation lights

c) Find the CIRCUIT LENGTH


The circuit length is the length of the negative wire added to the length of the positive wire.


Calculations are based on 105°C wire. For wire rated at 90°C or lower, or for wire that passes through an engine room, the first row of the chart does not apply.

d) Intersect the CURRENT FLOW IN AMPS with CIRCUIT LENGTH to identify the correct wire size Example: A windlass rated 80A is 25 ft. from the battery. The circuit length is the total length of the positive and negative wire added together, which in this example is 50 ft. The circuit type is 'non-critical', and the correct wire size is 4 AWG.

Calculations are based on 105°C wire. For more detailed calculations, download the Circuit Wizard app or go to circuitwizard.bluesea.com

WIRE SELECTION CHART

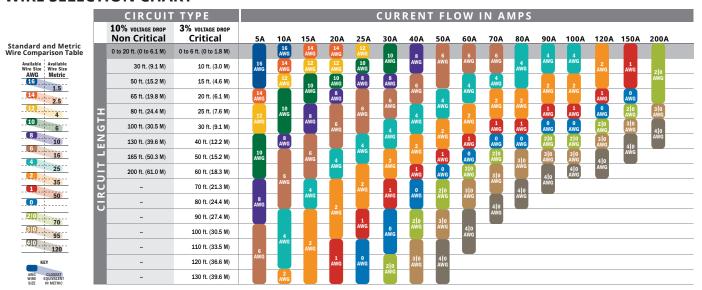

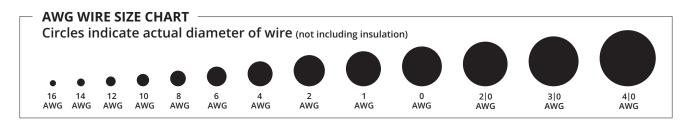

Although this process uses information from ABYC E-11 to recommend wire size and circuit protection, it may not cover all of the unique characteristics that may exist on a boat. If you have specific questions about your installation please consult an ABYC certified installer.



2. Choose the Correct Fuse and Fuse Amperage

- a) Choose a fuse type by following the line of the AWG WIRE SIZE determined from the Wire Selection Chart Appropriate fuses will have an amperage that intersects the AWG Wire Size line.
- b) The appropriate fuse amperage will be found in one of the four gray bars below the fuse type
 - Single Wire, Outside Engine Room = First column dark gray bar
 - Single Wire, Inside Engine Room = First column light gray bar
 - Bundled Wire, Outside Engine Room = Second column dark gray bar
 - Bundled Wire, Inside Engine Room = Second column light gray bar

Example: For a 4 AWG single 105°C rated wire outside an engine room, the maximum fuse amperage is 150A.

Note:

Possible fuse amperages for a circuit can fall between a range of maximum and minimum fuse amperages. The procedure in step 1 calculates the maximum fuse amperage which reduces nuisance blows but may offer less protection than a lower amperage fuse.


The minimum fuse amperage is calculated by multiplying the current flow in amps by 125%.

If the product instructions specify a fuse amperage, use that value if it is under the maximum amperage found in the step 1 procedure. If the specified fuse amperage is over the maximum suggested, move down the column and choose the wire size that intersects with the specified fuse amperage.

Calculations are based on 105°C wire. For more detailed calculations, download the Circuit Wizard app or go to circuitwizard.bluesea.com

FUSE SELECTION CHART

E	E N D utside ngine oom	AGC [®]		ATO® or ATC Fuse	®	MAXI [©] Fuse		AMI® or MIDI Fuse		MRBF TERMINA Fuse	r 🔘	MEGA or AMO Fuse		CLASS Fuse	T	CLASS Fuse	S T	ANL® Fuse	
E	nside ngine	.25A 1	to 30A	1A to	30A	30A t	A08 o:	30A to	200A	30A to	300A	100A t	o 300A	110A t	o 200A	225A 1	o 400A	35A to	400A
K	oom	SINGLE WIRE	BUNDLED WIRES	SINGLE WIRE	BUNDLED WIRES	SINGLE WIRE	BUNDLED WIRES	SINGLE WIRE	BUNDLED WIRES	SINGLE WIRE	BUNDLED WIRES	SINGLE WIRE	BUNDLED WIRES	SINGLE WIRE	BUNDLED WIRES	SINGLE WIRE	BUNDLED WIRES	SINGLE WIRE	BUNDLED WIRES
	16 AWG	25A 20A	20A 15A	25A 20A	20A 15A												_		
	14 AWG	30A	25A 20A	30A	25A 20A	30A 30A		30A 30A		30A 30A									
	12 AWG		30A 25A		30A 25A	50A 40A	30A	50A 40A	30A	50A 40A	30A							35A	
ш	10 AWG					60A 50A	40A 40A	60A 50A	40A 40A	60A 50A	40A 40A							50A 40A	40A - 35A -
12	8 AWG					80A 70A	60A 50A	80A 70A	60A 50A	80A 70A	60A 50A						_	80A 60A	50A 40A
S	6 AWG						80A 70A	125A 100A	80A 70A	125A 100A	80A 70A	125A 100A		125A 100A				130A 100A	70A 60A
2	4 AWG							150A 125A	125A 100A	150A 125A	125A 100A	150A 125A	125A 100A	175A 150A	110A			150A 130A	100A 80A
=	2 AWG							200A 175A	150A 125A	200A 175A	150A 125A	200A 175A	150A 125A	200A 175A	150A 125A			200A 175A	150A 130A
5	1 AWG							200A	175A 150A	250A 200A	175A 150A	250A 200A	175A-150A	200A	175A 150A	250A		250A 200A	-175A -150A -
≥	0 AWG								200A 175A	300A 250 A	200A 175A	300A-250A	200A 175A		200A 175A	300A 250 A		300A 250A	200A 175A
⋖	2 0 AWG									300A	225A 200A	300A	225A 200A		200A	350A 300A	225A	350A 300A	225A 200A
	3 0 AWG										250A 225A		250A 225A			400A 350A	250A 225A	400A 350A	250A 225A
	4 0 AWG										300A 250A		300A 250A			400A 400A	300A 250A	400A 400A	300A 250A

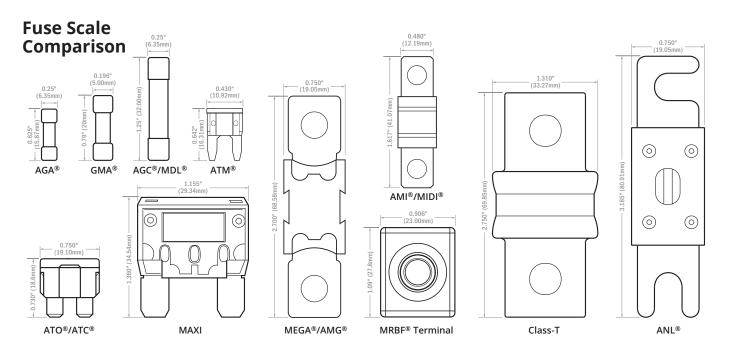

3. Choose the Fuse Holder

- a) Using the fuse type chosen from the Fuse Selection Chart, follow the column down to find fuse holders or fuse blocks that meet your specific requirements
- b) Consider environmental factors:
- Ignition protection is required where flammable vapors may accumulate
 Example: Engine room and propane locker

 Consult American Boat and Yacht Council (ABYC) E-11.5.3 for Ignition Protection
- Ingress protection protects fuses from spray, washdown, and humidity. IP66-protected against powerful water jets
- c) Decide between an in-line fuse holder or a fuse block:
 - In-line fuse holders are compact and hold a single low-amperage fuse
 - Fuse blocks mount to a solid surface and may hold a single fuse or multiple fuses

FUSE HOLDER SELECTION CHART





Battery Management Wiring Schematics for Typical **Applications**


Batteries are at the heart of the electrical system found on any boat or vehicle. Proper battery management, including switching and charging, is essential for safe and reliable operation. The following wiring diagrams show how batteries, battery switches, and Automatic Charging Relays are wired together from a simple 1 battery - 1 engine configuration to a 4 battery - 2 engine - 1 generator system. For more detailed wiring guidelines please consult a qualified marine electrician or one of the many books available on the subject.

Note: The ACRs pictured are representative of any ACR. The battery switches are representative of any Battery Switch of the same model.

1 Battery - 1 Engine


Switches a single battery to a single load group.

ON-OFF Battery Switch



Saves battery power for starting.


1 ON-OFF Battery Switch



2 Battery - 1 Engine

Switches isolated battery banks to all loads or combines battery banks to all loads.

1 Selector Battery Switch




Note:

Uses same style batteries

Simultaneously switches two isolated battery banks or combines battery banks to all loads.

1 Dual Circuit Plus™ Battery Switch


1 Automatic Charging Relay



Can isolate a failed battery.

3 ON-OFF Battery Switches


1 Automatic Charging Relay



2 Battery - 2 Engine

House battery is shared with one engine. One engine battery is in reserve.

2 Selector Battery Switches



Normal - Set all switches to position 1


Parallel - Set all switches to position 1+2

Isolate - Set Load switch to position 2 and Source Switch to position 1+2

Engines share one battery. House battery is in reserve.

1 Dual Circuit Plus™ Battery Switch 1 Automatic Charging Relay


Can isolate a failed battery.



3 Battery - 2 Engine

Can isolate any battery source from any batteries.

- 3 Selector Battery Switches
- 2 Automatic Charging Relays

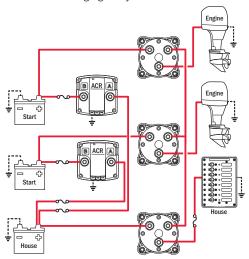


Normal - Set all switches to position 1 Parallel - Set all switches to position 1+2 Isolate - Set Load switch to position 2 and Source Switch to position 1+2

Can parallel batteries for extra starting power.


2 Dual Circuit Plus™ Battery Switches

2 Automatic Charging Relays

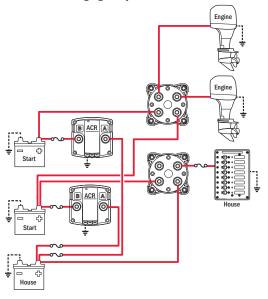


4 Battery - 2 Engine - 1 Generator

Can isolate any battery source from any batteries.

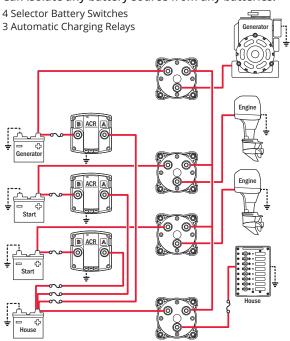

Normal - Set all switches to position 1
Parallel - Set all switches to position 1+2
Isolate - Set Load switch to position 2 and
Source Switch to position 1+2

Can parallel batteries for extra starting power.

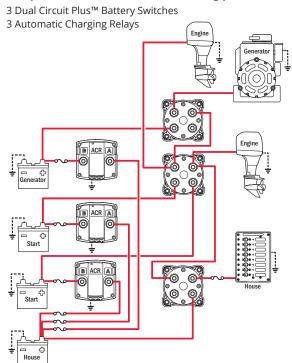

LEGEND



DC Main Circuit Protection and Branch Circuit Protection

Purpose

Fuses and circuit breakers are used to protect wire insulation from melting and starting fires in the event of overcurrents or short circuits which cause more amperage to flow in a wire than that wire is rated to carry. It is important to note that, except for those wires that are intended to carry starting currents, every positive wire in the DC Main Power Distribution System must be protected by a fuse or circuit breaker.

Considerations for DC Main Circuit Protection

Mounting Placement - distance from power source. The DC Main circuit protection system uses circuit breakers or fuses to protect the wires of the DC Main distribution system. The American Boat and Yacht Council (ABYC) publishes voluntary standards for the type and placement of the fuse or circuit breaker to be used as a DC Main circuit protection device. Wire intended to carry engine starting currents between the batteries, the switch, and the starter is not required to have main circuit protection devices installed. Maximum mounting placement dimensions for a fuse or circuit breaker are 7" if the conductor is not housed in a sheath or enclosure in addition to the wire insulation, 40" if the conductor is housed in a sheath or enclosure in addition to the wire insulation, and 72" if the conductor is connected directly to the battery and housed in a sheath or enclosure in addition to the wire insulation.

Selecting DC Main Circuit Protection

The principal attribute of a DC Main circuit protection device is its Ampere Interrupt Capacity (AIC) rating. Specifications listed in the ABYC standards determine the AIC a DC Main circuit protection device must have. The required AIC rating is determined by the <u>total</u> CCA of the batteries connected to the circuit. See the tables at right for the required AIC ratings.

Wire selection for DC applications on boats is usually based on voltage drop requirements. However, there is a maximum continuous current that the wire can withstand without overheating. Higher grade marine wires are rated for service up to 105°C (221°F)—the ABYC wire capacity table for 105°C is most frequently quoted. The 105°C table accurately reflects the capacity of single conductors exposed to freely circulating cooling air. However, other factors, such as covering bundles of wire in outer jackets to form a cable, or use of conduits or structural voids to protect wires, can reduce the cooling and reduce the safe capacity of the wire. A more conservative strategy is to use the 105°C wire, but treat it according to the 75°C table above when selecting circuit protection unless the wire is openly exposed for cooling.

See the Blue Sea Systems Circuit Wizard at circuitwizard.bluesea.com or pages 157-159 for more assistance with wire and circuit protection selection.

ABYC Interrupt Rating Table

Total Connected Battery Cold Cranking Amp	Ampere Interrupt Capacity							
12 VOLTS AN	ID 24 VOLTS							
The white boxes identify two batteries, of the samplaced in parallel configuration.	DC MAIN	DC BRANCH						
G24 OR G27	1,500 AIC	750 AIC						
G24 + G24 OR G27 + G27 OR 4D	651-1,100 CCA	3,000 AIC	1,500 AIC					
8D OR 4D + 4D	Over 1,100 CCA	5,000 AIC	2,500 AIC					
32 VOLTS								
	1,250 CCA or Less	3,000 AIC	1,500 AIC					

^{*} Battery cold cranking performance rating at -17.8°C (0°F): The discharge load in amps that a battery at -17.8°C (0°F) can deliver for 30 seconds, and maintain a voltage of 1.2 Volts per cell or higher, (e.g. 7.2 Volts for a 12 Volt battery).

The CCA for the battery icons in this chart is an approximation and could be slightly higher or lower. Consult the battery manufacturer's specifications for precise CCA ratings. A battery rated in MCA will have a CCA capacity approximately 80% of MCA

Over 1,250 CCA 5,000 AIC

ABYC E-11 requires the use of circuit breakers that can be reused and reset and that they be applied as per the table above. The standard does not strictly require that fuses be applied in the same way, but it is an issue to consider, especially with high amp fuses used to protect panel feeders or inverters. Fuses under 10 Amp rating generally have such a high internal resistance they prevent fault currents from reaching 1000 Amps in 12 Volt circuits.

The apparent contradiction when using these fuses for bilge pumps and other circuits directly off the battery is less of an issue than it might seem. If a fuse blows, and the case appears to be cracked or metal has been ejected, the fuse holder should be replaced.

ABYC Ampacity Rating Table at 30°C †

WIRI	SIZE		TEMP	ERAT	URE	RATII	NG O	F (COND	UCT	OR IN	ISULA	NOITA	ı		REF	ERENCE	DATA
Standard	Metric	75°C		90°C		105°	С		75°C	C 90°C		105°C				Ohms	Ohms	
AWG	mm²		Eng Rm		Eng Rm		Eng Rm			Eng Rm		Eng Rm		Eng Rm		mm dia	/1000ft	/1000m
	0.75	9.5	7	19	15.5	19	16		6.6	5.0	13	11	13	11		0.98	7.29	23.92
18	0.82	10	8	20	16	20	17		7	5	14	12	14	12		1.02	6.67	21.88
	1.0	13	10	21	17	21	18		9	7	15	12	15	13		1.13	5.47	17.94
16	1.3	15	11	25	21	25	21		11	8	18	14	18	15		1.29	4.17	13.70
	1.5	16	12	24	20	29	24		11	9	17	14	20	17		1.38	3.65	11.96
14	2.1	20	15	30	25	35	30		14	11	21	17	25	21		1.63	2.63	8.63
	2.5	21	16	34	28	38	32		15	11	23	19	26	22		1.78	2.19	7.18
12	3.3	25	19	40	33	45	38		18	13	28	23	32	27		2.05	1.65	5.42
	4.0	34	25	46	38	51	43		24	18	32	27	35	30		2.26	1.37	4.49
10	5.3	40	30	55	45	60	51		28	21	39	32	42	36		2.59	1.04	3.41
	6.0	53	40	57	47	65	55		37	28	40	33	45	39		2.76	0.91	2.99
8	8.4	65	49	70	57	80	68		46	34	49	40	56	48		3.27	0.65	2.14
	10.0	79	60	84	69	100	85		56	42	59	48	70	60		3.6	0.55	1.79
6	13.3	95	71	100	82	120	102		67	50	70	57	84	71		4.1	0.41	1.35
	16.0	105	79	113	93	134	114		73	55	79	65	94	80		4.5	0.34	1.12
4	21	125	94	135	111	160	136		88	66	95	78	112	95		5.2	0.26	0.85
	25	141	106	150	123	175	148		99	74	105	86	122	104		5.6	0.22	0.72
3	27	145	109	155	127	180	153		102	76	109	89	126	107		5.8	0.21	0.67
2	34	170	128	180	148	210	179		119	89	126	103	147	125		6.5	0.16	0.53
	35	173	130	186	153	217	185		121	91	130	107	152	129		6.7	0.16	0.51
1	42	195	146	210	172	245	208		137	102	147	121	172	146		7.3	0.13	0.42
	50	220	165	235	193	273	232		154	116	164	135	191	163		8.0	0.109	0.36
0	54	230	173	245	201	285	242		161	121	172	141	200	170		8.3	0.102	0.34
00	68	265	199	285	234	330	281		186	139	200	164	231	196		9.3	0.081	0.27
	70	274	206	292	239	341	289		192	144	204	168	238	203		9.4	0.078	0.26
000	85	310	233	330	271	385	327		217	163	231	189	270	229		10.4	0.064	0.21
	95	334	251	357	293	413	351		234	175	250	205	289	246		11.0	0.058	0.19
0000	107	360	270	385	316	445	378		252	189	270	221	312	265		11.7	0.051	0.17
	120	387	290	414	339	478	406		271	203	290	237	335	284		12.4	0.046	0.15
	150	445	333	476	390	550	467		311	233	333	273	385	327		13.8	0.036	0.12

Data based on E-11 Table VI-A (Single conductors in free air) (Up to three

Data based on E-11 Table VI-B

SAE conductors are smaller than equivalent AWG by 5% to 12% with current capacity typically less by 7%. ISO Ratings for metric wire are slightly less than these values derived from ABYC VI-A ratings.

- For bundles of 4 to 6 conductors multiply by 0.857
- For bundles of 7 to 24 conductors multiply by 0.714
- For bundles of 25 or more, conductors multiply by 0.571

Wires counted in bundles need not include:

- 1. Wires carrying intermittent currents no more than rating per VI-A and for less than one minute per mm of diameter, and not repeating more often than a delay of 5X times active duration.
- 2. Wires carrying load currents at less than 50% of the wire rating per table VI-B.

[†] Thermally limited amperage capacity


AC Main Power Distribution and Circuit Protection

Purpose

- Provide a path for delivering power from the ship's sources of AC power to the AC branch distribution system
- Provide a path for returning fault currents to ground via the green safety Ground wire
- Provide a means for disconnecting AC power when the boat is not in use or in emergencies
- Provide electrical separation to insure that two sources of AC power are never connected
- Provide circuit protection for neutral and line wires in the AC main system
- · Provide ground fault protection
- · Provide ELCI overload or leakage fault protection

AC Wire Systems

The three most common AC systems used on boats are shown here. In all cases the ground, sometimes called safety ground to clarify its purpose and differentiate it from the DC ground or negative, is said to be a "normally non-current carrying wire." Its purpose is to provide the lowest resistance path for AC currents that have strayed from their proper containment in the normally current carrying hot and neutral wires. The ground wire is connected to the exterior conductive parts of AC devices that could be touched by a person during normal operation, and it conducts errant AC currents safely to ground rather than passing them through a human body. The ground wire is never passed through a circuit breaker.

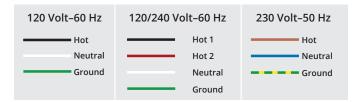


Devices Qualifying as AC Main Circuit Breakers


In order to qualify as an AC main circuit breaker, these characteristics must be present:


- The circuit breaker must have an Amperage Interrupt Capacity (AIC) meeting the requirements of the following tables.
- 2. The circuit breaker must be multiple pole, usually 2 or 3.
- 3. The circuit breaker must be rated for the appropriate AC system voltage in which it will be used.
- The circuit breaker must be available in amperages appropriate to the design amperage of the system. In the USA, this is generally 30A and 50A, while European systems are generally 16A and 32A.
- 5. The ELCI shall have a leakage trip mechanism that trips if current exceeding 30mA leaks to ground.

AC Shore Power Source	Main Circuit Breaker	Branch Circuit Breaker
120V - 30A	3,000	3,000
120V - 50A	3,000	3,000
120/240V - 50A	5,000	3,000
240V - 50A	5,000	3,000

Sources of AC power, whether shore power or onboard generators and inverters, should always have a circuit breaker near the power source. This circuit breaker is designated the AC main circuit breaker. The AC main circuit breaker should always have a pole for each of the hot and neutral wires in the circuit assuring that circuit protection functions are not compromised in reverse polarity situations. Beginning in July 2010 ABYC Standards require that an Equipment Leakage Circuit Interrupter (ELCI) with a 30mA leakage trip be installed in shore power applications as the first protective device after the power inlet. ELCIs respond to leakage of electrical current outside of the intended current path, and provide overload and short circuit protection. They serve as the main AC circuit breaker for the system. These devices will open all energized conductors and the neutral when opened manually or tripping on an overload or leakage fault. For a more complete discussion of ELCIs, see page 82.

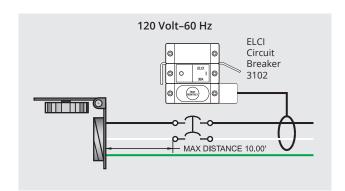

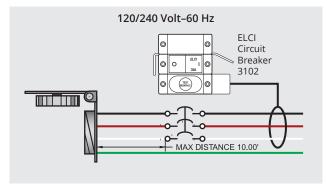

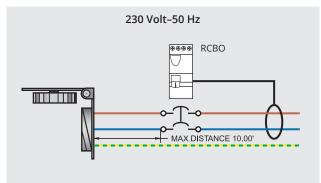



Marketing Materials

Blue Sea Systems offers sales and marketing materials that assist in promotion, and selection of products. For updated information and new marketing and sales materials, visit bluesea.com/marketing.

2020 Catalog

- 170 pages
- 25 catalogs per case
- Order individually



PN	Description
20020	2020 Blue Sea Systems Catalog

You Can Do It Guides

· 20 guides per pack



20005

PN	Description
20005	Design and Order a Custom Panel
20008	Protect Your Boat
20009	Add-A-Battery
20024	Install an ELCI Breaker

Logo Signs



20006



20036

PN	Description
20006	Logo Sign 24" x 7"
20036	Logo Sign 11.5" x 4"

Window Decal



Back Tags



PN	Description
9804	Window Decal 9" x 2.25"
9914	Back Tags


Brushed Cotton Hats

- Adjustable strap
- · One size fits all



PN	Color
20004	Stone
20003	Navy Blue

Wire, Fuse and Fuse Holder Selection Chart

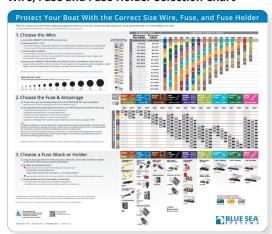

PN	Description	
20010	Deskmat 20" x 17"	

PN	Page	PN	Page	PN	Page	PN	Page	PN	Page
1001	105	1054	136	1232	123	1732200	144	20020	164
1001100	105	1055	136	1233	120	1733	144	20024	164
1002	105	1056	137	1325	141	1733200	144	2003	102
1002100	105	1057	137	1331	150	1739	144	20036	164
1003	105	1058	137	1408	34	1739200	144	2010	102
1003100	105	1070	150	1450	114	1741	144	2011	102
1007	105	11001	28	1455	114	1741200	144	2016	102
1007100	105	11003	30	1456	114	1800	141	2016100	102
1010	21	1139	26	1457	114	1801	141	2017	102
1011	21	1147	90	1459	114	1810	140	2017100	102
1011200	21	1148	90	1461	115	1811	140	2018	102
1012	21	1168	122	1463	114	1820	147	2018100	102
1013	21	1190	122	1464	115	1821	147	2019	98
1014	21	1193	122	1472	21	1829	147	2020	98
1015	21	1200	114	1474	142	1830	139	2101	102
1016	20	1201	116	1475	143	1832	139	2102	102
1016200	20	1202	121	1477	74	1833	139	2103	102
1020B	146	1203	121	1478	21	1834	139	2104	100
1021B	146	1206	120	1479	150	1836	139	2105	98
1022B	146	1207	120	1479100	150	1837	139	2107	100
1023B	146	1208	123	1480	125	1838	139	2126	98
1024B	146	1209	123	1481	124	1839	139	2127	98
1025B	146	1210	118	1482	124	1841	139	2128	98
1026B	146	1211	118	1483	124	1842	139	2129	71
1027B	146	1214	120	1484	124	1850	139	2130	71
1028B	146	1215	120	1485	124	1850	140	2131	71
1029B	146	1216	114	1486	124	1990	100	2132	71
1030B	146	1217	115	1487	125	1991	100	2133	71
1035	21	1218	126	1488	125	1992	100	2134	71
1036	21	1219	126	1489	125	1993	100	2135	71
1038	21	1221	116	1502	122	20003	164	2136	71
1039	20	1222	116	1510	146	20004	164	2137	71
1044	20	1223	115	1518	150	20005	164	2138	72
1045	20	1225	114	1519	141	20006	164	2139	72
1046	21	1227	115	1520	90	20008	164	2140	72
1050	136	1228	118	1521	16	20009	164	2141	72
1051	136	1229	118	1522	90	2001	102	2142	72
1052	136	1230	120	1525	138	20010	164	2143	72
1053	136	1231	123	1732	144	2002	102	2145	89



PN	Page	PN	Page	PN	Page	PN	Page	PN	Page
2146	89	2702	97	4005	104	4180	91	5021	56
2151	64	2708	100	4006	104	4181	91	5021	56
2155	89	2709	97	4008	104	4190	91	5022	56
2201	102	2710	97	4009	104	4192	91	5022	56
2202	102	2713	96	4010	104	4215	152	5023	59
2203	102	2715	97	4011	104	4216	152	5024	59
2204	102	2716	97	4012	104	4217	152	5025	62
2300	97	2718	98	4013	104	4218	152	5026	62
2301	97	2719	98	4014	104	4230	91	5028	62
2302	97	2722	97	4015	104	4302	111	5029	62
2303	97	2723	97	4016	104	4303	111	5030	62
2304	96	2730B	100	4017	104	4304	111	5031	62
2305	96	2731B	100	4018	104	4305	111	5032	61
2306	96	3000	30	4019B	104	4306	111	5033	62
2307	97	3001	30	4020B	104	4307	111	5034	62
2312	97	3002	30	4026	151	4308	111	5035	60
2314	96	3003	30	4027	151	4309	111	5037	60
2315	96	3091	83	4028	151	4320	109	5045	63
2340	101	3092	83	4029	151	4321	109	5046	63
2341B	101	3093	83	4031	151	4322	109	5049	70
2342B	101	3102100	83	4100	151	4323	109	5050	70
2356	96	3103	83	4111	92	4324	109	5051	70
2402	99	3104	83	4112	92	4325	109	5052	70
2404	99	3106100	83	4113	150	4363	22	5054	70
2406	99	3113	84	4116	92	4364	22	5056	58
2408	99	3116	84	4117	92	4365	22	5060	56
2410	99	3117	84	4119	92	4366	22	5061	56
2502	99	3118	84	4125	151	4367	22	5062	56
2504	99	3119	84	4126	151	4368	22	5063	56
2506	99	3120	84	4130	151	4369	22	5064	56
2508	99	3124	85	4131	151	4374	111	5064	56
2510	99	3125	85	4135	71	4376	111	5065	56
2512	99	3126	85	4136	71	4378	111	5065	56
2602	99	3131	78	4137	71	5001	64	5068	56
2604	99	4000	104	4138	92	5005	65	5101	54
2606	99	4001	104	4160	91	5006100	57	5102	54
2608	99	4002	104	4161	91	5007100	65	5103	54
2610	99	4003	104	4162	91	5015	57	5104	54
2701	97	4003	104	4163	91	5013	57	5105	54
2/01	97	4004	104	4103	91	3010	5/	3103	54



PN	Page	PN	Page	PN	Page	PN	Page	PN	Page
5107	54	5180	54	5220100	52	5257	54	5511e	28
5108	54	5181	54	5226	52	5258	54	6004	26
5112	55	5182	54	5227	52	5259	54	6004200	26
5113	55	5183	54	5228	52	5260	54	6005	26
5114	55	5184	54	5229	52	5261	53	6005200	26
5115	55	5185	54	5230	52	5262	53	6006	26
5116	55	5186	54	5231	52	5263	53	6006200	26
5117	55	5187	54	5232	52	5264	53	6007	26
5118	55	5189	54	5233	52	5265	53	6007200	26
5119	55	5190	54	5234	52	5270	53	6008	26
5120	55	5191	64	5235	53	5271	53	6008200	26
5121	55	5194	64	5235100	53	5272	53	6010	26
5122	55	5196	64	5236	53	5273	53	6010200	26
5123	55	5201	52	5236100	53	5274	53	6011	26
5124	55	5202	52	5237	53	5275	52	6011200	26
5125	55	5204	52	5237100	53	5280	52	6337	125
5126	55	5204100	52	5238	53	5281	52	7035	75
5127	55	5205	52	5239	53	5282	52	7036	75
5128	55	5206	52	5239100	53	5283	52	7038	75
5129	55	5206100	52	5240	53	5284	52	7039	75
5131	55	5207	52	5240100	53	5285	52	7040	75
5133	55	5208	52	5241	53	5286	53	7041	75
5135	55	5208100	52	5241100	53	5287	53	7042	75
5136	55	5209	52	5242	53	5288	52	7043	75
5137	55	5210	52	5242100	53	5289	52	7044	75
5138	53	5210100	52	5243	53	5290	53	7046	75
5139	53	5211	52	5243100	53	5291	53	7047	75
5140	53	5212	52	5244	53	5292	53	7048	75
5141	53	5213	52	5244100	53	5293	53	7049	75
5142	53	5213100	52	5245	53	5294	53	7050	71
5143	53	5215	52	5245100	53	5295	53	7052	71
5161	55	5215100	52	5246	53	5296	53	7053	71
5163	55	5217	52	5250	54	5297	53	7054	71
5164	55	5217100	52	5251	54	5298	53	7056	71
5165	55	5218	52	5252	54	5299	53	7057	71
5175	54	5218100	52	5253	54	5502	65	7058	71
5176	54	5219	52	5254	54	5502100	65	7059	71
5177	54	5219100	52	5255	54	5503	65	7061	71
5178	54	5220	52	5256	54	5510e	28	7062	73



766 73 7181 74 7236 78 7349 78 7446 77 7064 73 7182 74 7237 78 7350 80 7445 77 7066 73 7184 74 7239 78 7351 80 7455 77 7068 73 7185 74 7240 78 7353 80 7457 77 7068 73 7186 74 7241 78 7353 80 7457 77 7088 73 7186 74 7241 78 7355 80 7458 77 7081 74 7188 74 7244 80 7355 80 7451 77 7081 74 7188 74 7248 80 7399 79 7463 77 7082 74 7198 74 7258 80 7309 79 7463 77	PN	Page	PN	Page	PN	Page	PN	Page	PN	Page
7065 73 7183 74 7238 78 7351 80 7455 77 7066 73 7184 74 7239 78 7352 80 7456 77 7067 73 7185 74 7241 78 7353 80 7457 77 7068 73 7186 74 7241 78 7355 80 7458 77 7081 74 7188 74 7244 80 7365 80 7461 77 7081 74 7188 74 7244 80 7365 80 7461 77 7082 74 7189 74 7226 80 7300 79 7463 77 7083 74 7198 74 7220 78 7250 80 7400 79 7464 77 7086 74 7201 78 7256 80 7401 7	7063	73	7181	74	7236	78	7349	78	7446	77
7066 73 7184 74 7239 78 7352 80 7456 77 7067 73 7185 74 7240 78 7353 80 7457 77 7068 73 7186 74 7241 78 7353 80 7459 77 7080 74 7188 74 7242 78 7355 80 7459 77 7081 74 7188 74 7246 80 7355 80 7459 77 7082 74 7188 74 7246 80 7372 122 7462 77 7083 74 7197 78 72248 80 7399 79 7463 77 7083 74 7199 74 7250 80 7400 79 7464 77 7085 74 7201 78 7251 80 7401 79 7467 <td< td=""><td>7064</td><td>73</td><td>7182</td><td>74</td><td>7237</td><td>78</td><td>7350</td><td>80</td><td>7454</td><td>77</td></td<>	7064	73	7182	74	7237	78	7350	80	7454	77
7067 73 7185 74 7240 78 73533 80 7457 77 7068 73 7186 74 7241 78 7354 80 7458 77 7080 74 7187 74 7242 78 7355 80 7459 77 7081 74 7188 74 7246 80 73672 122 7462 77 7083 74 7197 78 7248 80 7399 79 7463 77 7083 74 7197 78 7250 80 7400 79 7464 77 7084 74 7200 78 7250 80 7400 79 7464 77 7085 74 7201 78 7251 80 7402 79 7466 77 7087 74 7201 78 7256 80 7404 79 7475 <t< td=""><td>7065</td><td>73</td><td>7183</td><td>74</td><td>7238</td><td>78</td><td>7351</td><td>80</td><td>7455</td><td>77</td></t<>	7065	73	7183	74	7238	78	7351	80	7455	77
7068 73 7186 74 7241 78 7354 80 7458 77 7080 74 7187 74 7242 78 7355 80 7499 77 7081 74 7188 74 7244 80 7355 80 7451 77 7082 74 7189 74 7246 80 7372 122 7462 77 7083 74 7198 74 7250 80 7400 79 7465 77 7084 74 7200 78 72501 80 7401 79 7465 77 7085 74 7201 78 72501 80 7401 79 7465 77 7086 74 7201 78 7251 80 7402 79 7466 77 7088 74 7204 78 7256 80 7403 79 7477 <t< td=""><td>7066</td><td>73</td><td>7184</td><td>74</td><td>7239</td><td>78</td><td>7352</td><td>80</td><td>7456</td><td>77</td></t<>	7066	73	7184	74	7239	78	7352	80	7456	77
7080 74 7187 74 7242 78 7355 80 7459 77 7081 74 7188 74 7244 80 7365 80 7461 77 7082 74 7189 74 7246 80 7372 122 7462 77 7083 74 7197 78 7248 80 7399 79 7463 77 7084 74 7198 74 7250 80 7400 79 7464 77 7085 74 7200 78 72501 80 7401 79 7464 77 7086 74 7201 78 7251 80 7402 79 7467 77 7087 74 7204 73 7256 80 7404 79 7475 81 7088 74 7205 78 7258 80 7406 79 7477 <th< td=""><td>7067</td><td>73</td><td>7185</td><td>74</td><td>7240</td><td>78</td><td>7353</td><td>80</td><td>7457</td><td>77</td></th<>	7067	73	7185	74	7240	78	7353	80	7457	77
7081 74 7188 74 7244 80 7365 80 7461 77 7082 74 7189 74 7246 80 7372 1122 7462 77 7083 74 7197 78 7248 80 7399 79 7463 77 7084 74 7198 74 7250 80 7400 79 7464 77 7085 74 7200 78 72501 80 7401 79 7465 77 7086 74 7201 78 7251 80 7402 79 7465 77 7087 74 7202 78 7256 80 7403 79 7467 77 7088 74 7205 78 7258 80 7405 79 7476 81 7098 74 7206 78 7267 80 7407 79 7480 <t< td=""><td>7068</td><td>73</td><td>7186</td><td>74</td><td>7241</td><td>78</td><td>7354</td><td>80</td><td>7458</td><td>77</td></t<>	7068	73	7186	74	7241	78	7354	80	7458	77
7082 74 7189 74 7246 80 7372 122 7462 77 7083 74 7197 78 7248 80 7399 79 7463 77 7084 74 7198 74 7250 80 7400 79 7464 77 7085 74 7200 78 72501 80 7401 79 7465 77 7086 74 7201 78 7251 80 7402 79 7466 77 7087 74 7202 78 7254 80 7403 79 7467 77 7088 74 7204 78 7258 80 7404 79 7476 81 7088 74 7205 78 7258 80 7404 79 7476 81 7136 75 7208 78 7268 80 7407 79 7481 <td< td=""><td>7080</td><td>74</td><td>7187</td><td>74</td><td>7242</td><td>78</td><td>7355</td><td>80</td><td>7459</td><td>77</td></td<>	7080	74	7187	74	7242	78	7355	80	7459	77
7083 74 7197 78 7248 80 7399 79 7463 77 7084 74 7198 74 7250 80 7400 79 7464 77 7085 74 7200 78 72501 80 7401 79 7465 77 7086 74 7201 78 7251 80 7402 79 7466 77 7087 74 7202 78 7256 80 7403 79 7467 77 7088 74 7204 78 7256 80 7404 79 7476 81 7088 74 7205 78 7258 80 7405 79 7476 81 7098 74 7206 78 7250 78 7260 78 7405 79 7477 81 7136 75 7209 78 7268 80 7410	7081	74	7188	74	7244	80	7365	80	7461	77
7084 74 7198 74 7250 80 7400 79 7464 77 7085 74 7200 78 72501 80 7401 79 7465 77 7086 74 7201 78 7251 80 7402 79 7466 77 7087 74 7202 78 7254 80 7403 79 7467 77 7088 74 7204 78 7256 80 7404 79 7475 81 7098 74 7206 78 7260 78 7406 79 7477 81 7135 75 7208 78 7267 80 7407 79 7480 90 7136 75 7209 78 7268 80 7410 79 7481 90 7138 75 7210 78 7269 80 7410 79 7483	7082	74	7189	74	7246	80	7372	122	7462	77
7085 74 7200 78 72501 80 7401 79 7465 77 7086 74 7201 78 7251 80 7402 79 7466 77 7087 74 7202 78 7254 80 7403 79 7467 77 7088 74 7204 78 7256 80 7404 79 7475 81 7089 74 7205 78 7258 80 7405 79 7476 81 7098 74 7206 78 7260 78 7406 79 7476 81 7135 75 7208 78 7267 80 7407 79 7480 90 7136 75 7209 78 7268 80 7407 79 7481 90 7138 75 7210 78 7269 80 7410 79 7482	7083	74	7197	78	7248	80	7399	79	7463	77
7086 74 7201 78 7251 80 7402 79 7466 77 7087 74 7202 78 7254 80 7403 79 7467 77 7088 74 7204 78 7256 80 7404 79 7475 81 7089 74 7205 78 7258 80 7405 79 7476 81 7098 74 7206 78 7260 78 7406 79 7477 81 7135 75 7208 78 7267 80 7407 79 7480 90 7136 75 7209 78 7268 80 7410 79 7481 90 7138 75 7210 78 7269 80 7411 79 7483 90 7140 75 7213 78 7271 80 7412 79 7484 9	7084	74	7198	74	7250	80	7400	79	7464	77
7087 74 7202 78 7254 80 7403 79 7467 77 7088 74 7204 78 7256 80 7404 79 7475 81 7089 74 7205 78 7258 80 7405 79 7476 81 7098 74 7206 78 7260 78 7406 79 7477 81 7135 75 7208 78 7267 80 7407 79 7480 90 7136 75 7209 78 7268 80 7408 79 7481 90 7138 75 7210 78 7269 80 7410 79 7482 90 7139 75 7212 78 7270 80 7411 79 7483 90 7140 75 7213 78 7221 80 7412 79 7484 9	7085	74	7200	78	72501	80	7401	79	7465	77
7088 74 7204 78 7256 80 7404 79 7475 81 7089 74 7205 78 7258 80 7405 79 7476 81 7098 74 7206 78 7260 78 7406 79 7477 81 7135 75 7208 78 7267 80 7407 79 7480 90 7136 75 7209 78 7268 80 7408 79 7481 90 7138 75 7210 78 7269 80 7410 79 7482 90 7139 75 7212 78 7270 80 7411 79 7483 90 7140 75 7213 78 72271 80 7412 79 7484 90 7141 75 7214 78 7228 80 7413 79 7495	7086	74	7201	78	7251	80	7402	79	7466	77
7089 74 7205 78 7258 80 7405 79 7476 81 2098 74 7206 78 7260 78 7406 79 7477 81 7135 75 7208 78 7267 80 7407 79 7480 90 7136 75 7209 78 7268 80 7408 79 7481 90 7138 75 7210 78 7269 80 7410 79 7482 90 7139 75 7212 78 7270 80 7411 79 7483 90 7140 75 7213 78 7271 80 7412 79 7484 90 7141 75 7214 78 7287 80 7413 79 7484 90 7142 75 7216 78 7288 80 7414 79 7490 9	7087	74	7202	78	7254	80	7403	79	7467	77
7098 74 7206 78 7260 78 7406 79 7477 81 7135 75 7208 78 7267 80 7407 79 7480 90 7136 75 7209 78 7268 80 7408 79 7481 90 7138 75 7210 78 7269 80 7410 79 7482 90 7139 75 7212 78 7270 80 7411 79 7483 90 7140 75 7213 78 7271 80 7412 79 7484 90 7141 75 7214 78 7287 80 7413 79 7485 90 7142 75 7216 78 7288 80 7414 79 7490 90 7143 75 7218 78 7290 80 7416 79 7492 9	7088	74	7204	78	7256	80	7404	79	7475	81
7135 75 7208 78 7267 80 7407 79 7480 90 7136 75 7209 78 7268 80 7408 79 7481 90 7138 75 7210 78 7269 80 7410 79 7482 90 7139 75 7212 78 7270 80 7411 79 7483 90 7140 75 7213 78 7271 80 7412 79 7484 90 7141 75 7214 78 7287 80 7413 79 7485 90 7142 75 7216 78 7288 80 7414 79 7490 90 7143 75 7217 78 7289 80 7416 79 7492 90 7144 75 7218 78 7299 80 7416 79 7492 9	7089	74	7205	78	7258	80	7405	79	7476	81
7136 75 7209 78 7268 80 7408 79 7481 90 7138 75 7210 78 7269 80 7410 79 7482 90 7139 75 7212 78 7270 80 7411 79 7483 90 7140 75 7213 78 7271 80 7412 79 7484 90 7141 75 7214 78 7287 80 7413 79 7485 90 7142 75 7216 78 7288 80 7414 79 7490 90 7143 75 7217 78 7289 80 7415 79 7491 90 7144 75 7218 78 7290 80 7416 79 7492 90 7146 75 7220 78 7294 78 7417 79 7493 9	7098	74	7206	78	7260	78	7406	79	7477	81
7138 75 7210 78 7269 80 7410 79 7482 90 7139 75 7212 78 7270 80 7411 79 7483 90 7140 75 7213 78 7271 80 7412 79 7484 90 7141 75 7214 78 7287 80 7413 79 7485 90 7142 75 7216 78 7288 80 7414 79 7490 90 7143 75 7217 78 7289 80 7415 79 7491 90 7144 75 7218 78 7290 80 7416 79 7492 90 7146 75 7220 78 7294 78 7417 79 7493 90 7147 75 7221 78 7299 78 7427 79 7494 9	7135	75	7208	78	7267	80	7407	79	7480	90
7139 75 7212 78 7270 80 7411 79 7483 90 7140 75 7213 78 7271 80 7412 79 7484 90 7141 75 7214 78 7287 80 7413 79 7485 90 7142 75 7216 78 7288 80 7414 79 7490 90 7143 75 7217 78 7289 80 7415 79 7491 90 7144 75 7218 78 7290 80 7416 79 7492 90 7146 75 7220 78 7294 78 7417 79 7493 90 7147 75 7221 78 7295 78 7425 79 7494 90 7148 75 7222 78 7299 78 7427 79 7495 9	7136	75	7209	78	7268	80	7408	79	7481	90
7140 75 7213 78 7271 80 7412 79 7484 90 7141 75 7214 78 7287 80 7413 79 7485 90 7142 75 7216 78 7288 80 7414 79 7490 90 7143 75 7217 78 7289 80 7415 79 7491 90 7144 75 7218 78 7290 80 7416 79 7492 90 7146 75 7220 78 7294 78 7417 79 7493 90 7147 75 7221 78 7295 78 7425 79 7494 90 7148 75 7222 78 7299 78 7427 79 7495 90 7148 75 7224 78 7310 76 7428 79 7504 2	7138	75	7210	78	7269	80	7410	79	7482	90
7141 75 7214 78 7287 80 7413 79 7485 90 7142 75 7216 78 7288 80 7414 79 7490 90 7143 75 7217 78 7289 80 7415 79 7491 90 7144 75 7218 78 7290 80 7416 79 7492 90 7146 75 7220 78 7294 78 7417 79 7493 90 7147 75 7221 78 7295 78 7425 79 7494 90 7148 75 7222 78 7299 78 7427 79 7495 90 7149 75 7224 78 7310 76 7428 79 7504 23 7151 72 7225 78 7311 76 7429 79 7506 2	7139	75	7212	78	7270	80	7411	79	7483	90
7142 75 7216 78 7288 80 7414 79 7490 90 7143 75 7217 78 7289 80 7415 79 7491 90 7144 75 7218 78 7290 80 7416 79 7492 90 7146 75 7220 78 7294 78 7417 79 7493 90 7147 75 7221 78 7295 78 7425 79 7494 90 7148 75 7222 78 7299 78 7427 79 7495 90 7149 75 7224 78 7310 76 7428 79 7504 23 7151 72 7225 78 7311 76 7429 79 7506 23 7152 72 7226 78 7312 76 7430 79 7507 2	7140	75	7213	78	7271	80	7412	79	7484	90
7143 75 7217 78 7289 80 7415 79 7491 90 7144 75 7218 78 7290 80 7416 79 7492 90 7146 75 7220 78 7294 78 7417 79 7493 90 7147 75 7221 78 7295 78 7425 79 7494 90 7148 75 7222 78 7299 78 7427 79 7495 90 7149 75 7224 78 7310 76 7428 79 7504 23 7151 72 7225 78 7311 76 7429 79 7506 23 7152 72 7226 78 7312 76 7430 79 7507 23 7153 72 7228 78 7313 76 7440 77 7508 2	7141	75	7214	78	7287	80	7413	79	7485	90
7144 75 7218 78 7290 80 7416 79 7492 90 7146 75 7220 78 7294 78 7417 79 7493 90 7147 75 7221 78 7295 78 7425 79 7494 90 7148 75 7222 78 7299 78 7427 79 7495 90 7149 75 7224 78 7310 76 7428 79 7504 23 7151 72 7225 78 7311 76 7429 79 7506 23 7152 72 7226 78 7312 76 7430 79 7507 23 7153 72 7228 78 7313 76 7433 79 7508 23 7154 72 7229 78 7314 76 7440 77 7509 2	7142	75	7216	78	7288	80	7414	79	7490	90
7146 75 7220 78 7294 78 7417 79 7493 90 7147 75 7221 78 7295 78 7425 79 7494 90 7148 75 7222 78 7299 78 7427 79 7495 90 7149 75 7224 78 7310 76 7428 79 7504 23 7151 72 7225 78 7311 76 7429 79 7506 23 7152 72 7226 78 7312 76 7430 79 7507 23 7153 72 7228 78 7313 76 7433 79 7508 23 7154 72 7229 78 7314 76 7440 77 7509 23 7155 72 7230 78 7315 76 7441 77 7517 1	7143	75	7217	78	7289	80	7415	79	7491	90
7147 75 7221 78 7295 78 7425 79 7494 90 7148 75 7222 78 7299 78 7427 79 7495 90 7149 75 7224 78 7310 76 7428 79 7504 23 7151 72 7225 78 7311 76 7429 79 7506 23 7152 72 7226 78 7312 76 7430 79 7507 23 7153 72 7228 78 7313 76 7433 79 7508 23 7154 72 7229 78 7314 76 7440 77 7509 23 7155 72 7230 78 7315 76 7441 77 7512 15 7156 72 7232 78 7316 76 7442 77 7517 1	7144	75	7218	78	7290	80	7416	79	7492	90
7148 75 7222 78 7299 78 7427 79 7495 90 7149 75 7224 78 7310 76 7428 79 7504 23 7151 72 7225 78 7311 76 7429 79 7506 23 7152 72 7226 78 7312 76 7430 79 7507 23 7153 72 7228 78 7313 76 7433 79 7508 23 7154 72 7229 78 7314 76 7440 77 7509 23 7155 72 7230 78 7315 76 7441 77 7512 15 7156 72 7232 78 7316 76 7442 77 7517 16 7157 72 7233 78 7317 76 7443 77 7520 1	7146	75	7220	78	7294	78	7417	79	7493	90
7149 75 7224 78 7310 76 7428 79 7504 23 7151 72 7225 78 7311 76 7429 79 7506 23 7152 72 7226 78 7312 76 7430 79 7507 23 7153 72 7228 78 7313 76 7433 79 7508 23 7154 72 7229 78 7314 76 7440 77 7509 23 7155 72 7230 78 7315 76 7441 77 7512 15 7156 72 7232 78 7316 76 7442 77 7517 16 7157 72 7233 78 7317 76 7443 77 7520 16 7160 72 7234 78 7347 78 7444 77 7531 15	7147	75	7221	78	7295	78	7425	79	7494	90
7151 72 7225 78 7311 76 7429 79 7506 23 7152 72 7226 78 7312 76 7430 79 7507 23 7153 72 7228 78 7313 76 7433 79 7508 23 7154 72 7229 78 7314 76 7440 77 7509 23 7155 72 7230 78 7315 76 7441 77 7512 15 7156 72 7232 78 7316 76 7442 77 7517 16 7157 72 7233 78 7317 76 7443 77 7520 16 7160 72 7234 78 7347 78 7444 77 7531 15	7148	75	7222	78	7299	78	7427	79	7495	90
7152 72 7226 78 7312 76 7430 79 7507 23 7153 72 7228 78 7313 76 7433 79 7508 23 7154 72 7229 78 7314 76 7440 77 7509 23 7155 72 7230 78 7315 76 7441 77 7512 15 7156 72 7232 78 7316 76 7442 77 7517 16 7157 72 7233 78 7317 76 7443 77 7520 16 7160 72 7234 78 7347 78 7444 77 7531 15	7149	75	7224	78	7310	76	7428	79	7504	23
7153 72 7228 78 7313 76 7433 79 7508 23 7154 72 7229 78 7314 76 7440 77 7509 23 7155 72 7230 78 7315 76 7441 77 7512 15 7156 72 7232 78 7316 76 7442 77 7517 16 7157 72 7233 78 7317 76 7443 77 7520 16 7160 72 7234 78 7347 78 7444 77 7531 15	7151	72	7225	78	7311	76	7429	79	7506	23
7154 72 7229 78 7314 76 7440 77 7509 23 7155 72 7230 78 7315 76 7441 77 7512 15 7156 72 7232 78 7316 76 7442 77 7517 16 7157 72 7233 78 7317 76 7443 77 7520 16 7160 72 7234 78 7347 78 7444 77 7531 15	7152	72	7226	78	7312	76	7430	79	7507	23
7155 72 7230 78 7315 76 7441 77 7512 15 7156 72 7232 78 7316 76 7442 77 7517 16 7157 72 7233 78 7317 76 7443 77 7520 16 7160 72 7234 78 7347 78 7444 77 7531 15	7153	72	7228	78	7313	76	7433	79	7508	23
7156 72 7232 78 7316 76 7442 77 7517 16 7157 72 7233 78 7317 76 7443 77 7520 16 7160 72 7234 78 7347 78 7444 77 7531 15	7154	72	7229	78	7314	76	7440	77	7509	23
7157 72 7233 78 7317 76 7443 77 7520 16 7160 72 7234 78 7347 78 7444 77 7531 15	7155	72	7230	78	7315	76	7441	77	7512	15
7160 72 7234 78 7347 78 7444 77 7531 15	7156	72	7232	78	7316	76	7442	77	7517	16
	7157	72	7233	78	7317	76	7443	77	7520	16
7180 74 7235 78 7348 78 7445 77 7532 15	7160	72	7234	78	7347	78	7444	77	7531	15
	7180	74	7235	78	7348	78	7445	77	7532	15

75-60 81 7621100 47 7844 17 8819 136 8898 80 7541 81 7622 47 7840 17 8622 136 8699 126 7542 81 7623 47 7850 17 8625 114 8096 118 7543 81 7623 47 7851 17 8625 114 8097 118 7546 81 7635 36 7860 17 8028 136 8100 122 7547 81 7649 44 7870 156 8029 120 8101 122 7548 81 756903 44 7900 26 8031 152 8110 144 7550 41 79003 26 8032 152 8127 120 7561 81 7654 45 7902 26 8034 151 8132 123	PN	Page	PN	Page	PN	Page	PN	Page	PN	Page
7542 81 7622100 47 7841 17 8023 114 8096 114 7543 81 7623 47 7850 17 8025 114 8097 118 7545 81 7623100 47 7851 17 8025 120 8099 120 7546 81 7649 44 7870 156 8029 120 8101 122 7548 81 764903 44 7900 26 8030 152 8102 122 7549 81 765003 44 7900 26 8031 152 8110 144 7550 81 76503 45 7901200 26 8033 151 8127 120 7561 81 7654 45 7903 26 8037 92 8134 151 8132 123 7563 81 7700 39 7903200 26	7540	81	7621100	47	7834	17	8019	136	8089	80
7543 81 7623 47 7850 17 8025 114 8097 118 7545 81 7623100 47 7851 17 8027 120 8099 120 7546 81 7635 36 7860 17 8028 136 8100 122 7547 81 764903 44 7870 156 8029 120 8101 122 7548 81 764903 44 79001 26 8030 152 8110 144 7554 81 765002 44 7901 26 8032 123 8127 120 7560 81 7653 45 7902 156 8034 151 8122 120 7561 81 7654 45 7903 26 8038 156 8144 1120 7563 81 7700100 39 79020 26 8038 152	7541	81	7622	47	7840	17	8022	136	8095	126
7945 81 7623100 47 7851 17 8027 120 8099 120 7546 81 7635 36 7860 17 8028 136 8100 122 7547 81 7649 44 7870 156 8029 120 8101 122 7548 81 7649033 44 7900 26 8030 152 8102 122 7549 81 765003 44 7900200 26 8033 151 8110 142 7560 81 7653 45 790120 26 8033 151 8132 120 7561 81 7653 45 7902 156 8034 151 8132 123 7563 81 7700 39 790200 26 8038 136 8134 151 7563 81 7700 39 790200 26 8038 136	7542	81	7622100	47	7841	17	8023	114	8096	114
7546 81 7635 36 7860 17 8028 136 8100 122 7547 81 7649 44 7870 156 8029 120 8101 122 7548 81 764903 44 7900 26 8030 152 8102 122 7554 81 76500 44 7901 26 8031 152 8110 144 7554 81 76530 44 7901 26 8031 151 81279 120 7561 81 7653 45 7902 156 8034 151 8132 123 120 7561 81 7654 45 7902 26 8033 151 8132 123 7563 81 7765 45 7903 26 8038 136 8134 120 7564 81 7701000 39 79910 14 8039	7543	81	7623	47	7850	17	8025	114	8097	118
7547 81 7649 44 7870 156 8029 120 8101 122 7548 81 7649003 44 7900 26 8030 152 8102 122 7549 81 7650 44 7900200 26 8031 152 8110 144 7554 81 76533 45 7901200 26 8032 123 8127 120 7561 81 7653 45 7901200 26 8034 151 8129 120 7561 81 7655 45 7902 156 8034 151 8129 120 7563 81 7665 45 7903 26 8038 136 8143 120 7564 81 7701 35 7911 14 8039 152 8158 118 7568 81 770100 35 7912 14 8041 136	7545	81	7623100	47	7851	17	8027	120	8099	120
7548 81 7649003 44 7900 26 8030 152 8102 122 7549 81 7650 44 7900200 26 8031 152 8110 144 7554 81 7650033 44 7901 26 8032 123 8127 120 7560 81 7653 45 7901200 26 8033 151 8129 120 7561 81 7654 45 7902 156 8034 151 8132 123 7563 81 7655 45 7903 26 8037 92 8134 312 120 7564 81 7700 39 7993200 26 8038 136 813 720100 39 7910 14 8039 152 8158 118 7568 81 770100 35 7912 14 8043 120 8161 123	7546	81	7635	36	7860	17	8028	136	8100	122
7549 81 7650 44 7900200 26 8031 152 8110 144 7554 81 765003 44 7901 26 8032 123 8127 120 7560 81 7653 45 7901200 26 8033 151 8129 120 7561 81 7654 45 7902 156 8034 151 8132 123 7563 81 7655 45 7903 26 8037 92 8134 151 7564 81 7700100 39 7902000 26 8038 136 8143 120 7565 81 770100 35 7910 14 8043 120 8165 118 7574 79 77020 39 7920 14 8043 120 8161 123 7575 79 7702100 39 7921 14 8053 110 <td>7547</td> <td>81</td> <td>7649</td> <td>44</td> <td>7870</td> <td>156</td> <td>8029</td> <td>120</td> <td>8101</td> <td>122</td>	7547	81	7649	44	7870	156	8029	120	8101	122
7554 81 7650003 44 7901 26 8032 123 8127 120 7560 81 7653 45 7901200 26 8033 151 8129 120 7561 81 7654 45 7902 156 8034 151 8132 123 7563 81 7655 45 7903 26 8037 92 8134 151 7564 81 7700 39 7903200 26 8038 136 8143 120 7565 81 7700100 39 7910 14 8041 136 8158 118 7568 81 7701 35 7911 14 8043 120 8161 123 7574 79 770100 35 7912 14 8041 136 8161 123 7577 79 7702100 39 7921 14 8053 110	7548	81	7649003	44	7900	26	8030	152	8102	122
7560 81 7653 45 7901200 26 8033 151 8129 120 7561 81 7654 45 7902 156 8034 151 8132 123 7563 81 7655 45 7903 26 8037 92 8134 151 7564 81 7700 39 7902200 26 8038 136 8143 120 7565 81 7700100 39 7910 14 8039 152 8158 118 7558 81 770100 35 7911 14 8041 136 8159 118 7574 79 7701100 35 7912 14 8043 120 8161 123 7575 79 7702100 39 7920 14 8051 142 8165 119 7577 79 7702100 39 7921 14 8053 110 <td>7549</td> <td>81</td> <td>7650</td> <td>44</td> <td>7900200</td> <td>26</td> <td>8031</td> <td>152</td> <td>8110</td> <td>144</td>	7549	81	7650	44	7900200	26	8031	152	8110	144
7561 81 7654 45 7902 156 8034 151 8132 123 7563 81 7655 45 7903 26 8037 92 8134 151 7564 81 7700 39 7903200 26 8038 136 8143 120 7565 81 7700100 39 7910 14 8039 152 8158 118 7568 81 7701 35 7911 14 8041 136 8159 118 7574 79 770100 35 7912 14 8043 120 8161 123 7575 79 7702 39 7920 14 8051 142 8165 119 7577 79 7702100 39 7921 14 8053 110 8166 151 7580 81 7703 35 7928 88 8058 118	7554	81	7650003	44	7901	26	8032	123	8127	120
7563 81 7655 45 7903 26 8037 92 8134 151 7564 81 7700 39 7903200 26 8038 136 8143 120 7565 81 7700100 39 7910 14 8039 152 8158 118 7568 81 7701 35 7911 14 8041 136 8159 118 7574 79 770100 35 7912 14 8043 120 8161 123 7575 79 7702 39 7920 14 8051 142 8165 119 7577 79 7702100 39 7921 14 8053 110 8166 151 7580 81 7703 35 7928 88 8054 110 8167 151 7583 81 7713 39 7930 88 8058 118	7560	81	7653	45	7901200	26	8033	151	8129	120
7564 81 7700 39 7903200 26 8038 136 8143 120 7565 81 7700100 39 7910 14 8039 152 8158 118 7568 81 7701 35 7911 14 8041 136 8159 118 7574 79 770100 35 7912 14 8043 120 8161 123 7575 79 7702100 39 7920 14 8051 142 8165 119 7577 79 7702100 39 7921 14 8053 110 8166 151 7580 81 7703 35 7928 88 8058 118 8169 151 7581 81 771300 39 7931 88 8059 118 8171 151 7584 81 7717100 39 7932 88 8061 123	7561	81	7654	45	7902	156	8034	151	8132	123
7565 81 770100 39 7910 14 8039 152 8158 118 7568 81 7701 35 7911 14 8041 136 8159 118 7574 79 7701100 35 7912 14 8043 120 8161 123 7575 79 7702 39 7920 14 8051 142 8165 119 7577 79 7702100 39 7921 14 8053 110 8166 151 7580 81 7703 35 7928 88 8054 110 8167 151 7581 81 7703100 35 7929 88 8058 118 8169 151 7583 81 7713 39 7930 88 8059 118 8171 151 7584 81 771100 39 7931 88 8061 123	7563	81	7655	45	7903	26	8037	92	8134	151
7568 81 7701 35 7911 14 8041 136 8159 118 7574 79 770100 35 7912 14 8043 120 8161 123 7575 79 7702 39 7920 14 8051 142 8165 119 7577 79 7702100 39 7921 14 8053 110 8166 151 7580 81 7703 35 7928 88 8054 110 8167 151 7581 81 7703100 35 7929 88 8058 118 8167 151 7583 81 7713 39 7930 88 8059 118 8171 151 7584 81 7713100 39 7931 88 8066 151 8173 78 7585 81 771700 39 7933 88 8067 152	7564	81	7700	39	7903200	26	8038	136	8143	120
7574 79 7701100 35 7912 14 8043 120 8161 123 7575 79 7702 39 7920 14 8051 142 8165 119 7577 79 7702100 39 7921 14 8053 110 8166 151 7580 81 7703 35 7928 88 8054 110 8167 151 7581 81 7703100 35 7929 88 8058 118 8169 151 7583 81 7713 39 7930 88 8059 118 8171 151 7584 81 7713100 39 7931 88 8061 123 8172 151 7585 81 7717 39 7932 88 8066 151 8173 78 7588 81 7717100 39 7933 88 8067 152	7565	81	7700100	39	7910	14	8039	152	8158	118
7575 79 7702 39 7920 14 8051 142 8165 119 7577 79 7702100 39 7921 14 8053 110 8166 151 7580 81 7703 35 7928 88 8054 110 8167 151 7581 81 7703100 35 7929 88 8058 118 8169 151 7583 81 7713 39 7930 88 8059 118 8171 151 7584 81 7713100 39 7931 88 8061 123 8172 151 7585 81 7717 39 7932 88 8066 151 8173 78 7588 81 7717100 39 7933 88 8067 152 8174 121 7601 42 7720 66 7934 88 8072 78	7568	81	7701	35	7911	14	8041	136	8159	118
7577 79 7702100 39 7921 14 8053 110 8166 151 7580 81 7703 35 7928 88 8054 110 8167 151 7581 81 7703100 35 7929 88 8058 118 8169 151 7583 81 7713 39 7930 88 8059 118 8171 151 7584 81 7713100 39 7931 88 8061 123 8172 151 7585 81 7717 39 7932 88 8066 151 8173 78 7588 81 7717100 39 7933 88 8067 152 8174 121 7601 42 7720 66 7934 88 8072 78 8177 120 7604 18 7725 67 7936 88 8073 147	7574	79	7701100	35	7912	14	8043	120	8161	123
7580 81 7703 35 7928 88 8054 110 8167 151 7581 81 7703100 35 7929 88 8058 118 8169 151 7583 81 7713 39 7930 88 8059 118 8171 151 7584 81 7713100 39 7931 88 8061 123 8172 151 7585 81 7717 39 7932 88 8066 151 8173 78 7588 81 7717100 39 7933 88 8067 152 8174 121 7601 42 7720 66 7934 88 8068 115 8176 121 7603 18 7721 66 7935 88 8072 78 8177 120 7604 18 7820 17 7937 88 8074 121 <td< td=""><td>7575</td><td>79</td><td>7702</td><td>39</td><td>7920</td><td>14</td><td>8051</td><td>142</td><td>8165</td><td>119</td></td<>	7575	79	7702	39	7920	14	8051	142	8165	119
7581 81 7703100 35 7929 88 8058 118 8169 151 7583 81 7713 39 7930 88 8059 118 8171 151 7584 81 7713100 39 7931 88 8061 123 8172 151 7585 81 7717 39 7932 88 8066 151 8173 78 7588 81 7717100 39 7933 88 8067 152 8174 121 7601 42 7720 66 7934 88 8068 115 8176 121 7603 18 7721 66 7935 88 8072 78 8177 120 7604 18 7725 67 7936 88 8073 147 8179 120 7605 18 7748 67 7937 88 8074 121 <td< td=""><td>7577</td><td>79</td><td>7702100</td><td>39</td><td>7921</td><td>14</td><td>8053</td><td>110</td><td>8166</td><td>151</td></td<>	7577	79	7702100	39	7921	14	8053	110	8166	151
7583 81 7713 39 7930 88 8059 118 8171 151 7584 81 7713100 39 7931 88 8061 123 8172 151 7585 81 7717 39 7932 88 8066 151 8173 78 7588 81 7717100 39 7933 88 8067 152 8174 121 7601 42 7720 66 7934 88 8068 115 8176 121 7603 18 7721 66 7935 88 8072 78 8177 120 7604 18 7725 67 7936 88 8073 147 8179 120 7605 18 7748 67 7937 88 8074 121 8184 126 7607 18 7820 17 7938 88 8077 120 81	7580	81	7703	35	7928	88	8054	110	8167	151
7584 81 7713100 39 7931 88 8061 123 8172 151 7585 81 7717 39 7932 88 8066 151 8173 78 7588 81 7717100 39 7933 88 8067 152 8174 121 7601 42 7720 66 7934 88 8068 115 8176 121 7603 18 7721 66 7935 88 8072 78 8177 120 7604 18 7725 67 7936 88 8073 147 8179 120 7605 18 7748 67 7937 88 8074 121 8184 126 7606 18 7820 17 7938 88 8076 121 8186 127 7607 18 7821 17 7943 88 8079 120 81	7581	81	7703100	35	7929	88	8058	118	8169	151
7585 81 7717 39 7932 88 8066 151 8173 78 7588 81 7717100 39 7933 88 8067 152 8174 121 7601 42 7720 66 7934 88 8068 115 8176 121 7603 18 7721 66 7935 88 8072 78 8177 120 7604 18 7725 67 7936 88 8073 147 8179 120 7605 18 7748 67 7937 88 8074 121 8184 126 7606 18 7820 17 7938 88 8076 121 8186 127 7607 18 7821 17 7939 88 8077 120 8195 126 7608 18 7822 17 7943 88 8079 120 8197<	7583	81	7713	39	7930	88	8059	118	8171	151
7588 81 7717100 39 7933 88 8067 152 8174 121 7601 42 7720 66 7934 88 8068 115 8176 121 7603 18 7721 66 7935 88 8072 78 8177 120 7604 18 7725 67 7936 88 8073 147 8179 120 7605 18 7748 67 7937 88 8074 121 8184 126 7606 18 7820 17 7938 88 8076 121 8186 127 7607 18 7821 17 7939 88 8077 120 8195 126 7608 18 7822 17 7943 88 8079 120 8197 118 7609 18 7823 17 7944 88 8080 34 8199<	7584	81	7713100	39	7931	88	8061	123	8172	151
7601 42 7720 66 7934 88 8068 115 8176 121 7603 18 7721 66 7935 88 8072 78 8177 120 7604 18 7725 67 7936 88 8073 147 8179 120 7605 18 7748 67 7937 88 8074 121 8184 126 7606 18 7820 17 7938 88 8076 121 8186 127 7607 18 7821 17 7939 88 8077 120 8195 126 7608 18 7822 17 7943 88 8079 120 8197 118 7609 18 7823 17 7944 88 8080 34 8199 120 7610 43 7824 17 7945 88 8081 114 8200 <td>7585</td> <td>81</td> <td>7717</td> <td>39</td> <td>7932</td> <td>88</td> <td>8066</td> <td>151</td> <td>8173</td> <td>78</td>	7585	81	7717	39	7932	88	8066	151	8173	78
7603 18 7721 66 7935 88 8072 78 8177 120 7604 18 7725 67 7936 88 8073 147 8179 120 7605 18 7748 67 7937 88 8074 121 8184 126 7606 18 7820 17 7938 88 8076 121 8186 127 7607 18 7821 17 7939 88 8077 120 8195 126 7608 18 7822 17 7943 88 8079 120 8197 118 7609 18 7823 17 7944 88 8080 34 8199 120 7610 43 7824 17 7945 88 8081 114 8200 92 7611 46 7825 17 8003 136 8082 115 8204 <td>7588</td> <td>81</td> <td>7717100</td> <td>39</td> <td>7933</td> <td>88</td> <td>8067</td> <td>152</td> <td>8174</td> <td>121</td>	7588	81	7717100	39	7933	88	8067	152	8174	121
7604 18 7725 67 7936 88 8073 147 8179 120 7605 18 7748 67 7937 88 8074 121 8184 126 7606 18 7820 17 7938 88 8076 121 8186 127 7607 18 7821 17 7939 88 8077 120 8195 126 7608 18 7822 17 7943 88 8079 120 8197 118 7609 18 7823 17 7944 88 8080 34 8199 120 7610 43 7824 17 7945 88 8081 114 8200 92 7611 46 7825 17 8003 136 8082 115 8204 92 7620 47 7831 17 8013 143 8086 127 8206 <td>7601</td> <td>42</td> <td>7720</td> <td>66</td> <td>7934</td> <td>88</td> <td>8068</td> <td>115</td> <td>8176</td> <td>121</td>	7601	42	7720	66	7934	88	8068	115	8176	121
7605 18 7748 67 7937 88 8074 121 8184 126 7606 18 7820 17 7938 88 8076 121 8186 127 7607 18 7821 17 7939 88 8077 120 8195 126 7608 18 7822 17 7943 88 8079 120 8197 118 7609 18 7823 17 7944 88 8080 34 8199 120 7610 43 7824 17 7945 88 8081 114 8200 92 7611 46 7825 17 8003 136 8082 115 8204 92 7615 37 7830 17 8005 136 8084 126 8205 92 7620 47 7831 17 8013 143 8086 127 8206 92 7620100 47 7832 17 8017 136	7603	18	7721	66	7935	88	8072	78	8177	120
7606 18 7820 17 7938 88 8076 121 8186 127 7607 18 7821 17 7939 88 8077 120 8195 126 7608 18 7822 17 7943 88 8079 120 8197 118 7609 18 7823 17 7944 88 8080 34 8199 120 7610 43 7824 17 7945 88 8081 114 8200 92 7611 46 7825 17 8003 136 8082 115 8204 92 7615 37 7830 17 8005 136 8084 126 8205 92 7620 47 7831 17 8013 143 8086 127 8206 92 7620100 47 7832 17 8017 136 8087 80 8207 92	7604	18	7725	67	7936	88	8073	147	8179	120
7607 18 7821 17 7939 88 8077 120 8195 126 7608 18 7822 17 7943 88 8079 120 8197 118 7609 18 7823 17 7944 88 8080 34 8199 120 7610 43 7824 17 7945 88 8081 114 8200 92 7611 46 7825 17 8003 136 8082 115 8204 92 7615 37 7830 17 8005 136 8084 126 8205 92 7620 47 7831 17 8013 143 8086 127 8206 92 7620100 47 7832 17 8017 136 8087 80 8207 92	7605	18	7748	67	7937	88	8074	121	8184	126
7608 18 7822 17 7943 88 8079 120 8197 118 7609 18 7823 17 7944 88 8080 34 8199 120 7610 43 7824 17 7945 88 8081 114 8200 92 7611 46 7825 17 8003 136 8082 115 8204 92 7615 37 7830 17 8005 136 8084 126 8205 92 7620 47 7831 17 8013 143 8086 127 8206 92 7620100 47 7832 17 8017 136 8087 80 8207 92	7606	18	7820	17	7938	88	8076	121	8186	127
7609 18 7823 17 7944 88 8080 34 8199 120 7610 43 7824 17 7945 88 8081 114 8200 92 7611 46 7825 17 8003 136 8082 115 8204 92 7615 37 7830 17 8005 136 8084 126 8205 92 7620 47 7831 17 8013 143 8086 127 8206 92 7620100 47 7832 17 8017 136 8087 80 8207 92	7607	18	7821	17	7939	88	8077	120	8195	126
7610 43 7824 17 7945 88 8081 114 8200 92 7611 46 7825 17 8003 136 8082 115 8204 92 7615 37 7830 17 8005 136 8084 126 8205 92 7620 47 7831 17 8013 143 8086 127 8206 92 7620100 47 7832 17 8017 136 8087 80 8207 92	7608	18	7822	17	7943	88	8079	120	8197	118
7611 46 7825 17 8003 136 8082 115 8204 92 7615 37 7830 17 8005 136 8084 126 8205 92 7620 47 7831 17 8013 143 8086 127 8206 92 7620100 47 7832 17 8017 136 8087 80 8207 92	7609	18	7823	17	7944	88	8080	34	8199	120
7615 37 7830 17 8005 136 8084 126 8205 92 7620 47 7831 17 8013 143 8086 127 8206 92 7620100 47 7832 17 8017 136 8087 80 8207 92	7610	43	7824	17	7945	88	8081	114	8200	92
7620 47 7831 17 8013 143 8086 127 8206 92 7620100 47 7832 17 8017 136 8087 80 8207 92	7611	46	7825	17	8003	136	8082	115	8204	92
7620100 47 7832 17 8017 136 8087 80 8207 92	7615	37	7830	17	8005	136	8084	126	8205	92
	7620	47	7831	17	8013	143	8086	127	8206	92
7621 47 7833 17 8018 136 8088 80 8208 92	7620100	47	7832	17	8017	136	8087	80	8207	92
	7621	47	7833	17	8018	136	8088	80	8208	92



PN	Page	PN	Page	PN	Page	PN	Page	PN	Page
8209	92	8262	110	8366	124	8489	123	9038B	104
8210	92	8263†	110	8367	124	8498	123	9039B	104
8211	92	8264	116	8369	125	8499	123	9040B	104
8212	92	8265	119	8371	110	8505	120	9041B	104
8214	152	8266	90	8372	110	8506	121	9077	125
8216	88	8267	90	8373	110	8507	121	9093	125
8217	152	8268	90	8374	110	8508	127	9159	26
8218	88	8271	110	8375	115	8509	120	9160	39
8219	88	8272	110	8376	115	8511	118	9176B	104
8220	88	8273	110	8377	116	8512	120	9177B	104
8221	88	8274	110	8378	116	8561	119	9216	99
8222	88	8275	88	8379	116	8562	123	9217	99
8230	88	8278	89	8380	116	8564	121	9218	99
8231	88	8280	34	8381	117	8565	121	9228	147
8232	88	8282	88	8382	117	8566	123	9230	147
8233	88	8283	88	8385	114	8567	123	9231	147
8234	88	8284	88	8386	125	8578	118	9233	147
8235	142	8285	88	8401	114	8579	119	9353	137
8236	142	8286	88	8402	115	8580	118	9354	137
8237	143	8287	88	8403	115	8585	121	9630	137
8238	143	8288	88	8405	120	8588	121	9804	164
8240	136	8289	88	8406	121	8589	123	9914	164
8243	136	8290	88	8407	121	8598	123		
8244	137	8291	88	8408	127	8599	123		
8245	137	8292	88	8409	120	8686	34		
8246	137	8293	89	8410	143	8689	34		
8247	143	8294	89	8411	118	8690	34		
8248	142	8295	89	8412	120	8693	34		
8251	142	8296	89	8461	119	9001E	28		
8252	136	8297	89	8462	123	9002E	28		
8253	136	8298	89	8464	121	9003E	28		
8254	136	8299	89	8465	121	9004E	28		
8255	147	8300	88	8466	123	9009	124		
8256	147	8357	124	8467	123	9010	124		
8257	147	8358	124	8478	118	9011	124		
8258	137	8359	124	8479	119	9012	35		
8259	90	8361	125	8480	118	9019	125		
8260	90	8363	125	8485	121	9030B	104		
8261	110	8365	124	8488	121	9031B	104		

Ingress Protection (IP) Ratings Guide

Example:

An IP65 rating can be determined using the adjacent table and example:

- The first number of the rating example,
 6, in the gray column means the enclosure is dust tight
- The second number of the rating example,
 5, in the blue column means the enclosure is protected against jets of water

The IP rating system was established by the International Electrotechnical Commission (IEC), an organization for international standards and conformity assessment. The IEC collaborates closely with the International Organization for Standardization (ISO). A complete description of the IP ratings and associated tests is found in IEC Publication 529. Although these ratings were initially developed as a way to classify enclosures, they now provide a convenient, practical way to compare levels of sealing. Many electrical products have an Ingress Protection (IP) rating which identifies the environmental factors needing consideration prior to the product's installation.

This is important when deciding when to mount products in a dry and clean environment versus a wet and/or dusty environment. The IP rating indicates the degree of protection provided. The numbers following IP represent levels of sealing and can range from no protection to full protection against dust and water. The table provides a description of the protection at each level.

