



CATALOGUE
english

EIKON





EIKON

EIKON TACTIL

EIKON EVO

EIKON CHROME

EIKON TOTAL LOOK

FOUR AESTHETIC DIMENSIONS.

Elegance, excellence, value: there's no such thing as a single idea of luxury. Luxury is a dimension with many interpretations, all in constant evolution. And if we're talking about energy, this dimension is Eikon.

Every concept of luxury finds its perfect expression in Eikon: technological, chic, sophisticated, essential.

Four product lines with different dimensions, finishing and functions, but sharing one common denominator: controlling energy superlatively.



EIKON TACTIL



THE FUTURE TAKES SHAPE.

A technological jewel as pure as a diamond and as light as a feather.

TOUCH FUNCTION.

The lightest touch, and energy is under control.

PROXIMITY SENSOR.

The electronic controls sense when you are near the device and switch it on, ready for use.

PURE CRYSTAL.

A precious material, in 4 colours: white diamond, black diamond, pearl grey and aqua.

LUMINOSI

BEVELLED CRYSTAL



Black diamond



White diamond




Aqua



Pearl grey

EIKON EVO

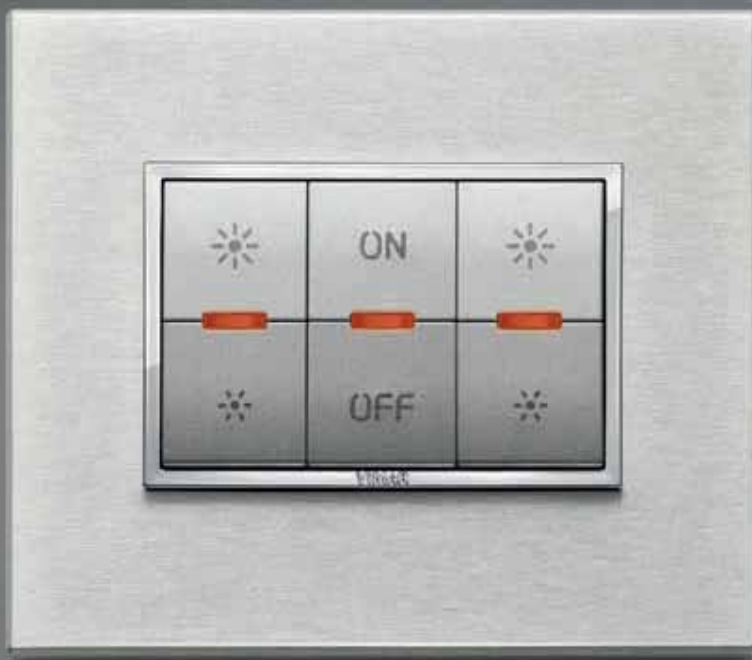

LUXURY UNVEILED.

With a style and a technology that add unique, irresistible value to all your everyday gestures.

ULTRA-SLIM PROFILE.

A lightweight, slim silhouette that stands out just a few millimetres from the wall, with axial buttons.

ELEGANT GEOMETRIES.

Shapes that are designed to catch the eye, rigorous and elegant, in sizes that are unobtrusive on the wall.

EXCLUSIVE MATERIALS.

Eight different precious materials, capturing the latest interior living trends.

PRIMARI

ANODIZED ALUMINIUM



Brilliant aluminium



Next grey



Neutral bronze



Dark bronze



Lava grey

ESCLUSIVI

REFINED ALUMINIUM



Silver



Titanium



Polished gold



Satin gold



Black sapphire



Total polished gold



Total satin gold

RAFFINATI

NATURAL LEATHER



Cream



Tobacco

SPECIALI

CORIAN®



Glacier ice

SCOLPITI

CARVED STONE



Carrara white



Grey quartzite



Natural split slate

NATURALI

SOLID WOOD



White oak



Italian walnut



Wengé

ESSENZIALI

TOTAL ALUMINIUM AND CRYSTAL



Total white



Total black



Total white diamond



Total black diamond

LUMINOSI

BEVELLED CRYSTAL



Silver ice



Bronze mirror



White diamond



Aqua



Pearl grey



Opal brown



Black diamond

EIKON CHROME



DAZZLING DETAILS.

A new definition of style where detail is supreme.

CHROME FRAME.

Shiny and smooth, a distinctive feature surrounding buttons and controls.

LINEAR OR ROUNDED?

Eikon Chrome responds to all needs with its Classic and Round designs.

MATERIALS AND COLOURS.

Prestige also comes in the five selected materials and the many colour variants.

BRIGHT

VARNISHED METAL - CLASSIC



Arctic white



Antique white



Metallic champagne



Metallic titanium



Metallic silver



Metallic Siena



Metallic anthracite



Matt silver



Matt titanium



Matt anthracite

VARNISHED METAL - ROUND



Arctic white



Antique white



Metallic champagne



Metallic titanium



Metallic atlantic grey



Metallic silver



Metallic anthracite



Matt silver



Matt titanium



Matt anthracite

REFINED

REFINED METAL - CLASSIC



Satin gold



Satin nickel



Polished gold

REFINED METAL - ROUND



Satin gold



Satin nickel



Polished gold



Satin chrome

WOOD

SOLID WOOD - CLASSIC



African wengé



White oak



Italian walnut

SOLID WOOD - ROUND



American cherrywood



White oak



Italian walnut

INOX

STAINLESS STEEL - CLASSIC



Brushed inox



Brushed inox

GLASS

CRYSTAL - CLASSIC



Black ice



White ice



Silver mirror

EIKON TOTAL LOOK



HARMONY IN COORDINATING COLOURS.

Three essential colours for cover plates, frames, buttons and controls.

THREE COLOURS.

White, anthracite grey and Next silver: buttons and devices are fully colour-coordinated with the cover plates and frames.

TWO SHAPES.

Rigorous profiles or sinuous lines? Each design has its own style.

UNIQUE MATERIAL.

Metal, a precious functional and design choice.

BRIGHT

VARNISHED METAL - CLASSIC



Matt anthracite



Arctic white



Matt silver

VARNISHED METAL - ROUND



Matt anthracite



Arctic white



Matt silver


General features

Versatile and modular solutions for an extensive installation

Control equipment and socket outlets how and where you want them: a wide range of devices with great installation versatility that meet major international standards. Thanks to the different modularity of the devices (from 1 to 3 modules), different installation standards (with 60,3 mm and 71 mm distance between centres and cover plates with 1 to 21 modules) and fixing the device to the mounting frame (inserting/removing) it is possible to design installation solutions with a high level of safety.

Plack-clack hooking system

A Vimar patent that makes it quick and easy to fit the lighting point components (devices and mounting frames) to the cover plate. The plack-clack is a hooking system with an extra-strong mounting frame (with a metal core) and exceptional rigidity, simplifying the front-on fitting and removal of devices. The system makes it possible to work on the installation without removing the mounting frame from the wall. And the mounting frame is just 2 mm thick, so the cover plate sticks out far less from the wall helping to assure the desired “flush to the wall” installation.

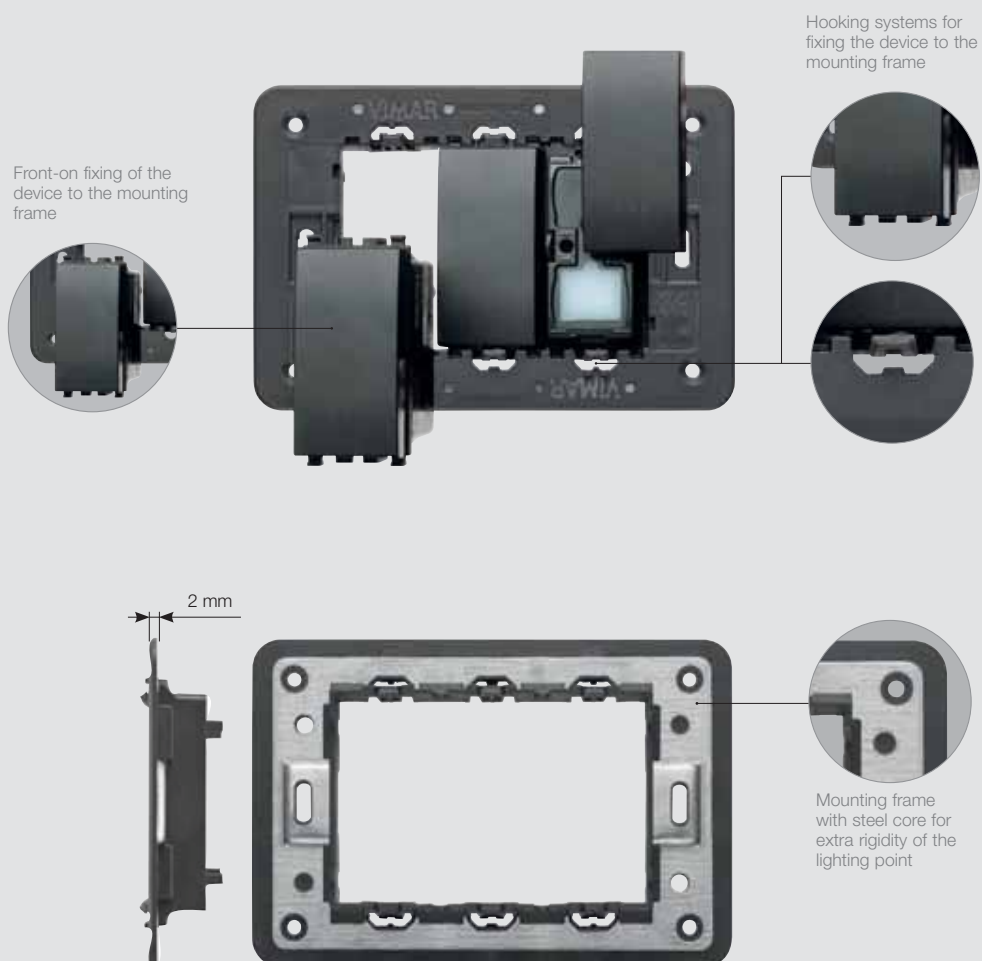

General features


Modular devices and cover plates

The modular device with from 1 to 3 modules lets you install multiple devices of different modularity in a single mounting frame, up to a composition of 21 modules for cover plates size 7+7+7. The mounting frame that installs the devices is equipped with interlocking teeth that provide strong and reliable fixing for each single device and allows perfect alignment between devices such as to create an orderly and visually pleasing stylistic effect. The device can also be fixed front-on to the mounting frame, allowing work on the installation at any time without having to remove the mounting frame from the box.




Flexible installation


The images show how different pairs of devices from 1 to 3 modules can be installed in the same mounting frame.



3 x 1-module



1 x 1-module and 1 x 2-module



1 x 3-module

General features


Controls.

Intelligent and functional technologies for maximum comfort.

There are many different ways of activating a device: axial or rocker technology, swipe or touch controls, each characterises by high precision and silent technology. In addition, the ergonomics of the buttons accompanies and simplifies control gestures, while the backlighting allows constant and intuitive legibility of the functions associated with each control.


Different activation types to meet all application requirements.

Electronic, rocker, axial, infra-red, swipe or touch controls combine technological precision and aesthetic refinement. Movement of the controls by means of the buttons produces an imperceptible muted sound thanks to the Soft Action system, with a leaf-spring contact with a joint-pin mechanism that dampens the movements and electrical bounce, muting the sound and softening the movement.

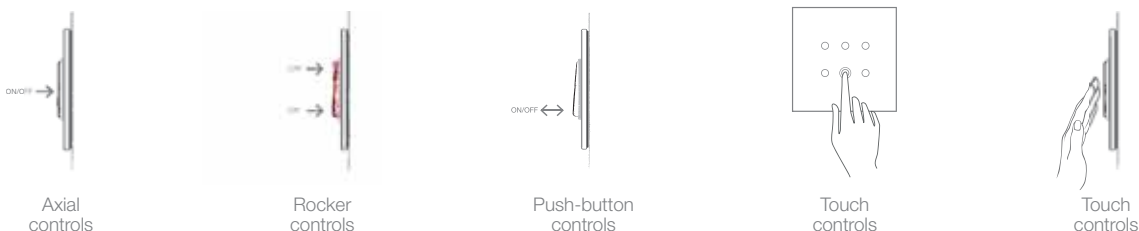

Soft action system: precision and silence.

The transfer of the movement from the button to the mechanism has been completely redesigned, with a worldwide-patented joint-pin system (1). Striking the button has been cushioned with co-moulded rubber elements (2). The spring geometry of the moving contact of the mechanism performs a natural cushioning function, reducing its electrical recoils and wear, also thanks to a large increase in the quantity of silver of the contacts.

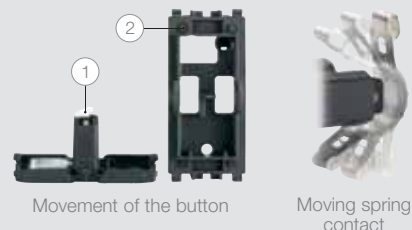

Eikon Tactil: electronic controls with proximity sensor.

Eikon Tactil is intelligence, it reads your mind: the proximity sensor brings home automation devices to life as soon as you come near the device, one step ahead of your movements. The controls light up, ready for your touch. Vimar technology makes these controls recognise any touch precisely and immediately, giving both visual and acoustic feedback.



Backlighting and customization.

The backlighting with different colours makes the controls visible even in the dark, while the symbols, either laser-engraved or customized on site, always give a clear indication of the various functions.



Button colour variant.

The Eikon controls come in three different colours: from light white to rigorous anthracite grey, passing through elegant Next silver. In the name of a technology that has never been separated from design.



General features

Wiring systems

There are two types of Vimar wiring systems to satisfy all installation standards. Depending on the type of cable (solid, stranded or flexible) and the cable cross-section (from 0,5 to 2,5 mm² for signalling circuits and from 1,5 to 2,5 mm² for power circuits), there is a system used to secure the cable when fixing.

Wiring with screw clamps

The wiring with screw terminals consists of clamps with a curved metal plate that locks the cable via a crosshead screw and is ideal for flexible or semi-rigid cables with a cross-section of from 0,5 mm² to 2,5 mm².

Screw clamps.
Composed of a curved metal plate that clamps the cable by means of a crosshead screw.



Use of cables with different cross-sections.
Wiring with a flexible or semi-rigid cable with a cross-section of from 0,5 mm² to 2,5 mm².





Special housing for the signalling unit.
Special housing for the signalling unit, backlighting and visibility of controls even in the dark.





Smartfix rapid wiring

Smartfix rapid wiring is a Vimar patent with screwless terminals with separate terminals and bistable levers. The contact lever is used to fit and/or remove solid, stranded and flexible cables even with different sizes and the separate terminals allow the independent management of each cable, facilitating specific maintenance without compromising the hold on the already wired cables.


Smartfix patent.
The Smartfix patented terminals have AISI 301 steel spring contacts, with an innovative geometry and separate, independent terminals. This solution allows you both to independently manage cable inputs and wire cables of different types and cross-sections in the same terminal, ensuring they are fully secure.



Use of cables with different cross-sections.
With the separate spring terminals (Smartfix patent) you can wire cables with different cross-sections on the two inputs of the same terminal even at the same time. Secure fastening is assured for both signal circuit cables with cross-section 0,5-2,5 mm² and power circuit cables with cross-section 1,5-2,5 mm².

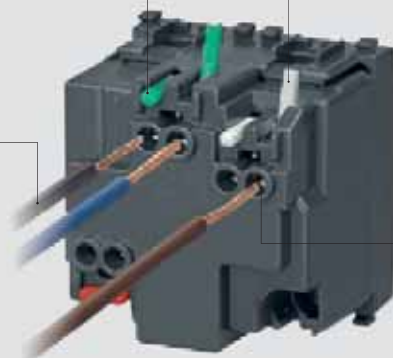

Bistable levers on the terminal.
A bistable lever works for each cable input; when raised, this opens a spring contact, and stranded or flexible cables can be inserted or removed very simply. Each one managing a specific cable input, the levers make maintenance easier without risking the secure fastening of the cables already wired.



Management of independent cable inputs.
With the separate spring terminals you can manage two cable inputs independently on the same terminal, wiring or removing cables of different types and cross-sections on one input, without risking the secure fastening of the cables on the other input.



General features

Devices for supervision.

The 10" multimedia Video Touch screen manages and controls everything that happens inside and outside the home, with high-definition images and coordinated, customised graphics. The web interface offers remote control via smartphone, PC and tablet. The 4,3" video touch screen offers complete control over all the video door entry and home automation functions.



10" multimedia video touch screen



4,3" Full Flat video touch screen

Devices for control and power supply.

Control a light, activate a home automation scenario, manage different current loads, transmit and receive multimedia data: Vimar's residential series offers a range of functions that comply with this and numerous other energy uses. With special attention to safety, especially for the kids, and more specific requirements, including compliance with international standards.



Eikon Tactil home automation control



Home automation controls



Load control



USB, HDMI, RCA sockets



Data ports



Infrared switches

General features

Devices for energy efficiency and safety.

Each residential range of products contains devices able to guarantee personal safety, prevent damage to home appliances and maintain the integrity of the rooms in your home. These properties are integrated with a range of innovative functions that allow you to optimise energy consumption while guaranteeing well-being and comfort.



Methane gas detector



Touch timer-thermostat



Load control



Emergency fitting



Interlocked socket



Radio frequency controls

Solutions for international use.

Wherever you are in the world, Eikon supplies sockets with different standards, modular controls and cover plates to help you design, organise and manage energy in compliance with the systems used in over 100 countries around the world.



Installation versatility



Standard foreign socket outlets



Different modules

HOME AUTOMATION: ENERGY EFFICIENCY, SAFETY AND COMFORT WORK TOGETHER.

Inside a home automation building the various functions dialogue with each other comprehensively and continually, facilitating large as well as small daily actions and ensuring greater energy efficiency, safety, comfort and control. Many solutions and all controlled from a single point. Centralized supervision via stylish touch screens to optimize energy consumption, check who is at your door, regulate the climate and lighting, move the roller shutters, activate or deactivate the burglar alarm system, view the filming of the video surveillance cameras or manage the sound system. Because we want you to experience your home in the best way possible.





ENERGY EFFICIENCY

Monitor and view the energy consumed by single loads, efficiently control the temperature for greater energy awareness.



SAFETY AND SECURITY

A simple and effective alarm system, devices for detecting people entering, a wide range of devices to keep the rooms under control.



COMFORT

The desired temperature throughout the house, controlling and programming it for different rooms and home automation controls to create preset scenarios depending on your needs.



CONTROL

All the functions in the dwelling can also be controlled locally by numerous devices, to personalize the room according to the needs of the moment.

BUILDING AUTOMATION SYSTEM FOR EFFICIENCY, SAFETY AND SECURITY, COMFORT AND CONTROL OF BUILDINGS.

From lighting to access control, from monitoring consumption to dialogue with other devices in the structure, it can all be managed via Well-contact Plus. A unique system developed on the KNX standard that enables programming, coordinating and supervising all the functions in the building whether it be an office, hotel, shop or gym.





ENERGY EFFICIENCY

Integration with the systems already present in the structure allows real benefits, avoids wasting energy and improves wellness.



SAFETY AND SECURITY

Transponder reader to open the electrical lock and turn on the lights in the rooms only for authorized persons.




COMFORT

KNX controls to automate all the functions of the building from the roller shutters to the lighting.



CONTROL

Supervising and controlling a room or the entire building via stylish devices featuring intuitive icons.

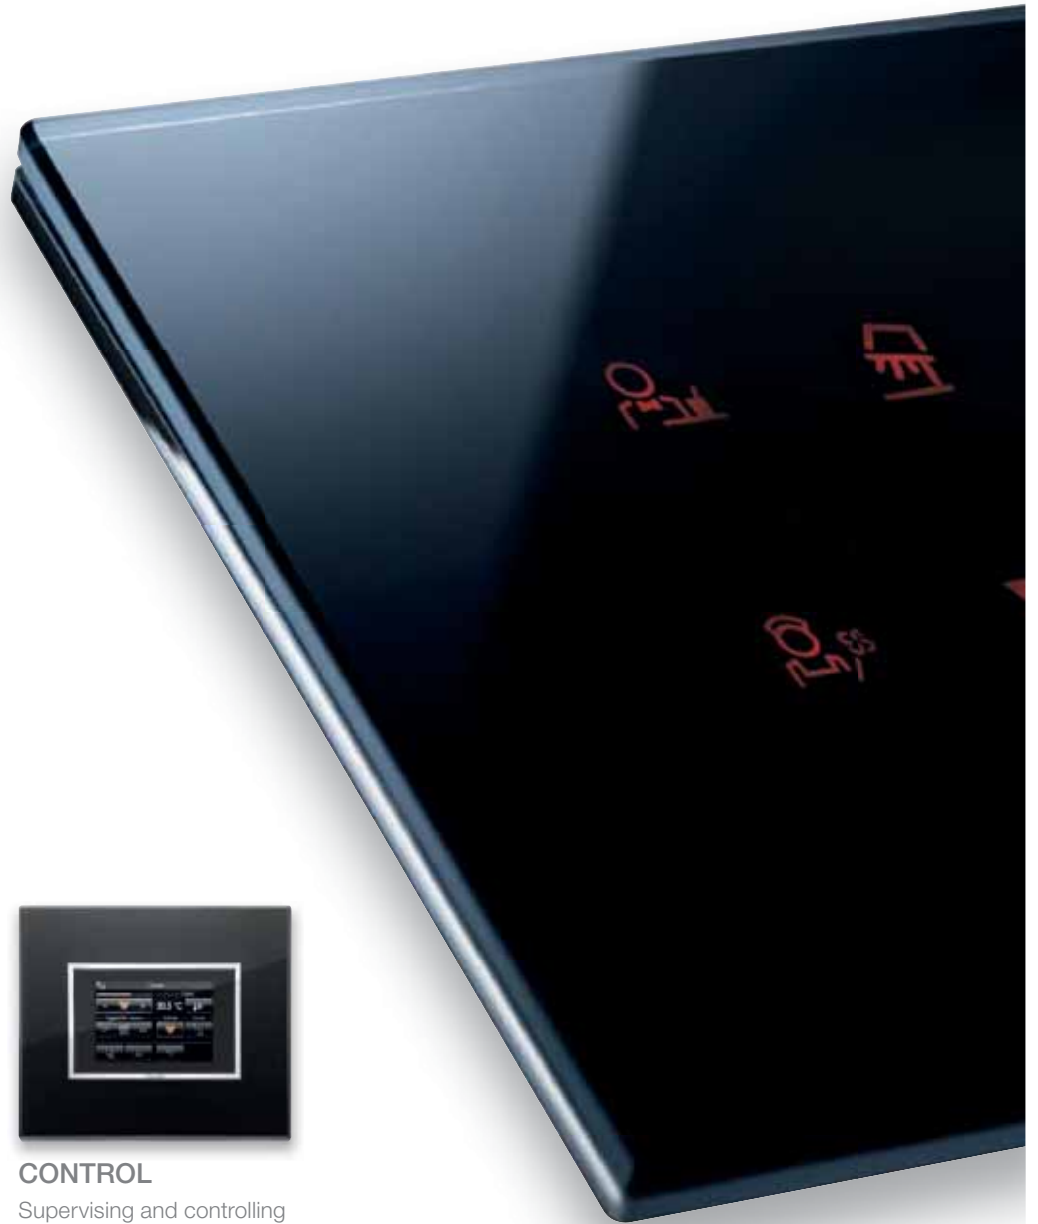

Mounting features for Eikon Tactil

3-module installation

Cover plates.

Large, square size, from 2 to 4 modules. In crystal and 4 colours: white diamond, aqua, pearl grey and black diamond.



Electronic controls.

1, 2 and 3 back-lit modules. The standard controls have amber backlighting when installed in a conventional electrical system. The backlighting can be programmed with RGB colours when mounted in a By-me or Well-contact Plus automation systems.




Mylar adhesive labels.

The controls can be customised using the Mylar adhesive labels with a range of symbols, all back-lightable.









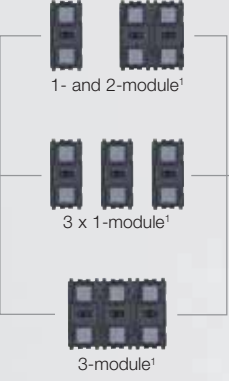


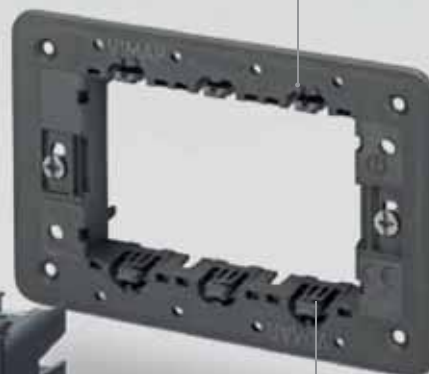

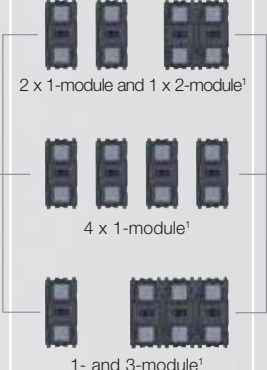

Ultra-slim support.

Steel core just 2 mm thick, with galvanised protection, for installation with minimum stand-out.



Plack-clack system.

The Vimar-patented Plack-clack system fixes quickly and easily the lighting point components to the cover plate by inserting and removing the devices from the front.


Composition	Box	Frame	Device	Cover plate
 <p>2 modules</p>	 <p>Flush mounting</p>	 <p>2-module with/without screws or with claws</p>	 <p>2 x 1-module¹ 1 x 2-module¹</p>	 <p>2 modules</p>
 <p>3 modules</p>	 <p>Flush mounting</p>	 <p>With screws</p>	 <p>1- and 2-module¹ 3 x 1-module¹ 3-module¹</p>	 <p>3 modules</p>
 <p>4 modules</p>	 <p>Flush mounting</p>	 <p>With screws</p>	 <p>2 x 1-module and 1 x 2-module¹ 4 x 1-module¹ 1- and 3-module¹</p>	 <p>4 modules</p>

* For other combinations, see the installation types from page 98

¹ To customise with Mylar adhesive labels (21847)

Mounting features for Eikon Evo

3-module installation

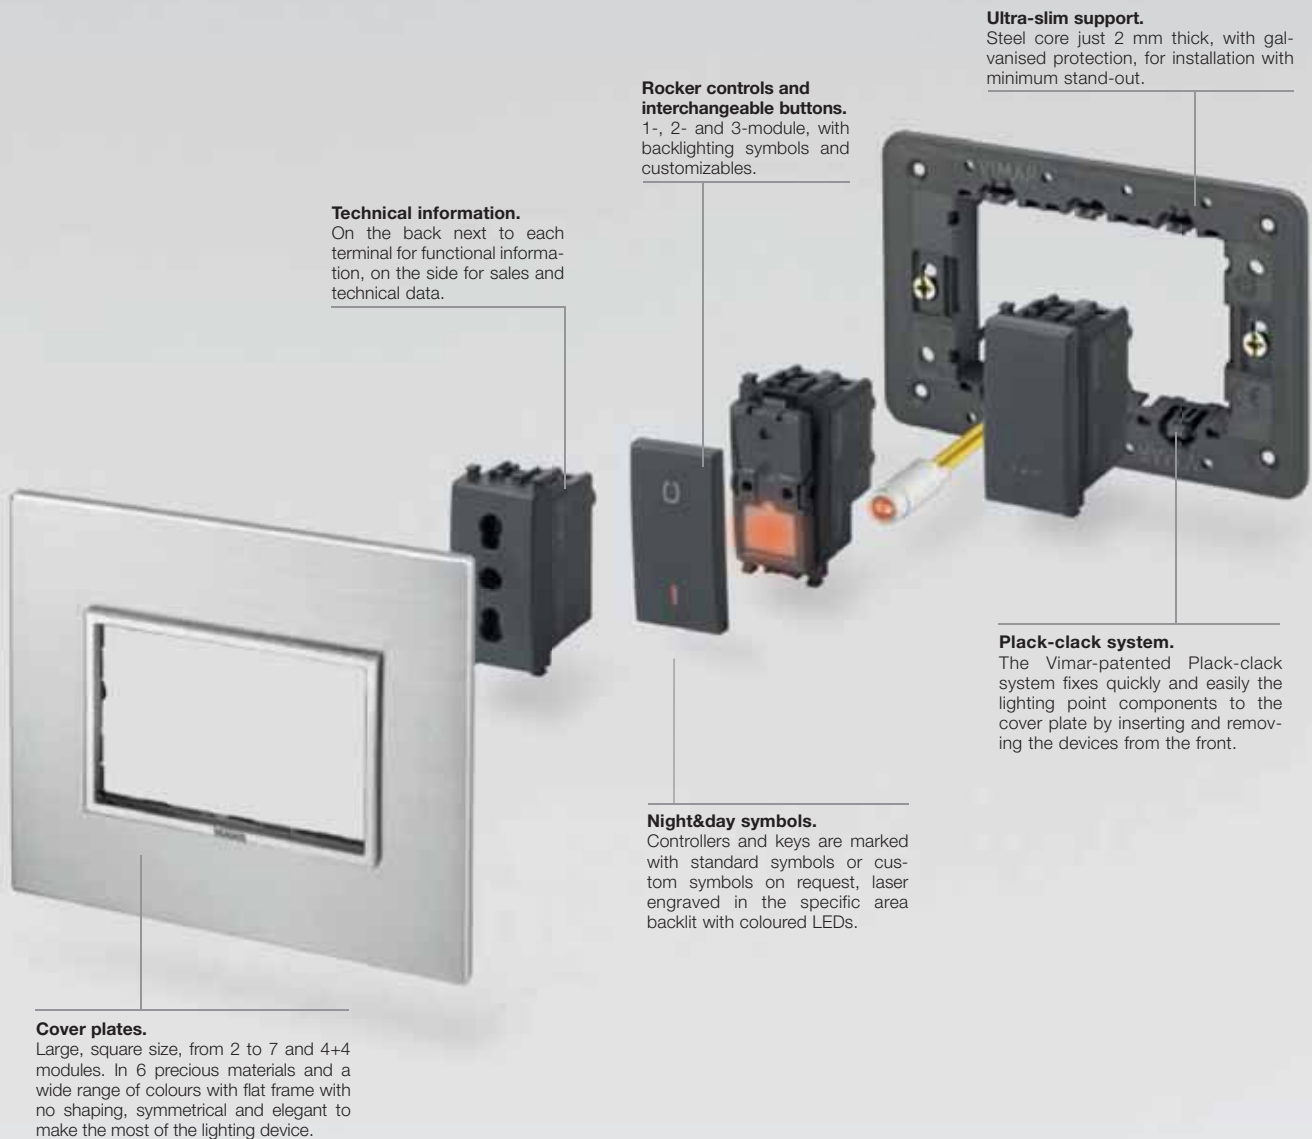

SCREWLESS TERMINALS

For solid, stranded and flexible cables. Quick, easy and safe.

The quick-wiring terminals can hold rigid, semi-rigid and flexible cables, responding to all installation needs. Secure fastening is assured for both signal circuit cables with cross-section 0,5-2,5 mm² and power circuit cables with cross-section 1,5-2,5 mm².





SCREW TERMINALS

Ergonomic contacts.

The metal plate in the terminals is curved: a Vimar refinement allowing the wire to be held in place until clamped with the screw. Secure fastening is assured for both signal circuit cables with cross-section 0,5-2,5 mm² and power circuit cables with cross-section 1,5-2,5 mm².



Composition	Box	Frame	Device	Cover plate
 <p>2 modules</p>	 <p>Flush mounting ø 60 mm or 56x56 mm</p>	 <p>With/without screws</p>	 <p>2 x 1-module 1 x 2-module</p>	 <p>2 modules</p>
 <p>From 3 to 7 modules</p>	 <p>Flush mounting from 3 to 7 modules</p>	 <p>With screws</p>	 <p>3 x 1-module 1- and 2-module 1 x 3-module</p>	 <p>From 3 to 7 modules*</p>
 <p>10" multimedia video touch</p>	 <p>Semi-flush mounting</p>			 <p>Cover plate for multimedia video touch 10"</p>
 <p>4,3" Full Flat touch screen</p>	 <p>Flush mounting</p>	 <p>With screws</p>	 <p>4,3" Full Flat touch screen</p>	 <p>8 modules cover plate*</p>
 <p>4,3" Full Flat video touch</p>			 <p>2 x 1-module and 1 x 2-module 4 x 1-module</p>	

* For other combinations, see the installation types from page 99

Mounting features for Eikon Evo

Installation with 71 mm distance between centres (German and French standard)

Ultra-flat mounting frame with metal core.

Just 2 mm thick, it guarantees strength, flexibility and electric insulation. The metal core has a galvanised, anti-oxidant coating and attaches devices quickly and easily. Wide range of installation possibilities because of the 71 mm between centres.

Plack-clack system.

The Vimar-patented Plack-clack system fixes quickly and easily the lighting point components to the cover plate by inserting and removing the devices from the front.

Interchangeable buttons
1- and 2-module, with backlighting symbols and customizables.

































Technical information

On the back next to each terminal for functional information, on the side for sales and technical data.

Multi-module cover plates


Wide range of cover plates, from 2+2 to 2+2+2+2 modules, for safe and functional vertical and horizontal installation for any country.









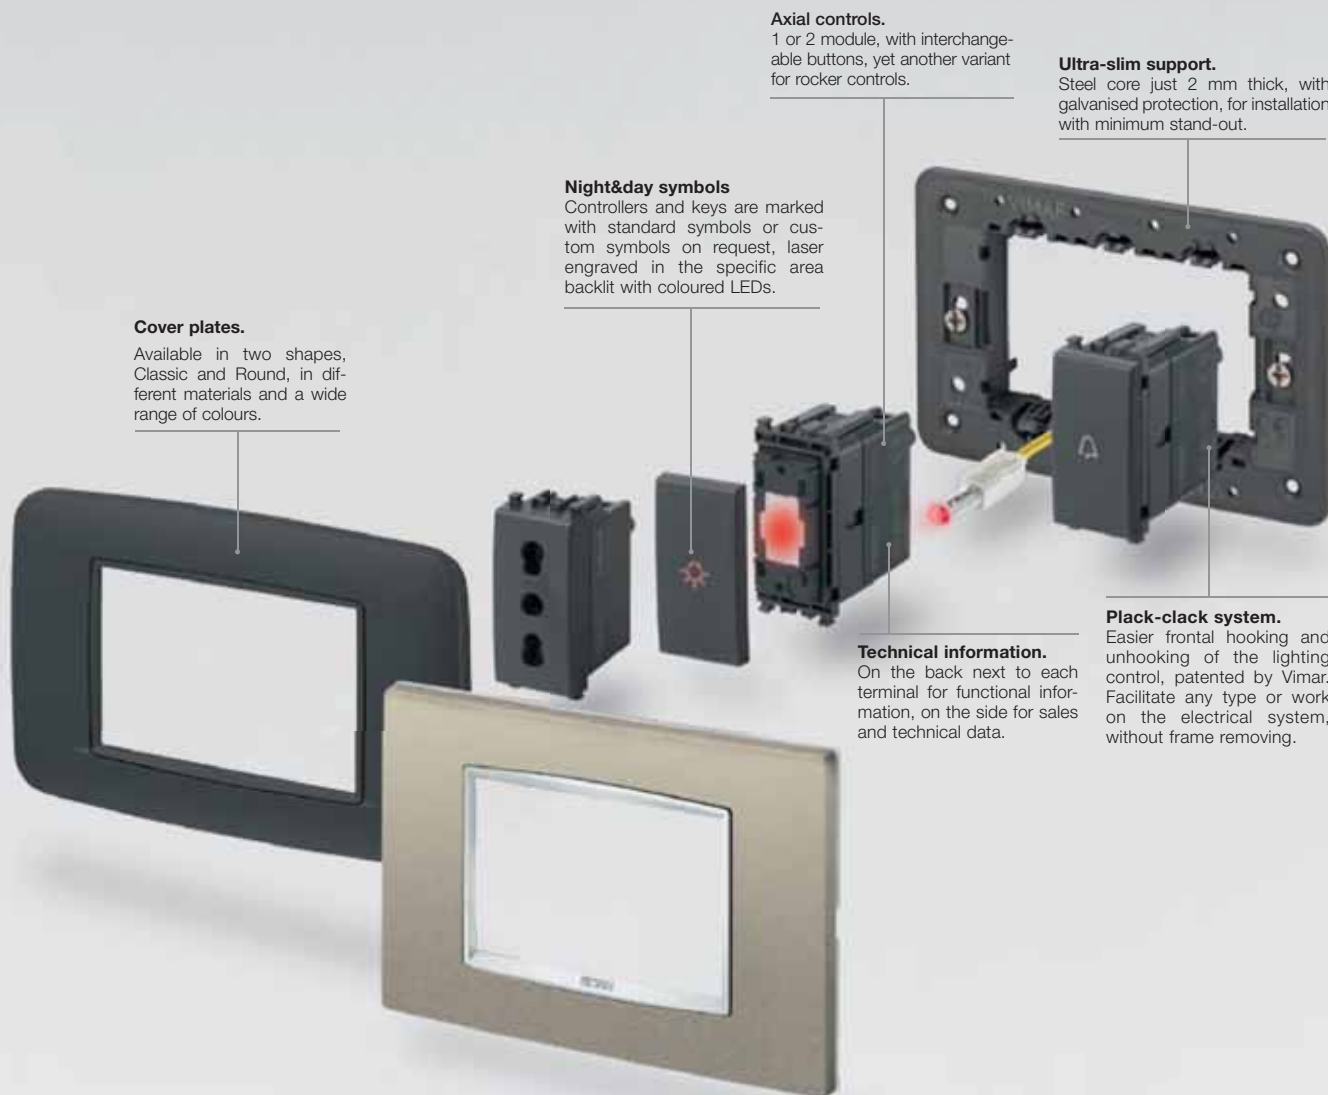



























Composition	Box	Frame	Device	Cover plate
 <p>2+2 modules</p>		 <p>With/without screws with 71 mm between centres</p>	 <p>2 x 2 modules</p>	 <p>2+2 modules, vertical installation</p>
		 <p>With/without screws with 71 mm between centres</p>	 <p>2 x 2 modules</p>	 <p>2+2 modules, horizontal installation</p>
				
 <p>2+2+2 modules</p>		 <p>With/without screws with 71 mm between centres</p>	 <p>3 x 2 modules</p>	 <p>2+2+2 modules, vertical installation</p>
		 <p>With/without screws with 71 mm between centres</p>	 <p>3 x 2 modules</p>	 <p>2+2+2 modules, horizontal installation</p>
				
 <p>2+2+2+2 modules</p>		 <p>With/without screws with 71 mm between centres</p>	 <p>4 x 2 modules</p>	 <p>2+2+2+2 modules, vertical installation</p>
		 <p>With/without screws with 71 mm between centres</p>	 <p>4 x 2 modules</p>	 <p>2+2+2+2 modules, horizontal installation</p>
				

* For other combinations, see the installation types from page 102

Mounting features for Eikon Chrome and Eikon Total Look

3-module installation



Composition	Box	Frame	Device	Cover plate
 Panel mounting	 Panel mounting	 With screws	 1-module	 From 1 to 2 modules Classic or Round* (only for Eikon Total Look)
 From 1 to 2 modules	 Flush mounting  Surface mounting	 2-module with/without screws or with claws	 2 x 1-module  1 x 2-module	 From 1 to 2 modules Classic or Round*
 For 2 central modules	 Flush mounting  Surface mounting	 With screws  With screws	 2 x 1-module  2-module  1 and 2-module  3 x 1-module  1 x 3-module	 2-central-module Classic or Round*  From 3 to 7 modules Classic or Round*
 8 modules	 Flush mounting	 With screws	 Touch screen 4,3 "Energy"  2 x 1-module and 1 x 2-module  4 x 1-module	 8 modules Classic or Round*
 Table mounting	 Table box	 With screws	 1 and 3-module	 4 and 7 modules Classic or Round*

* For other combinations, see the installation types from page 104

Mounting features for Eikon British standard

Modular devices mounting



Cover plates

Wide range of colours and combinations:
EIKON EVO
EIKON CHROME
EIKON TOTAL LOOK

Technical information

On the back next to each terminal for functional information, on the side for sales and technical data.



Interchangeable buttons

One or two modules, with backlit symbols and customizable.

Customisation

Controllers and keys are marked with standard symbols or custom symbols on request, laser engraved in the specific area backlit with coloured LEDs.



Lowered frame.

Stainless steel mounting frame with earth terminal, with lugs for an easy and fast installation of the devices from the front. Available also for 1 module with built-in blank module.

Monobloc device (with built-in mounting frame)



Cover plates

For vertical and horizontal mounting

Socket outlet

With SICURY patented system to prevent accidental contacts.



Monobloc device
Built-in mounting frame.

Fixing lugs
Possibility of horizontal and vertical mounting of device.




























Signalling LED

Signalling of power supply, with integrated signalling unit, perfectly visible by day and night.

Matching possibility



Joining possibility with minimum 25 mm of distance between boxes

Composition	Box	Frame	Device	Cover plate
 <p>1 module, modular mounting (1-gang)</p>	 <p>1-gang mounting box Fixing centres: 60,3 mm</p>	 <p>1-module with screws M 3,5</p>	 <p>1-gang switch, 1 module</p>	 <p>From 1 to 2 modules*</p>
 <p>2 modules, modular mounting (1-, 2-, 3-gang switch)</p>	 <p>1-gang mounting box Fixing centres: 60,3 mm</p>	 <p>2-module with screws M 3,5</p>	 <p>3-gang switch, 2 modules</p>  <p>2 x 1-gang switches, 1 module</p>  <p>1-gang switch, 2 modules</p>	 <p>From 1 to 2 modules*</p>
 <p>monobloc device or 3 modules modular mounting</p>	 <p>1-gang mounting box Fixing centres: 60,3 mm</p>	 <p>3-module with screws M 3,5</p>	 <p>Socket outlet monobloc device</p>  <p>ON/OFF unit monobloc device</p>  <p>1 x 2-module + 1 x 1-module</p>	 <p>monobloc horizontal mounting*</p>  <p>monobloc vertical mounting*</p>  <p>3 modules*</p>
 <p>monobloc device or 5 modules modular mounting</p>	 <p>2-gang mounting box Fixing centres: 120,6 mm</p>	 <p>5-module with screws M 3,5</p>	 <p>2-gang switched socket outlets monobloc device</p>  <p>2 x 2-module + 1 x 1-module</p>	 <p>5 modules*</p>

* For other combinations, see the installation types from page 101 and 108

Devices

EIKON TACTIL

Blank modules



21041
Blank module.
Depth: 11 mm

Electronic devices



21119
NO 6 A 230 V~ relay output, supply voltage 230 V~ 50/60 Hz.
Depth: 42,5 mm



21174
For $\cos\phi$ 0,6 2 A 230 V~ roller shutters laths adjustment.
Depth: 42,5 mm



21122
Electronic remote control, 2 push buttons for the remote control of a single or centralized control.
Depth: 42,5 mm

230 V~ 50 Hz dimmers



21134
MASTER, 40-500 W, 40-300 VA, CFL 10-200 W, LED 3-200 W.
Depth: 42,5 mm

By-me - Electronic devices



21520
4 programmable buttons for 2 single controls or scenes - 2 modules.
Depth: 38 mm



21540
6 programmable buttons for 3 single controls or scenes - 3 modules.
Depth: 38 mm

Well-contact Plus - Electronic devices



21840
4 independently programmable buttons for single controls or scenes, KNX standard - 2 modules. Depth: 38 mm



21860
6 independently programmable buttons for single controls or scenes, KNX standard - 3 modules. Depth: 38 mm

Labels



21847
8 sheets of stickers with symbols and words for Eikon Tactil devices

Well-contact Plus - Access control system



21457
Eikon Tactil touch transponder card reader, KNX standard, 2 relay outputs NO 4 A 24 V~, 2 inputs, 12-24V~ 50/60 Hz and 12-24 Vdc (SELV) - 3 modules. Supplied without transponder card.
Depth: 36,5 mm



21666.70
Electronic plate for 21457, white diamond - 3 modules



21666.71
Electronic plate for 21457, aqua - 3 modules



21666.73
Electronic plate for 21457, pearl grey - 3 modules



21666.76
Electronic plate for 21457, black diamond - 3 modules

Devices

Grey	White	Next
------	-------	------

Blank modules and cable outlets



20041
Blank module.
Depth: 11 mm

20044
Cable outlet.
Depth: 16,6 mm



20041.B
Blank module.
Depth: 11 mm

20044.B
Cable outlet.
Depth: 16,6 mm



20041.N
Blank module.
Depth: 11 mm

20044.N
Cable outlet.
Depth: 16,6 mm



20042
Blank module - 2 modules.
Depth: 11 mm



20042.B
Blank module - 2 modules.
Depth: 11 mm



20042.N
Blank module - 2 modules.
Depth: 11 mm



20046²
Cable outlet + terminalbar 20 A.
Depth: 22,1 mm

20047²
45 A 1-gang cable outlet supplied with cover plate.
Depth: 20 mm



20046.B²
Cable outlet + terminalbar 20 A.
Depth: 22,1 mm

20047.B²
45 A 1-gang cable outlet supplied with cover plate.
Depth: 20 mm



20046.N²
Cable outlet + terminalbar 20 A.
Depth: 22,1 mm

20047.N²
45 A 1-gang cable outlet supplied with cover plate.
Depth: 20 mm



20049.L³
13 A, 1-gang, switched and fused connection unit. Depth: 20,4 mm




20049.L.B³
13 A, 1-gang, switched and fused connection unit. Depth: 20,4 mm




20049.L.N³
13 A, 1-gang, switched and fused connection unit. Depth: 20,4 mm

1P 1-way switches 250 V~ (lightable^o)



20001
16 AX.
Depth: 25 mm

20001.2
16 AX
- 2 modules.
Depth: 25 mm




20001.B
16 AX.
Depth: 25 mm

20001.2.B
16 AX
- 2 modules.
Depth: 25 mm



20001.N
16 AX.
Depth: 25 mm


20001.2.N
16 AX
- 2 modules.
Depth: 25 mm



20002
20 AX.
Depth: 25 mm

20002.2
20 AX, 3-gang
- 2 modules.
Depth: 25 mm


20003
20 AX, 3-gang
- 2 modules.
Depth: 25 mm



20002.B
20 AX.
Depth: 25 mm

20002.2.B
20 AX
- 2 modules.
Depth: 25 mm

20003.B
20 AX, 3-gang
- 2 modules.
Depth: 25 mm



20002.N
20 AX.
Depth: 25 mm

20002.2.N
20 AX
- 2 modules.
Depth: 25 mm

20003.N
20 AX, 3-gang
- 2 modules.
Depth: 25 mm

^o Lamps and signalling units, page 75

² Conform to BS 5733

³ Conform to BS 1363-4

Devices

Grey	White	Next
------	-------	------

1P 1-way switches 250 V~, screwless terminals (lightable°)



20001.FX 16 AX.
Depth: 26,7 mm

20001.FX.2 16 AX
- 2 modules.
Depth: 26,7 mm



20001.FX.B 16 AX.
Depth: 26,7 mm

20001.FX.2.B 16 AX
- 2 modules.
Depth: 26,7 mm



20001.FX.N 16 AX.
Depth: 26,7 mm

20001.FX.2.N 16 AX
- 2 modules.
Depth: 26,7 mm

Axial 1P 1-way switches 250 V~ (lightable°)



20101 16 AX.
Depth: 34,5 mm

20101.2 16 AX
- 2 modules.
Depth: 34,5 mm



20101.B 16 AX.
Depth: 34,5 mm

20101.2.B 16 AX
- 2 modules.
Depth: 34,5 mm



20101.N 16 AX.
Depth: 34,5 mm

20101.2.N 16 AX
- 2 modules.
Depth: 34,5 mm

2P 1-way switches 250 V~ (lightable°)



20015 16 AX.
Depth: 25 mm

20015.2 16 AX
- 2 modules.
Depth: 25 mm



20015.B 16 AX.
Depth: 25 mm

20015.2.B 16 AX
- 2 modules.
Depth: 25 mm



20015.N 16 AX.
Depth: 25 mm

20015.2.N 16 AX
- 2 modules.
Depth: 25 mm

2P 1-way switches 250 V~, screwless terminals (lightable°)



20015.FX 16 AX.
Depth: 26,7 mm

20015.FX.2 16 AX
- 2 modules.
Depth: 26,7 mm



20015.FX.B 16 AX.
Depth: 26,7 mm

20015.FX.2.B 16 AX
- 2 modules.
Depth: 26,7 mm



20015.FX.N 16 AX.
Depth: 26,7 mm

20015.FX.2.N 16 AX
- 2 modules.
Depth: 26,7 mm

2P 1-way switches 250 V~ (lightable°)



20016 20 AX.
Depth: 26 mm

20016.2 20 AX, ON/OFF
- 2 modules.
Depth: 26 mm

20016.WH 20 AX,
Water/Heater.
Depth: 26 mm



20016.B 20 AX.
Depth: 26 mm

20016.2.B 20 AX, ON/OFF
- 2 modules.
Depth: 26 mm

20016.WH.B 20 AX,
Water/Heater.
Depth: 26 mm



20016.N 20 AX.
Depth: 26 mm

20016.2.N 20 AX, ON/OFF
- 2 modules.
Depth: 26 mm

20016.WH.N 20 AX,
Water/Heater.
Depth: 26 mm



20016.2.WH 20 AX, Water/Heater
- 2 modules.
Depth: 26 mm



20016.2.WH.B 20 AX, Water/Heater
- 2 modules.
Depth: 26 mm



20016.2.WH.N 20 AX, Water/Heater
- 2 modules.
Depth: 26 mm

Devices

Grey	White	Next
------	-------	------

2P 1-way switches 250 V~ (lightable[®])



20017
32 A, 1-gang, ON/OFF.
Depth: 22,5 mm



20017.WH
32 A, 1-gang, Water/Heater.
Depth: 22,5 mm



20017.B
32 A, 1-gang, ON/OFF.
Depth: 22,5 mm



20017.WH.B
32 A, 1-gang, Water/Heater.
Depth: 22,5 mm



20017.N
32 A, 1-gang, ON/OFF.
Depth: 22,5 mm



20017.WH.N
32 A, 1-gang, Water/Heater.
Depth: 22,5 mm



20018
45 A, 1-gang, ON/OFF.
Depth: 22,5 mm



20018.CK
45 A, 1-gang, cooker unit.
Depth: 22,5 mm



20018.B
45 A, 1-gang, ON/OFF.
Depth: 22,5 mm



20018.CK.B
45 A, 1-gang, cooker unit.
Depth: 22,5 mm



20018.N
45 A, 1-gang, ON/OFF.
Depth: 22,5 mm



20018.CK.N
45 A, 1-gang, cooker unit.
Depth: 22,5 mm



20019
45 A, 1-gang, ON/OFF
for 2-gang boxes.
Depth: 22,5 mm



20019.CK
45 A, 1-gang, cooker
unit for 2-gang boxes.
Depth: 22,5 mm



20019.B
45 A, 1-gang, ON/OFF
for 2-gang boxes.
Depth: 22,5 mm



20019.CK.B
45 A, 1-gang, cooker
unit for 2-gang boxes.
Depth: 22,5 mm



20019.N
45 A, 1-gang, ON/OFF
for 2-gang boxes.
Depth: 22,5 mm



20019.CK.N
45 A, 1-gang, cooker
unit for 2-gang boxes.
Depth: 22,5 mm

Badge switch (lightable[®])



20466
Badge switch.
Depth: 22,1 mm



20466.B
Badge switch.
Depth: 22,1 mm



20466.N
Badge switch.
Depth: 22,1 mm

1P 2-way switches 250 V~ (lightable[®])



20005
16 AX.
Depth: 25 mm



20005.2
16 AX
- 2 modules.
Depth: 25 mm



20005.B
16 AX.
Depth: 25 mm



20005.2.B
16 AX
- 2 modules.
Depth: 25 mm




































20005.N
16 AX.
Depth: 25 mm




































20005.2.N
16 AX
- 2 modules.
Depth: 25 mm

Devices

Grey		White		Next	
1P 2-way switches 250 V~ (lightable°)					
					
20006 20 AX, Depth: 25 mm	20006.2 20 AX, - 2 modules, Depth: 25 mm	20006.B 20 AX, Depth: 25 mm	20006.2.B 20 AX, - 2 modules, Depth: 25 mm	20006.N 20 AX, Depth: 25 mm	20006.2.N 20 AX, - 2 modules, Depth: 25 mm
1P 2-way switches 250 V~, screwless terminals (lightable°)					
					
20005.FX 16 AX, Depth: 26,7 mm	20005.FX.2 16 AX, - 2 modules, Depth: 26,7 mm	20005.FX.B 16 AX, Depth: 26,7 mm	20005.FX.2.B 16 AX, - 2 modules, Depth: 26,7 mm	20005.FX.N 16 AX, Depth: 26,7 mm	20005.FX.2.N 16 AX, - 2 modules, Depth: 26,7 mm
1P 2-way switches 250 V~					
					
20007 20 AX, 3-gang, - 2 modules, Depth: 32,6 mm		20007.B 20 AX, 3-gang, - 2 modules, Depth: 32,6 mm		20007.N 20 AX, 3-gang, - 2 modules, Depth: 32,6 mm	
Axial 1P 2-way switches 250 V~ (lightable°)					
					
20105 16 AX, Depth: 34,5 mm	20105.2 16 AX, - 2 modules, Depth: 34,5 mm	20105.B 16 AX, Depth: 34,5 mm	20105.2.B 16 AX, - 2 modules, Depth: 34,5 mm	20105.N 16 AX, Depth: 34,5 mm	20105.2.N 16 AX, - 2 modules, Depth: 34,5 mm
1P reversing switches 250 V~ (lightable°)					
					
20013 16 AX, Depth: 25 mm	20013.2 16 AX, - 2 modules, Depth: 25 mm	20013.B 16 AX, Depth: 25 mm	20013.2.B 16 AX, - 2 modules, Depth: 25 mm	20013.N 16 AX, Depth: 25 mm	20013.2.N 16 AX, - 2 modules, Depth: 25 mm
1P reversing switches 250 V~, screwless terminals (lightable°)					
					
20013.FX 16 AX, Depth: 27,7 mm	20013.FX.2 16 AX, - 2 modules, Depth: 26,7 mm	20013.FX.B 16 AX, Depth: 27,7 mm	20013.FX.2.B 16 AX, - 2 modules, Depth: 26,7 mm	20013.FX.N 16 AX, Depth: 27,7 mm	20013.FX.2.N 16 AX, - 2 modules, Depth: 26,7 mm

Devices

Grey		White		Next	
Axial 1P reversing switches 250 V~ (lightable^o)					
					
20113 16 AX. Depth: 34,5 mm	20113.2 16 AX - 2 modules. Depth: 34,5 mm	20113.B 16 AX. Depth: 34,5 mm	20113.2.B 16 AX - 2 modules. Depth: 34,5 mm	20113.N 16 AX. Depth: 34,5 mm	20113.2.N 16 AX - 2 modules. Depth: 34,5 mm
1P NO 10 A push buttons 250 V~ (lightable^o)					
					
20008 10 A. Depth: 25 mm	20008.2 10 A - 2 modules. Depth: 25 mm	20008.B 10 A. Depth: 25 mm	20008.2.B 10 A - 2 modules. Depth: 25 mm	20008.N 10 A. Depth: 25 mm	20008.2.N 10 A - 2 modules. Depth: 25 mm
					
20008.2.C Bell symbol - 2 modules. Depth: 25 mm	20008.2.L Light symbol - 2 modules. Depth: 25 mm	20008.2.C.B Bell symbol - 2 modules. Depth: 25 mm	20008.2.L.B Light symbol - 2 modules. Depth: 25 mm	20008.2.C.N Bell symbol - 2 modules. Depth: 25 mm	20008.2.L.N Light symbol - 2 modules. Depth: 25 mm
1P NO 10 A push buttons 250 V~, screwless terminals (lightable^o)					
					
20008.FX 10 A. Depth: 26,7 mm	20008.FX.2 10 A - 2 modules. Depth: 26,7 mm	20008.FX.B 10 A. Depth: 26,7 mm	20008.FX.2.B 10 A - 2 modules. Depth: 26,7 mm	20008.FX.N 10 A. Depth: 26,7 mm	20008.FX.2.N 10 A - 2 modules. Depth: 26,7 mm
Axial 1P NO 10 A push buttons 250 V~ (lightable^o)					
					
20108 10 A. Depth: 34,5 mm	20108.2 10 A - 2 modules. Depth: 34,5 mm	20108.B 10 A. Depth: 34,5 mm	20108.2.B 10 A - 2 modules. Depth: 34,5 mm	20108.N 10 A. Depth: 34,5 mm	20108.2.N 10 A - 2 modules. Depth: 34,5 mm
1P NC 10 A push button 250 V~ (lightable^o)					
					
20010 10 A. Depth: 25 mm	20010.B 10 A. Depth: 25 mm	20010.N 10 A. Depth: 25 mm			

Devices

Grey	White	Next
------	-------	------

Lightable° mechanisms 250 V~ (common devices for the three versions)

								
20001.0 1P 16 AX 1-way switch. Depth: 25 mm	20015.0 2P 16 AX 1-way switch. Depth: 25 mm	20005.0 1P 16 AX 2-way switch. Depth: 25 mm	20013.0 1P 16 AX reversing switch. Depth: 25 mm	20008.0 1P NO 10 A push button. Depth: 25 mm	20010.0 1P NC 10 A push button. Depth: 25 mm	20002.0 1P 20 AX 1-way switch. Depth: 25 mm	20016.0 2P 20 AX 1-way switch. Depth: 25 mm	20006.0 1P 20 AX 2-way switch. Depth: 25 mm

Lightable° mechanisms 250 V~, screwless terminals (common devices for the three versions)

				
20001.FX.0 1P 16 AX 1-way switch. Depth: 26,7 mm	20015.FX.0 2P 16 AX 1-way switch. Depth: 26,7 mm	20005.FX.0 1P 16 AX 2-way switch. Depth: 26,7 mm	20013.FX.0 1P 16 AX reversing switch. Depth: 26,7 mm	20008.FX.0 1P NO 10 A push button. Depth: 26,7 mm

1-module interchangeable buttons (lightable°)

											
20021 No symbol	20026 With diffuser	20026.DND Do Not Disturb with diffuser	20026.PLS Please Clean with diffuser	20021.B No symbol	20026.B With diffuser	20026.DND.B Do Not Disturb with diffuser	20026.PLS.B Please Clean with diffuser	20021.N No symbol	20026.N With diffuser	20026.DND.N Do Not Disturb with diffuser	20026.PLS.N Please Clean with diffuser
											
20031 Customizable	20021.C Bell symbol	20021.L Light symbol	20021.P Key symbol	20031.B Customizable	20021.C.B Bell symbol	20021.L.B Light symbol	20021.P.B Key symbol	20031.N Customizable	20021.C.N Bell symbol	20021.L.N Light symbol	20021.P.N Key symbol
											
20021.99 O symbols for 2P switches	20031.PS 'Press' marked			20021.99.B O symbols for 2P switches	20031.PS.B 'Press' marked			20021.99.N O symbols for 2P switches	20031.PS.N 'Press' marked		

1-module interchangeable buttons for axial controls (lightable°)

									
20131 No symbol	20131.C Bell symbol	20131.L Light symbol	20131.B No symbol	20131.C.B Bell symbol	20131.L.B Light symbol	20131.N No symbol	20131.C.N Bell symbol	20131.L.N Light symbol	
									
20131.P Key symbol	20131.0 Customizable			20131.P.B Key symbol	20131.0.B Customizable			20131.P.N Key symbol	20131.0.N Customizable

Devices

Grey	White	Next
------	-------	------












2-module interchangeable buttons (lightable[°])

 20022 No symbol	 20027 With diffuser	 20032 Customizable	 20022.B No symbol	 20027.B With diffuser	 20032.B Customizable	 20022.N No symbol	 20027.N With diffuser	 20032.N Customizable
 20022.C Bell symbol	 20022.L Light symbol	 20022.P Key symbol	 20022.C.B Bell symbol	 20022.L.B Light symbol	 20022.P.B Key symbol	 20022.C.N Bell symbol	 20022.L.N Light symbol	 20022.P.N Key symbol
 20022.99 O I symbols for 2P switches	 20032.PS 'Press' marked		 20022.99.B O I symbols for 2P switches	 20032.PS.B 'Press' marked		 20022.99.N O I symbols for 2P switches	 20032.PS.N 'Press' marked	

2-module interchangeable buttons for axial controls (lightable[°])

 20132 No symbol	 20132.C Bell symbol	 20132.L Light symbol	 20132.B No symbol	 20132.C.B Bell symbol	 20132.L.B Light symbol	 20132.N No symbol	 20132.C.N Bell symbol	 20132.L.N Light symbol
 20132.P Key symbol	 20132.O Customizable		 20132.P.B Key symbol	 20132.O.B Customizable		 20132.P.N Key symbol	 20132.O.N Customizable	

3-module interchangeable buttons (lightable[°])

 20023 No symbol	 20028 With diffuser	 20023.B No symbol	 20028.B With diffuser	 20023.N No symbol	 20028.N With diffuser
 20033 Customizable	 20023.C Bell symbol	 20033.B Customizable	 20023.C.B Bell symbol	 20033.N Customizable	 20023.C.N Bell symbol

Devices

Grey	White	Next
------	-------	------

1P special switches 250 V~


 20050 NO 10 A, with lightable name-plate - 2 modules. Depth: 26,5 mm	 20052 NO 10 A cord-operated. Depth: 25,5 mm	 20053 NC 10 A cord-operated. Depth: 25,5 mm	 20050.B NO 10 A, with lightable name-plate - 2 modules. Depth: 26,5 mm	 20052.B NO 10 A cord-operated. Depth: 25,5 mm	 20053.B NC 10 A cord-operated. Depth: 25,5 mm	 20050.N NO 10 A, with lightable name-plate - 2 modules. Depth: 26,5 mm	 20052.N NO 10 A cord-operated. Depth: 25,5 mm	 20053.N NC 10 A cord-operated. Depth: 25,5 mm
--	---	---	--	---	---	--	---	---

 20097 NO 10 A 230 V~, for hotel "Do Not Disturb" and "Please Clean" lightable - 2 modules. Depth: 29 mm

Additional 1P switches 250 V~

 20056.33 10 A, NO + NC-contact, OFF symbol. Depth: 29,5 mm	 20056.34 10 A, NO + NC-contact, ON symbol. Depth: 29,5 mm	 20058 Two 10 A NO+NC independent contacts, OFF/ON symbols. Depth: 29,5 mm	 20056.33.B 10 A, NO + NC-contact, OFF symbol. Depth: 29,5 mm	 20056.34.B 10 A, NO + NC-contact, ON symbol. Depth: 29,5 mm	 20058.B Two 10 A NO+NC independent contacts, OFF/ON symbols. Depth: 29,5 mm	 20056.33.N 10 A, NO + NC-contact, OFF symbol. Depth: 29,5 mm	 20056.34.N 10 A, NO + NC-contact, ON symbol. Depth: 29,5 mm	 20058.N Two 10 A NO+NC independent contacts, OFF/ON symbols. Depth: 29,5 mm
--	---	---	--	---	---	--	---	---


1P push buttons 250 V~

 20066 Two NO 10 A, independents. Depth: 29,5 mm	 20066.B Two NO 10 A, independents. Depth: 29,5 mm	 20066.N Two NO 10 A, independents. Depth: 29,5 mm
---	---	---

1P NO 10 A push buttons 250 V~ with indicator (for signalling units*)

 20068.B White diffuser. Depth: 29 mm	 ▲ 20068.V Green diffuser. Depth: 29 mm	 20068.B.B White diffuser. Depth: 29 mm	 ▲ 20068.R.B Red diffuser. Depth: 29 mm	 ▲ 20068.V.B Green diffuser. Depth: 29 mm	 20068.B.N White diffuser. Depth: 29 mm
--	--	--	--	--	--

Switches 250 V~

 20060 2P 10 AX 2-way switch, OFF-central. Depth: 34 mm	 20062 2 1P NO 10 A push buttons, interlocked. Depth: 29,5 mm	 20060.B 2P 10 AX 2-way switch, OFF-central. Depth: 34 mm	 20062.B 2 1P NO 10 A push buttons, interlocked. Depth: 29,5 mm	 20060.N 2P 10 AX 2-way switch, OFF-central. Depth: 34 mm	 20062.N 2 1P NO 10 A push buttons, interlocked. Depth: 29,5 mm
--	--	--	--	--	--

Devices

Grey	White	Next
------	-------	------

2P key-operated switches 250 V~ (add .CU to the basic code for switches with 000 unified key)



20082
16 AX 1-way switch,
key removable in
"O" (OFF) position.
Depth: 33,5 mm

20083
16 AX 1-way switch,
key removable in
both positions.
Depth: 33,5 mm



20082.B
16 AX 1-way switch,
key removable in
"O" (OFF) position.
Depth: 33,5 mm

20083.B
16 AX 1-way switch,
key removable in
both positions.
Depth: 33,5 mm



20082.N
16 AX 1-way switch,
key removable in
"O" (OFF) position.
Depth: 33,5 mm

20083.N
16 AX 1-way switch,
key removable in
both positions.
Depth: 33,5 mm



20086
NO 16 A push button,
key removable in "O"
position.
Depth: 33,5 mm



20086.B
NO 16 A push button,
key removable in "O"
position.
Depth: 33,5 mm



20086.N
NO 16 A push button,
key removable in "O"
position.
Depth: 33,5 mm

Dimmers**



▲ 20135.1
MASTER,
universal
▲ 20135
As above
20135.120
As above,
120 V~.
Depth: 41,5 mm

▲ 20136.1
MASTER,
universal, with
potentiometer
▲ 20136
As above
20136.120
As above,
120 V~.
Depth: 41,5 mm

20137
SLAVE,
universal
20137.120
As above,
120 V~.
Depth: 41,5 mm



▲ 20135.1.B
MASTER,
universal
▲ 20135.B
As above
20135.120.B
As above,
120 V~.
Depth: 41,5 mm

▲ 20136.1.B
MASTER,
universal, with
potentiometer
▲ 20136.B
As above
20136.120.B
As above,
120 V~.
Depth: 41,5 mm

20137.B
SLAVE,
universal
20137.120.B
As above,
120 V~.
Depth: 41,5 mm



▲ 20135.1.N
MASTER,
universal
▲ 20135.N
As above
20135.120.N
As above,
120 V~.
Depth: 41,5 mm

▲ 20136.1.N
MASTER,
universal, with
potentiometer
▲ 20136.N
As above
20136.120.N
As above,
120 V~.
Depth: 41,5 mm

20137.N
SLAVE,
universal
20137.120.N
As above,
120 V~.
Depth: 41,5 mm



20138
RGB, with
potentiometer
20138.120
As above,
120 V~.
Depth: 41,5 mm

20139
FADING-SHOW,
with potentiometer
20139.120
As above,
120 V~.
Depth: 41,5 mm



20138.B
RGB, with
potentiometer
20138.120.B
As above,
120 V~.
Depth: 41,5 mm

20139.B
FADING-SHOW,
with potentiometer
20139.120.B
As above,
120 V~.
Depth: 41,5 mm



20138.N
RGB, with
potentiometer
20138.120.N
As above,
120 V~.
Depth: 41,5 mm

20139.N
FADING-SHOW,
with potentiometer
20139.120.N
As above,
120 V~.
Depth: 41,5 mm



***20148**
MASTER,
800 W/500 VA
120-230 V~.
Depth: 41,5 mm

***20149**
SLAVE,
800 W/500 VA
120-230 V~.
Depth: 41,5 mm



***20148.B**
MASTER,
800 W/500 VA
120-230 V~.
Depth: 41,5 mm

***20149.B**
SLAVE,
800 W/500 VA
120-230 V~.
Depth: 41,5 mm



***20148.N**
MASTER,
800 W/500 VA
120-230 V~.
Depth: 41,5 mm

***20149.N**
SLAVE,
800 W/500 VA
120-230 V~.
Depth: 41,5 mm

Devices

Grey	White	Next
------	-------	------

Dimmers (fuse protected for British Standard boxes with depth equal or higher than 35 mm)**



Δ*20140
MASTER, 700 W
230 V~ - 2 modules.
For incandescent lamps
and ferromagnetic
transformers

Δ*20142
As above, 500 VA
- 2 modules
Only for electronic
transformers



Depth: 32,5 mm



Δ*20141
SLAVE, 700 W
230 V~ - 2 modules.
For incandescent lamps
and ferromagnetic
transformers

Δ*20143
As above, 500 VA
- 2 modules
Only for electronic
transformers



Depth: 32,5 mm



Δ*20140.B
MASTER, 700 W
230 V~ - 2 modules.
For incandescent lamps
and ferromagnetic
transformers

Δ*20142.B
As above, 500 VA
- 2 modules
Only for electronic
transformers



Depth: 32,5 mm



Δ*20141.B
SLAVE, 700 W
230 V~ - 2 modules.
For incandescent lamps
and ferromagnetic
transformers

Δ*20143.B
As above, 500 VA
- 2 modules
Only for electronic
transformers



Depth: 32,5 mm



Δ*20140.N
MASTER, 700 W
230 V~ - 2 modules.
For incandescent lamps
and ferromagnetic
transformers

Δ*20142.N
As above, 500 VA
- 2 modules
Only for electronic
transformers



Depth: 32,5 mm



Δ*20141.N
SLAVE, 700 W
230 V~ - 2 modules.
For incandescent lamps
and ferromagnetic
transformers

Δ*20143.N
As above, 500 VA
- 2 modules
Only for electronic
transformers



Depth: 32,5 mm



20165
MASTER, 500 W
230 V~ - 2 modules.
For incandescent lamps
and ferromagnetic
transformers

20167
As above, 400 VA
- 2 modules.
Only for electronic
transformers



Depth: 32,5 mm



Δ 20166
SLAVE, 500 W
230 V~ - 2 modules.
For incandescent lamps
and ferromagnetic
transformers

Δ 20168
As above, 400 VA
- 2 modules.
Only for electronic
transformers



Depth: 32,5 mm



20165.B
MASTER, 500 W
230 V~ - 2 modules.
For incandescent lamps
and ferromagnetic
transformers

20167.B
As above, 400 VA
- 2 modules.
Only for electronic
transformers



Depth: 32,5 mm



Δ 20166.B
SLAVE, 500 W
230 V~ - 2 modules.
For incandescent lamps
and ferromagnetic
transformers

Δ 20168.B
As above, 400 VA
- 2 modules.
Only for electronic
transformers



Depth: 32,5 mm



20165.N
MASTER, 500 W
230 V~ - 2 modules.
For incandescent lamps
and ferromagnetic
transformers

20167.N
As above, 400 VA
- 2 modules.
Only for electronic
transformers



Depth: 32,5 mm



Δ 20166.N
SLAVE, 500 W
230 V~ - 2 modules.
For incandescent lamps
and ferromagnetic
transformers

Δ 20168.N
As above, 400 VA
- 2 modules.
Only for electronic
transformers



Depth: 32,5 mm

Electronic transformers (230-240 V~ 50/60 Hz)



Δ 01860.60
20-60 W,
12 V~ (SELV) output



01860.105
20-105 W,
12 V~ (SELV) output

Bleeder



01873
230 V~ 50 Hz, flush
mounting (rear side)

01873.120
As above, 120 V~

Electronic supply unit



01874
230 V~ 50 Hz, for controllable
LED lamps, 12-24 Vdc

01874.120 As above, 120 V~



01875
230 V~ 50 Hz, for controllable
LED lamps, 350/500/700 mA

01875.120 As above, 120 V~



01876
230 V~ 50 Hz, for controllable
LED RGB lamps, 12-24 Vdc

01876.120 As above, 120 V~

Devices

Grey	White	Next
------	-------	------

Touch switches (230 V~ with built-in touch sensor)



20120
Electronic switch, NO 6 A relay.
Depth: 37 mm



20125
Dimmer, 40-500 W/WA, MASTER.
Depth: 41,5 mm



20123
Push button for remote control, 50/60 Hz.
Depth: 37 mm



20120.B
Electronic switch, NO 6 A relay.
Depth: 37 mm



20125.B
Dimmer, 40-500 W/WA, MASTER.
Depth: 41,5 mm



20123.B
Push button for remote control, 50/60 Hz.
Depth: 37 mm



20120.N
Electronic switch, NO 6 A relay.
Depth: 37 mm



20125.N
Dimmer, 40-500 W/WA, MASTER.
Depth: 41,5 mm



20123.N
Push button for remote control, 50/60 Hz.
Depth: 37 mm

Infrared switches



20172
Receiver, NO 6 A 230 V~ relay output, 50/60 Hz.
20172.120
As above, 120 V~.
Depth: 37 mm



20173
Receiver, 4 A 230 V~ relay outputs, for rolling shutters - 2 modules.
Depth: 37 mm



20175
Receiver, 40-450 W/WA dimmer, 230 V~.
Depth: 41,5 mm



20172.B
Receiver, NO 6 A 230 V~ relay output, 50/60 Hz.
20172.120.B
As above, 120 V~.
Depth: 37 mm



20173.B
Receiver, 4 A 230 V~ relay outputs, for rolling shutters - 2 modules.
Depth: 37 mm



20175.B
Receiver, 40-450 W/WA dimmer, 230 V~.
Depth: 41,5 mm



20172.N
Receiver, NO 6 A 230 V~ relay output, 50/60 Hz.
20172.120.N
As above, 120 V~.
Depth: 37 mm



20173.N
Receiver, 4 A 230 V~ relay outputs, for rolling shutters - 2 modules.
Depth: 37 mm



20175.N
Receiver, 40-450 W/WA dimmer, 230 V~.
Depth: 41,5 mm



01849
IR remote control, 14-channel



20181
Lighting switch, NO 6 A 230 V~ relay output, 50/60 Hz.
20181.120
As above, 120 V~.
Depth: 37 mm




20184
For incandescent lamps, 60-300 W, 230 V~ 50/60 Hz.
Depth: 37 mm




20181.B
Lighting switch, NO 6 A 230 V~ relay output, 50/60 Hz.
20181.120.B
As above, 120 V~.
Depth: 37 mm




20184.B
For incandescent lamps, 60-300 W, 230 V~ 50/60 Hz.
Depth: 37 mm




20181.N
Lighting switch, NO 6 A 230 V~ relay output, 50/60 Hz.
20181.120.N
As above, 120 V~.
Depth: 37 mm




20184.N
For incandescent lamps, 60-300 W, 230 V~ 50/60 Hz.
Depth: 37 mm



00800.14
Frame for orientable support surface mounting



00805.14
Adaptor for orientable support flush mounting - 2 modules.
Depth: 36,5 mm



00801.14
Orientable support - 1 module




00800
Frame for orientable support surface mounting



00805
Adaptor for orientable support flush mounting - 2 modules.
Depth: 36,5 mm




00801
Orientable support - 1 module



00800.20
Frame for orientable support surface mounting



00805.20
Adaptor for orientable support flush mounting - 2 modules.
Depth: 36,5 mm



00801.20
Orientable support - 1 module

Devices • Socket outlets

Grey	White	Next
------	-------	------

Set/Reset push buttons



20183
For emergency call, 2 NO 5 A 250 V~, 12 V~/12-24 Vdc (SELV) - 2 modules.
Depth: 38,5 mm



20183.B
For emergency call, 2 NO 5 A 250 V~, 12 V~/12-24 Vdc (SELV) - 2 modules.
Depth: 38,5 mm



20183.N
For emergency call, 2 NO 5 A 250 V~, 12 V~/12-24 Vdc (SELV) - 2 modules.
Depth: 38,5 mm

SICURY 2P+E Italian standard socket outlets 250 V~



20201
10 A, P11.
Depth: 25 mm



20203
Bpresa 16 A, P17/11.
Depth: 25 mm



20201.B
10 A, P11.
Depth: 25 mm



20203.B
Bpresa 16 A, P17/11.
Depth: 25 mm



20201.N
10 A, P11.
Depth: 25 mm



20203.N
Bpresa 16 A, P17/11.
Depth: 25 mm



20209
16 A, P30
- 2 modules.
Depth: 29,4 mm



20210
16 A, universal
- 2 modules.
Depth: 26 mm




20209.B
16 A, P30
- 2 modules.
Depth: 29,4 mm



20210.B
16 A, universal
- 2 modules.
Depth: 26 mm



20209.N
16 A, P30
- 2 modules.
Depth: 29,4 mm



20210.N
16 A, universal
- 2 modules.
Depth: 26 mm

SICURY 2P+E socket outlets 250 V~ (for dedicated supply lines)



20203.R
Bpresa 16 A, P17/11, red.
Depth: 25 mm



20209.A
16 A, P30, orange
- 2 modules.
Depth: 29,4 mm



20209.R
16 A, P30, red
- 2 modules.
Depth: 29,4 mm



20209.V
16 A, P30, green
- 2 modules.
Depth: 29,4 mm



20210.R
16 A, universal, red
- 2 modules.
Depth: 29,4 mm

SICURY 2P+E interlocked socket outlets with CB and RCBO $I_{\Delta n}$ 10 mA, (120-230 V~ 50/60 Hz)



20273
Bpresa 16 A P17/11 250 V~, 1P+N C 16 - 2 modules.
Depth: 39,7 mm



20273.B
Bpresa 16 A P17/11 250 V~, 1P+N C 16 - 2 modules.
Depth: 39,7 mm



20273.N
Bpresa 16 A P17/11 250 V~, 1P+N C 16 - 2 modules.
Depth: 39,7 mm



20276
16 A P30 250 V~, 1P+N C 16 - 3 modules.
Depth: 39,8 mm



20283
Bpresa 16 A P17/11 250 V~, 1P+N C 16 - 3 modules.
Depth: 39,7 mm



20276.B
16 A P30 250 V~, 1P+N C 16 - 3 modules.
Depth: 39,8 mm



20283.B
Bpresa 16 A P17/11 250 V~, 1P+N C 16 - 3 modules.
Depth: 39,7 mm



20276.N
16 A P30 250 V~, 1P+N C 16 - 3 modules.
Depth: 39,8 mm



20283.N
Bpresa 16 A P17/11 250 V~, 1P+N C 16 - 3 modules.
Depth: 39,7 mm

Socket outlets

Grey	White	Next
------	-------	------

SICURY 2P+E interlocked socket outlets with CB and RCBO $I_{\Delta n}$ 10 mA, (120-230 V~ 50/60 Hz)



20286
16 A P30 250 V~, 1P+N C 16
- 4 modules. Depth: 39,8 mm



20286.B
16 A P30 250 V~, 1P+N C 16
- 4 modules. Depth: 39,8 mm



20286.N
16 A P30 250 V~, 1P+N C 16
- 4 modules. Depth: 39,8 mm

Shaver supply units



20290
230 V~ 50/60 Hz, with 20 VA isolating
transformer, 230 V~ and 120 V~ outputs
- 3 modules. Depth: 42 mm



20290.B
230 V~ 50/60 Hz, with 20 VA isolating
transformer, 230 V~ and 120 V~ outputs
- 3 modules. Depth: 42 mm



20290.N
230 V~ 50/60 Hz, with 20 VA isolating
transformer, 230 V~ and 120 V~ outputs
- 3 modules. Depth: 42 mm



20291⁶
230 V~ 50/60 Hz,
with 20 VA isolating
transformer, 230 V~
and 120 V~ outputs.
Depth: 41 mm



20291.B⁶
230 V~ 50/60 Hz,
with 20 VA isolating
transformer, 230 V~
and 120 V~ outputs.
Depth: 41 mm



20291.N⁶
230 V~ 50/60 Hz,
with 20 VA isolating
transformer, 230 V~
and 120 V~ outputs.
Depth: 41 mm

Socket outlets 250 V~ - German standard



20208
SICURY 2P+E
16 A, German
- 2 modules.
Depth: 29,4 mm



20208.C
SICURY 2P+E 16 A,
German, with cover
- 2 modules.
Depth: 31,2 mm



20208.B
SICURY 2P+E
16 A, German
- 2 modules.
Depth: 29,4 mm



20208.C.B
SICURY 2P+E 16 A,
German, with cover
- 2 modules.
Depth: 31,2 mm



20208.N
SICURY 2P+E
16 A, German
- 2 modules.
Depth: 29,4 mm



20208.C.N
SICURY 2P+E 16 A,
German, with cover
- 2 modules.
Depth: 31,2 mm

Socket outlets 250 V~, screwless terminals - German standard



20208.FX
SICURY 2P+E
16 A, German
- 2 modules.
Depth: 33,5 mm



20208.FX.C
SICURY 2P+E 16 A,
German, with cover
- 2 modules.
Depth: 34,4 mm



20208.FX.B
SICURY 2P+E
16 A, German
- 2 modules.
Depth: 33,5 mm



20208.FX.C.B
SICURY 2P+E 16 A,
German, with cover
- 2 modules.
Depth: 34,4 mm



20208.FX.N
SICURY 2P+E
16 A, German
- 2 modules.
Depth: 33,5 mm

































20208.FX.C.N
SICURY 2P+E 16 A,
German, with cover
- 2 modules.
Depth: 34,4 mm










⁹ Lamps and signalling units, page 75

⁶ Conform to BS 61558-2-5

Socket outlets

Grey			White			Next		
Socket outlets 250 V~ - French standard								
		20212 SICURY 2P+E 16 A, French - 2 modules. Depth: 26,4 mm			20212.B SICURY 2P+E 16 A, French - 2 modules. Depth: 26,4 mm			20212.N SICURY 2P+E 16 A, French - 2 modules. Depth: 26,4 mm
		20212.C SICURY 2P+E 16 A, French, with cover - 2 modules. Depth: 28,3 mm			20212.C.B SICURY 2P+E 16 A, French, with cover - 2 modules. Depth: 28,3 mm			20212.C.N SICURY 2P+E 16 A, French, with cover - 2 modules. Depth: 28,3 mm
Socket outlets 250 V~, screwless terminals - French standard								
		20212.FX SICURY 2P+E 16 A, French - 2 modules. Depth: 30,5 mm			20212.FX.B SICURY 2P+E 16 A, French - 2 modules. Depth: 30,5 mm			20212.FX.N SICURY 2P+E 16 A, French - 2 modules. Depth: 30,5 mm
		20212.FX.C SICURY 2P+E 16 A, French, with cover - 2 modules. Depth: 31,5 mm			20212.FX.C.B SICURY 2P+E 16 A, French, with cover - 2 modules. Depth: 31,5 mm			20212.FX.C.N SICURY 2P+E 16 A, French, with cover - 2 modules. Depth: 31,5 mm
Socket outlets 250 V~ - English standard								
								
20214 SICURY 2P+E 5 A, English - 2 modules. Depth: 17,8 mm	20219 2P+E 13 A, English - 2 modules. Depth: 17 mm	20220 SICURY 2P+E 13 A, English - 2 modules. Depth: 24,4 mm	20214.B SICURY 2P+E 5 A, English - 2 modules. Depth: 17,8 mm	20219.B 2P+E 13 A, English - 2 modules. Depth: 17 mm	20220.B SICURY 2P+E 13 A, English - 2 modules. Depth: 24,4 mm	20214.N SICURY 2P+E 5 A, English - 2 modules. Depth: 17,8 mm	20219.N 2P+E 13 A, English - 2 modules. Depth: 17 mm	20220.N SICURY 2P+E 13 A, English - 2 modules. Depth: 24,4 mm
Socket outlets 250 V~ - Swiss standard								
								
20226 2P+E 10 A, Swiss, 13-type - 2 modules. Depth: 36,75 mm	20226.B 2P+E 10 A, Swiss, 13-type - 2 modules. Depth: 36,75 mm	20226.N 2P+E 10 A, Swiss, 13-type - 2 modules. Depth: 36,75 mm						
Socket outlets 250 V~ - Euro-American standard								
								
20234 SICURY 2P 16 A, Euro-American (ø 4,8 mm). Depth: 28,5 mm	20248 SICURY 2P+E 16 A, Euro-American - 2 modules. Depth: 26,5 mm	20234.B SICURY 2P 16 A, Euro-American (ø 4,8 mm). Depth: 28,5 mm	20248.B SICURY 2P+E 16 A, Euro-American - 2 modules. Depth: 26,5 mm	20234.N SICURY 2P 16 A, Euro-American (ø 4,8 mm). Depth: 28,5 mm	20248.N SICURY 2P+E 16 A, Euro-American - 2 modules. Depth: 26,5 mm			

Socket outlets

Grey			White			Next																				
Socket outlets 250 V~ - Euro-American standard																										
 20249 Two SICURY 2P+E 16 A, Euro-American - 3 modules. Depth: 24,5 mm			 20249.B Two SICURY 2P+E 16 A, Euro-American - 3 modules. Depth: 24,5 mm			 20249.N Two SICURY 2P+E 16 A, Euro-American - 3 modules. Depth: 24,5 mm																				
Socket outlets 127 V~ - USA and Saudi Arabian standards																										
 20242 SICURY 2P+E 15 A, USA and Arabian. Depth: 27,4 mm			 20243 Two SICURY 2P+E 15 A, USA and Arabian - 3 modules. Depth: 26 mm			 20242.B SICURY 2P+E 15 A, USA and Arabian. Depth: 27,4 mm			 20243.B Two SICURY 2P+E 15 A, USA and Arabian - 3 modules. Depth: 26 mm			 20242.N SICURY 2P+E 15 A, USA and Arabian. Depth: 27,4 mm			 20243.N Two SICURY 2P+E 15 A, USA and Arabian - 3 modules. Depth: 26 mm											
Socket outlets 250 V~ - Israeli standard																										
 20240 SICURY 2P+E 16 A, Israeli - 2 modules. Depth: 28,7 mm			 20240.B SICURY 2P+E 16 A, Israeli - 2 modules. Depth: 28,7 mm			 20240.N SICURY 2P+E 16 A, Israeli - 2 modules. Depth: 28,7 mm																				
Socket outlets 250 V~ - Argentinian standard																										
 20250 SICURY 2P+E 10 A, Argentinian. Depth: 27,5 mm			 20250.B SICURY 2P+E 10 A, Argentinian. Depth: 27,5 mm			 20250.N SICURY 2P+E 10 A, Argentinian. Depth: 27,5 mm																				
Socket outlets 250 V~ - Chinese standard																										
 20251 SICURY 2P+E 10 A, Chinese. Depth: 27,5 mm			 20252 SICURY 2P+E 10 A, Chinese. - 2 modules. Depth: 27,3 mm			 20254 SICURY 2P+E 16 A, Chinese. - 2 modules. Depth: 30 mm			 20251.B SICURY 2P+E 10 A, Chinese. Depth: 27,5 mm			 20252.B SICURY 2P+E 10 A, Chinese. - 2 modules. Depth: 27,3 mm			 20254.B SICURY 2P+E 16 A, Chinese. - 2 modules. Depth: 30 mm			 20251.N SICURY 2P+E 10 A, Chinese. Depth: 27,5 mm			 20252.N SICURY 2P+E 10 A, Chinese. - 2 modules. Depth: 27,3 mm			 20254.N SICURY 2P+E 16 A, Chinese. - 2 modules. Depth: 30 mm		

Socket outlets

Grey	White	Next
------	-------	------

Socket outlets 250 V~ - Brazilian standard

  20264 SICURY 2P+E 10 A, Brazilian. Depth: 31,5 mm	 20265 SICURY 2P+E 20 A, Brazilian. Depth: 31,5 mm	  20264.B SICURY 2P+E 10 A, Brazilian. Depth: 31,5 mm	 20265.B SICURY 2P+E 20 A, Brazilian. Depth: 31,5 mm	  20264.N SICURY 2P+E 10 A, Brazilian. Depth: 31,5 mm	 20265.N SICURY 2P+E 20 A, Brazilian. Depth: 31,5 mm
---	---	---	---	---	---

Socket outlets 250 V~ - Multistandard

 20257 SICURY 2P+E 13 A, multistandard - 2 modules. Depth: 18,7 mm	 20257.B SICURY 2P+E 13 A, multistandard - 2 modules. Depth: 18,7 mm	 20257.N SICURY 2P+E 13 A, multistandard - 2 modules. Depth: 18,7 mm
---	---	---

Socket outlets 125 V~ - 2P+E 15 A 60 Hz American standard

 21296 Double American standard with GFCI - 3 modules. Depth: 33,4 mm	 21296.B Double American standard with GFCI - 3 modules. Depth: 33,4 mm	 21296.N Double American standard with GFCI - 3 modules. Depth: 33,4 mm
---	---	---

British standard socket outlets 250 V~ (with signalling unit 00930 included)

 20221.L⁴ SICURY 2P+E 13 A, 1-gang, switched. Depth: 17,5 mm	 20222.L⁴ SICURY 2P+E 13 A, 2-gang, switched. Depth: 17,5 mm	 20221.L.B⁴ SICURY 2P+E 13 A, 1-gang, switched. Depth: 17,5 mm	 20222.L.B⁴ SICURY 2P+E 13 A, 2-gang, switched. Depth: 17,5 mm	 20221.L.N⁴ SICURY 2P+E 13 A, 1-gang, switched. Depth: 17,5 mm	 20222.L.N⁴ SICURY 2P+E 13 A, 2-gang, switched. Depth: 17,5 mm
 20215.L⁵ SICURY 2P+E 5 A, 1-gang, switched. Depth: 17,5 mm	 20217.L⁵ SICURY 2P+E 15 A, 1-gang, switched. Depth: 25,5 mm	 20215.L.B⁵ SICURY 2P+E 5 A, 1-gang, switched. Depth: 17,5 mm	 20217.L.B⁵ SICURY 2P+E 15 A, 1-gang, switched. Depth: 25,5 mm	 20215.L.N⁵ SICURY 2P+E 5 A, 1-gang, switched. Depth: 17,5 mm	 20217.L.N⁵ SICURY 2P+E 15 A, 1-gang, switched. Depth: 25,5 mm

Socket outlets • Signal reception socket outlets

Grey	White	Next
------	-------	------

USB supply unit



20292
5 V 1,5 A supply unit, 1 USB, 120-230 V~ 50/60 Hz.
Depth: 37 mm



20295
5 V 2,1 A supply unit, 2 USB ports supply a total of 2,1 A, 120-230 V~ 50/60 Hz - 2 modules.
Depth: 37 mm



20292.B
5 V 1,5 A supply unit, 1 USB, 120-230 V~ 50/60 Hz.
Depth: 37 mm



20295.B
5 V 2,1 A supply unit, 2 USB ports supply a total of 2,1 A, 120-230 V~ 50/60 Hz - 2 modules.
Depth: 37 mm



20292.N
5 V 1,5 A supply unit, 1 USB, 120-230 V~ 50/60 Hz.
Depth: 37 mm



20295.N
5 V 2,1 A supply unit, 2 USB ports supply a total of 2,1 A, 120-230 V~ 50/60 Hz - 2 modules.
Depth: 37 mm

Special socket outlets



20331
2P 6 A 24 V (SELV), for plug 01616/01617.
Depth: 25 mm



20333
5P DIN 41524 socket connector.
Depth: 11 mm



20334
2P point-line 60130-9 IEC-07 socket connector.
Depth: 11 mm



20331.B
2P 6 A 24 V (SELV), for plug 01616/01617.
Depth: 25 mm



20333.B
5P DIN 41524 socket connector.
Depth: 11 mm



20334.B
2P point-line 60130-9 IEC-07 socket connector.
Depth: 11 mm



20331.N
2P 6 A 24 V (SELV), for plug 01616/01617.
Depth: 25 mm



20333.N
5P DIN 41524 socket connector.
Depth: 11 mm



20334.N
2P point-line 60130-9 IEC-07 socket connector.
Depth: 11 mm



20345
USB outlet, screw terminals.
Depth: 31,9 mm



20335
3 RCA outlets, screw terminals.
Depth: 23,4 mm



20345.B
USB outlet, screw terminals.
Depth: 31,9 mm



20335.B
3 RCA outlets, screw terminals.
Depth: 23,4 mm



20345.N
USB outlet, screw terminals.
Depth: 31,9 mm



20335.N
3 RCA outlets, screw terminals.
Depth: 23,4 mm



20583
Spring connector for speaker.
Depth: 19,4 mm



20346
HDMI outlet, Keystone connection.
Depth: 37,4 mm



▲ **20346.H**
HDMI outlet, Keystone connection, with 90° cable.
Depth: 30,5 mm



20583.B
Spring connector for speaker.
Depth: 19,4 mm



20346.B
HDMI outlet, Keystone connection.
Depth: 37,4 mm



▲ **20346.H.B**
HDMI outlet, Keystone connection, with 90° cable.
Depth: 30,5 mm



20583.N
Spring connector for speaker.
Depth: 19,4 mm



20346.N
HDMI outlet, Keystone connection.
Depth: 37,4 mm



▲ **20346.H.N**
HDMI outlet, Keystone connection, with 90° cable.
Depth: 30,5 mm



20348
VGA, 15-pin.
Depth: 11 mm



20348.B
VGA, 15-pin.
Depth: 11 mm



20348.N
VGA, 15-pin.
Depth: 11 mm

Signal reception socket outlets

Grey	White	Next
------	-------	------

















































Phone jack

 <p>20320 RJ11, 6-position, 4-contact (6/4). Depth: 33,6 mm</p> <p>20321 RJ12, 6-position, 6-contact (6/6). Depth: 33,6 mm</p> <p>20324 Israeli standard, screw terminals. Depth: 33,4 mm</p>	 <p>20320.B RJ11, 6-position, 4-contact (6/4). Depth: 33,6 mm</p> <p>20321.B RJ12, 6-position, 6-contact (6/6). Depth: 33,6 mm</p> <p>20324.B Israeli standard, screw terminals. Depth: 33,4 mm</p>	 <p>20320.N RJ11, 6-position, 4-contact (6/4). Depth: 33,6 mm</p> <p>20321.N RJ12, 6-position, 6-contact (6/6). Depth: 33,6 mm</p> <p>20324.N Israeli standard, screw terminals. Depth: 33,4 mm</p>
 <p>20327 8-contact, French standard - 2 modules. Depth: 22 mm</p>	 <p>20327.B 8-contact, French standard - 2 modules. Depth: 22 mm</p>	 <p>20327.N 8-contact, French standard - 2 modules. Depth: 22 mm</p>
 <p>20322 RJ11, 6-position 4-contact (6/4) + cover. Depth: 33,4 mm</p> <p>20323 RJ12, 6-position 6-contact (6/6) + cover. Depth: 33,4 mm</p> <p>20325' BT, MASTER. Depth: 33,4 mm</p> <p>20326' BT, SLAVE. Depth: 33,4 mm</p>	 <p>20322.B RJ11, 6-position 4-contact (6/4) + cover. Depth: 33,4 mm</p> <p>20323.B RJ12, 6-position 6-contact (6/6) + cover. Depth: 33,4 mm</p> <p>20325.B' BT, MASTER. Depth: 33,4 mm</p> <p>20326.B' BT, SLAVE. Depth: 33,4 mm</p>	 <p>20322.N RJ11, 6-position 4-contact (6/4) + cover. Depth: 33,4 mm</p> <p>20323.N RJ12, 6-position 6-contact (6/6) + cover. Depth: 33,4 mm</p> <p>20325.N' BT, MASTER. Depth: 33,4 mm</p> <p>20326.N' BT, SLAVE. Depth: 33,4 mm</p>

RJ45 data ports

 <p>20337.6 Cat. 6, UTP, shuttered. Depth: 26,1 mm</p> <p>▲ 20338.1 AT&T/Lucent T./Avaya, Cat. 5e, UTP. Depth: 22,3 mm</p> <p>▲ 20338.3 AMP/Tyco, Cat. 5e, UTP. Depth: 22,7 mm</p> <p>▲ 20338.4 AMP/Tyco, Cat. 5e, FTP. Depth: 32,1 mm</p>	 <p>20337.6.B Cat. 6, UTP, shuttered. Depth: 26,1 mm</p> <p>▲ 20338.1.B AT&T/Lucent T./Avaya, Cat. 5e, UTP. Depth: 22,3 mm</p>	 <p>20337.6.N Cat. 6, UTP, shuttered. Depth: 26,1 mm</p> <p>▲ 20338.1.N AT&T/Lucent T./Avaya, Cat. 5e, UTP. Depth: 22,3 mm</p> <p>▲ 20338.3.N AMP/Tyco, Cat. 5e, UTP. Depth: 22,7 mm</p> <p>▲ 20338.4.N AMP/Tyco, Cat. 5e, FTP. Depth: 32,1 mm</p>
 <p>20338.8 Netsafe, Cat. 5e, UTP. Depth: 23,6 mm</p> <p>20339.4 Netsafe, Cat. 5e, UTP 110. Depth: 24,7 mm</p> <p>20339.5 Netsafe, Cat. 5e, FTP 110. Depth: 36,15 mm</p> <p>20339.6 Netsafe, Cat. 6, UTP 110. Depth: 22,3 mm</p>	 <p>20338.8.B Netsafe, Cat. 5e, UTP. Depth: 23,6 mm</p> <p>20339.4.B Netsafe, Cat. 5e, UTP 110. Depth: 24,7 mm</p> <p>20339.5.B Netsafe, Cat. 5e, FTP 110. Depth: 36,15 mm</p> <p>20339.6.B Netsafe, Cat. 6, UTP 110. Depth: 22,3 mm</p>	 <p>20338.8.N Netsafe, Cat. 5e, UTP. Depth: 23,6 mm</p> <p>20339.4.N Netsafe, Cat. 5e, UTP 110. Depth: 24,7 mm</p> <p>20339.5.N Netsafe, Cat. 5e, FTP 110. Depth: 36,15 mm</p> <p>20339.6.N Netsafe, Cat. 6, UTP 110. Depth: 22,3 mm</p>
 <p>20339.11 Netsafe, Cat. 5e, UTP. Depth: 30,3 mm</p> <p>20339.13 Netsafe, Cat. 6, UTP. Depth: 30,3 mm</p> <p>20339.14 Netsafe, Cat. 6, FTP. Depth: 30,3 mm</p>	 <p>20339.11.B Netsafe, Cat. 5e, UTP. Depth: 30,3 mm</p> <p>20339.13.B Netsafe, Cat. 6, UTP. Depth: 30,3 mm</p> <p>20339.14.B Netsafe, Cat. 6, FTP. Depth: 30,3 mm</p>	 <p>20339.11.N Netsafe, Cat. 5e, UTP. Depth: 30,3 mm</p> <p>20339.13.N Netsafe, Cat. 6, UTP. Depth: 30,3 mm</p> <p>20339.14.N Netsafe, Cat. 6, FTP. Depth: 30,3 mm</p>

Signal reception socket outlets

Grey				White				Next			
RJ45 data ports											
											
▲20339.15 Netsafe, Cat. 6, UTP, Depth: 30,3 mm	20339.16 Netsafe, Cat. 6, FTP, Depth: 30,3 mm	20340.1 Panduit, Cat. 5e, UTP, Depth: 28,55 mm	▲20340.2 Panduit, Cat. 5e, FTP, Depth: 29,05 mm	▲20339.15.B Netsafe, Cat. 6, UTP, Depth: 30,3 mm	20339.16.B Netsafe, Cat. 6, FTP, Depth: 30,3 mm	20340.1.B Panduit, Cat. 5e, UTP, Depth: 28,55 mm	▲20340.2.B Panduit, Cat. 5e, FTP, Depth: 29,05 mm	▲20339.15.N Netsafe, Cat. 6, UTP, Depth: 30,3 mm	20339.16.N Netsafe, Cat. 6, FTP, Depth: 30,3 mm	20340.1.N Panduit, Cat. 5e, UTP, Depth: 28,55 mm	▲20340.2.N Panduit, Cat. 5e, FTP, Depth: 29,05 mm
Data ports											
											
20361 BNC, coaxial cable soldering. Depth: 11 mm	20365 9-pin, D-SUB, soldering - 2 modules. Depth: 11 mm	20361.B BNC, coaxial cable soldering. Depth: 11 mm	20365.B 9-pin, D-SUB, soldering - 2 modules. Depth: 11 mm	20361.N BNC, coaxial cable soldering. Depth: 11 mm	20365.N 9-pin, D-SUB, soldering - 2 modules. Depth: 11 mm						
Adapters for data ports											
											
20338.C RJ45, Cat. 5/6 AMP, Lucent T. Depth: 11 mm	20340.C For MINI-COM Panduit. Depth: 11 mm	▲20341.C For Cat. 5e and 6 Slim of Infra+, Merlin Gerin. Depth: 11 mm	▲20343.K Slanting adaptor for RJ45 Keystone. Depth: 11 mm	20338.C.B RJ45, Cat. 5/6 AMP, Lucent T. Depth: 11 mm	20340.C.B For MINI-COM Panduit. Depth: 11 mm	▲20341.C.B For Cat. 5e and 6 Slim of Infra+, Merlin Gerin. Depth: 11 mm	▲20343.K.B Slanting adaptor for RJ45 Keystone. Depth: 11 mm	20338.C.N RJ45, Cat. 5/6 AMP, Lucent T. Depth: 11 mm	20340.C.N For MINI-COM Panduit. Depth: 11 mm	▲20341.C.N For Cat. 5e and 6 Slim of Infra+, Merlin Gerin. Depth: 11 mm	▲20343.K.N Slanting adaptor for RJ45 Keystone. Depth: 11 mm
Sockets for fibre optic cable											
											
▲20350.SC Monomode 9/125 µm, with SC/ APC simplex adapter. Depth: 19,4 mm	▲20350.LC Monomode 9/125 µm, with LC duplex adapter. Depth: 19,7 mm	▲20351.SC Multimode 50/125 µm, with SC simplex adapter. Depth: 19,4 mm	▲20351.LC Multimode 50/125 µm, with LC duplex adapter. Depth: 17,9 mm	▲20350.SC.B Monomode 9/125 µm, with SC/ APC simplex adapter. Depth: 19,4 mm	▲20350.LC.B Monomode 9/125 µm, with LC duplex adapter. Depth: 19,7 mm	▲20351.SC.B Multimode 50/125 µm, with SC simplex adapter. Depth: 19,4 mm	▲20351.LC.B Multimode 50/125 µm, with LC duplex adapter. Depth: 17,9 mm	▲20350.SC.N Monomode 9/125 µm, with SC/ APC simplex adapter. Depth: 19,4 mm	▲20350.LC.N Monomode 9/125 µm, with LC duplex adapter. Depth: 19,7 mm	▲20351.SC.N Multimode 50/125 µm, with SC simplex adapter. Depth: 19,4 mm	▲20351.LC.N Multimode 50/125 µm, with LC duplex adapter. Depth: 17,9 mm
Coaxial TV-RD-SAT 5-2400 MHz socket outlets (output male and female)											
											
20300.01 Single connection, 1 dB. Depth: 26,8 mm	20300.10 Through-line, 10 dB. Depth: 26,8 mm	20300.01.B Single connection, 1 dB. Depth: 26,8 mm	20300.10.B Through-line, 10 dB. Depth: 26,8 mm	20300.01.N Single connection, 1 dB. Depth: 26,8 mm	20300.10.N Through-line, 10 dB. Depth: 26,8 mm						







⁸ Lamps and signalling units, page 75

⁷ Conform to BS 6312-2.1, BS 6312-2.2

Signal reception socket outlets

Grey	White	Next
------	-------	------

Coaxial TV-RD-SAT 5-2400 MHz socket outlets, demix (male and F-type outputs)

 20302.01 Single connection 1 dB - 2 modules. Depth: 22,4 mm	 20302.10 Through-line 10 dB - 2 modules. Depth: 22,4 mm	 20302.01.B Single connection 1 dB - 2 modules. Depth: 22,4 mm	 20302.10.B Through-line 10 dB - 2 modules. Depth: 22,4 mm	 20302.01.N Single connection 1 dB - 2 modules. Depth: 22,4 mm	 20302.10.N Through-line 10 dB - 2 modules. Depth: 22,4 mm
--	--	--	--	--	--







Coaxial TV-FM-SAT 5-2400 MHz socket outlets (male, female and F-type outputs)

 20303 Single connection 1 dB - 2 modules. Depth: 20,5 mm	 20303.B Single connection 1 dB - 2 modules. Depth: 20,5 mm	 20303.N Single connection 1 dB - 2 modules. Depth: 20,5 mm
--	--	--

F-type socket outlets

 20318 With F type female connector. Depth: 11 mm	 20318.B With F type female connector. Depth: 11 mm	 20318.N With F type female connector. Depth: 11 mm
--	--	--

Coaxial TV 40-862 MHz socket outlets (1 output: female)























 *20313 Single connection. Depth: 29,2 mm	 *20314 Through-line 20 dB. Depth: 29,2 mm	 *20313.B Single connection. Depth: 29,2 mm	 *20314.B Through-line 20 dB. Depth: 29,2 mm	 *20313.N Single connection. Depth: 29,2 mm	 *20314.N Through-line 20 dB. Depth: 29,2 mm
--	---	--	---	--	---

Adaptors for coaxial TV-RD-SAT socket outlets

 20319 For 2 or 3 outputs - 2 modules	 20319.B For 2 or 3 outputs - 2 modules	 20319.N For 2 or 3 outputs - 2 modules
--	--	--

Terminal resistor and coaxial TV-RD-SAT 2400 MHz connectors

 16330 Z 75 Ω, for frequencies up to 2400 MHz	 01644 Male, axial cable entry	 01645 Female, axial cable entry	 01634 Male, 90°-cable entry	 01635 Female, 90°-cable entry	 01654 Male F-type, for RG59 cable
---	---	---	---	---	--

Grey	White	Next
Electromechanical bells		
 20370 12 V~ (SELV) 50/60 Hz. Depth: 37 mm	 20372 120 V~ 50/60 Hz. Depth: 37 mm	 20373 230 V~ 50/60 Hz. Depth: 37 mm
 20370.B 12 V~ (SELV) 50/60 Hz. Depth: 37 mm	 20372.B 120 V~ 50/60 Hz. Depth: 37 mm	 20373.B 230 V~ 50/60 Hz. Depth: 37 mm
 20370.N 12 V~ (SELV) 50/60 Hz. Depth: 37 mm	 20372.N 120 V~ 50/60 Hz. Depth: 37 mm	 20373.N 230 V~ 50/60 Hz. Depth: 37 mm
Electronic bells		
 20380 3-sound-sequence, supply voltage 12 V~ and 12 Vdc (SELV) - 2 modules. Depth: 37 mm	 20380.B 3-sound-sequence, supply voltage 12 V~ and 12 Vdc (SELV) - 2 modules. Depth: 37 mm	 20380.N 3-sound-sequence, supply voltage 12 V~ and 12 Vdc (SELV) - 2 modules. Depth: 37 mm
Buzzers		
 20375 12 V~ (SELV) 50/60 Hz. Depth: 37 mm	 20377 120 V~ 50/60 Hz. Depth: 37 mm	 20378 230 V~ 50/60 Hz. Depth: 37 mm
 20375.B 12 V~ (SELV) 50/60 Hz. Depth: 37 mm	 20377.B 120 V~ 50/60 Hz. Depth: 37 mm	 20378.B 230 V~ 50/60 Hz. Depth: 37 mm
 20375.N 12 V~ (SELV) 50/60 Hz. Depth: 37 mm	 20377.N 120 V~ 50/60 Hz. Depth: 37 mm	 20378.N 230 V~ 50/60 Hz. Depth: 37 mm
Luminous indicator units (for signalling units*)		
 20386.B White diffuser. Depth: 23 mm	 20386.B.B White diffuser. Depth: 23 mm	 20386.B.N White diffuser. Depth: 23 mm
 Δ 20386.A Orange diffuser. Depth: 23 mm	 Δ 20386.R Red diffuser. Depth: 23 mm	 Δ 20386.V Green diffuser. Depth: 23 mm
 Δ 20386.A.B Orange diffuser. Depth: 23 mm	 Δ 20386.R.B Red diffuser. Depth: 23 mm	 Δ 20386.V.B Green diffuser. Depth: 23 mm
 Δ 20386.A.N Orange diffuser. Depth: 23 mm	 Δ 20386.R.N Red diffuser. Depth: 23 mm	 Δ 20386.V.N Green diffuser. Depth: 23 mm
Double indicator units (for 2 signalling units*)		
 20388 Neutral diffusers. Depth: 23 mm	 20388.B Neutral diffusers. Depth: 23 mm	 20388.N Neutral diffusers. Depth: 23 mm
 Δ 20388.AB Orange and white diffusers. Depth: 23 mm	 Δ 20388.AB.N Orange and white diffusers. Depth: 23 mm	

Signalling

Grey	White	Next
------	-------	------

Double indicator units (for 2 signalling units*)



Δ 20388.BR
White and red diffusers.
Depth: 23 mm



Δ 20388.AV.B
Orange and green diffusers.
Depth: 23 mm



Δ 20388.BR.B
White and red diffusers.
Depth: 23 mm



Δ 20388.RV.B
Red and green diffusers.
Depth: 23 mm



Δ 20388.AV.N
Orange and green diffusers.
Depth: 23 mm



Δ 20388.BR.N
White and red diffusers.
Depth: 23 mm



Δ 20388.RV.N
Red and green diffusers.
Depth: 23 mm

Prismatic indicator units - 2 modules (for 14770, 14771, 14776 and 14777 lamps - supplied without lamp)



Δ 20387.A
Orange diffuser.
Depth: 25 mm



20387.B
White diffuser.
Depth: 25 mm



20387.R
Red diffuser.
Depth: 25 mm



20387.V
Green diffuser.
Depth: 25 mm

Step marker lamps (with high-efficiency LED)



20381
230 V~ 50/60 Hz
20381.012
12 V~ 50/60 Hz or 12 Vdc (SELV).
Depth: 37 mm



20389
230 V~ 50/60 Hz - 2 modules
20389.120
As above, 120 V~.
Depth: 37 mm



20381.B
230 V~ 50/60 Hz
20381.012.B
12 V~ 50/60 Hz or 12 Vdc (SELV).
Depth: 37 mm



20389.B
230 V~ 50/60 Hz - 2 modules
20389.120.B
As above, 120 V~.
Depth: 37 mm



20381.N
230 V~ 50/60 Hz
20381.012.N
12 V~ 50/60 Hz or 12 Vdc (SELV).
Depth: 37 mm



20389.N
230 V~ 50/60 Hz - 2 modules
20389.120.N
As above, 120 V~.
Depth: 37 mm



20389.012
12 V~ 50/60 Hz or 12 Vdc (SELV) - 2 modules.
Depth: 37 mm



20389.012.B
12 V~ 50/60 Hz or 12 Vdc (SELV) - 2 modules.
Depth: 37 mm



20389.012.N
12 V~ 50/60 Hz or 12 Vdc (SELV) - 2 modules.
Depth: 37 mm

Lighting devices



20383
With high-efficiency LED, 120-230 V~ 50/60 Hz - 3 modules.
Depth: 37 mm



20383.B
With high-efficiency LED, 120-230 V~ 50/60 Hz - 3 modules.
Depth: 37 mm



20383.N
With high-efficiency LED, 120-230 V~ 50/60 Hz - 3 modules.
Depth: 37 mm



02671
With high-efficiency LED, 120-230 V~ 50/60 Hz and built-in 7-module frame.
Depth: 44,7 mm

Grey	White	Next
------	-------	------

TORCIA, electronic hand-lamps (with automatic emergency device)



20395
With high-efficiency LED,
230 V~ 50/60 Hz
- 2 modules.
Depth: 46 mm



20396
With high-efficiency LED,
120 V~ 50/60 Hz
- 2 modules.
Depth: 46 mm



20395.B
With high-efficiency LED,
230 V~ 50/60 Hz
- 2 modules.
Depth: 46 mm



20396.B
With high-efficiency LED,
120 V~ 50/60 Hz
- 2 modules.
Depth: 46 mm



20395.N
With high-efficiency LED,
230 V~ 50/60 Hz
- 2 modules.
Depth: 46 mm



20396.N
With high-efficiency LED,
120 V~ 50/60 Hz
- 2 modules.
Depth: 46 mm

Emergency lighting devices (with automatic emergency device)



20382
With high-efficiency LED,
230 V~ 50/60 Hz.
Depth: 37 mm



20382.B
With high-efficiency LED,
230 V~ 50/60 Hz.
Depth: 37 mm



20382.N
With high-efficiency LED,
230 V~ 50/60 Hz.
Depth: 37 mm



20384
With high-efficiency LED,
120-230 V~ 50/60 Hz
- 3 modules.
Depth: 37 mm



20384.B
With high-efficiency LED,
120-230 V~ 50/60 Hz
- 3 modules.
Depth: 37 mm



20384.N
With high-efficiency LED,
120-230 V~ 50/60 Hz
- 3 modules.
Depth: 37 mm

Emergency lighting devices



02661
With high-efficiency LED, 230 V~ 50/60 Hz,
rechargeable Ni-Cd battery and built-in
7-module frame
△ 02661.120
As above, 120 V~ 50/60 Hz.
Depth: 44,7 mm



20394
230 V~ 50/60 Hz, Ni-Cd battery, with FD 4W
G5 lamp and built-in 7-module frame.
Depth: 47,1 mm



02662
LED, controllable,
230 V~ 50 Hz
- 3 modules
02662.120
As above, 120 V~.
Depth: 39 mm



02663
LED RGB, controllable,
230 V~ 50 Hz
- 3 modules
02663.120
As above, 120 V~.
Depth: 39 mm

Rechargeable batteries



00908
3 x Ni-MH 1,2 V
800 mAh,
HR03 (AAA)



00910
Ni-MH 4,8 V 80 mAh
battery, spare part
for TORCIA



00911.1
Ni-Cd 2,4 V 1,3 Ah battery,
spare part for emergency
lighting devices (20394)






00913
Ni-Cd 4,8 V 800 mAh
spare rechargeable battery
for 02661 and 02661.120




Protection • Detection

Grey	White	Next
------	-------	------







Protection devices

 <p>20416 1P 16 A 250 V~ fuse carrier. Depth: 29 mm</p> <p>20417 230 V~ SPD transient voltage suppressor. Depth: 29 mm</p> <p>20417.R Spare part for 20417</p>	 <p>20416.B 1P 16 A 250 V~ fuse carrier. Depth: 29 mm</p> <p>20417.B 230 V~ SPD transient voltage suppressor. Depth: 29 mm</p>	 <p>20416.N 1P 16 A 250 V~ fuse carrier. Depth: 29 mm</p> <p>20417.N 230 V~ SPD transient voltage suppressor. Depth: 29 mm</p>
--	--	---


1P+N circuit breakers (120-230 V~ 50/60 Hz)

 <p>20405.06 C 6, breaking capacity 1500 A. Depth: 39 mm</p> <p>20405.10 C 10, breaking capacity 3000 A. Depth: 39 mm</p> <p>20405.16 C 16, breaking capacity 3000 A. Depth: 39 mm</p>	 <p>20405.06.B C 6, breaking capacity 1500 A. Depth: 39 mm</p> <p>20405.10.B C 10, breaking capacity 3000 A. Depth: 39 mm</p> <p>20405.16.B C 16, breaking capacity 3000 A. Depth: 39 mm</p>	 <p>20405.06.N C 6, breaking capacity 1500 A. Depth: 39 mm</p> <p>20405.10.N C 10, breaking capacity 3000 A. Depth: 39 mm</p> <p>20405.16.N C 16, breaking capacity 3000 A. Depth: 39 mm</p>
--	---	--



















1P+N residual current breakers with overcurrent protection (RCBO) (120-230 V~ 50/60 Hz)

 <p>20411.06 C 6, $I_{\Delta n}$ 10 mA breaking capacity 1500 A - 2 modules. Depth: 39 mm</p> <p>20411.10 C 10, $I_{\Delta n}$ 10 mA breaking capacity 3000 A - 2 modules. Depth: 39 mm</p>	 <p>20411.06.B C 6, $I_{\Delta n}$ 10 mA breaking capacity 1500 A - 2 modules. Depth: 39 mm</p> <p>20411.10.B C 10, $I_{\Delta n}$ 10 mA breaking capacity 3000 A - 2 modules. Depth: 39 mm</p>	 <p>20411.06.N C 6, $I_{\Delta n}$ 10 mA breaking capacity 1500 A - 2 modules. Depth: 39 mm</p> <p>20411.10.N C 10, $I_{\Delta n}$ 10 mA breaking capacity 3000 A - 2 modules. Depth: 39 mm</p>
 <p>20411.16 C 16, $I_{\Delta n}$ 10 mA breaking capacity 3000 A - 2 modules. Depth: 39 mm</p> <p>20411.16.6 C 16, $I_{\Delta n}$ 6 mA breaking capacity 3000 A - 2 modules. Depth: 39 mm</p>	 <p>20411.16.B C 16, $I_{\Delta n}$ 10 mA breaking capacity 3000 A - 2 modules. Depth: 39 mm</p> <p>20411.16.6.B C 16, $I_{\Delta n}$ 6 mA breaking capacity 3000 A - 2 modules. Depth: 39 mm</p>	 <p>20411.16.N C 16, $I_{\Delta n}$ 10 mA breaking capacity 3000 A - 2 modules. Depth: 39 mm</p> <p>20411.16.6.N C 16, $I_{\Delta n}$ 6 mA breaking capacity 3000 A - 2 modules. Depth: 39 mm</p>

Detectors (230 V~ 50/60 Hz)

 <p>20420 Gas Stop Metano, methane gas detector, solenoid valve control - 3 modules. Depth: 37 mm</p> <p>20421 Gas Stop GPL, LPG gas detector, solenoid valve control - 3 modules. Depth: 37 mm</p>	 <p>20420.B Gas Stop Metano, methane gas detector, solenoid valve control - 3 modules. Depth: 37 mm</p> <p>20421.B Gas Stop GPL, LPG gas detector, solenoid valve control - 3 modules. Depth: 37 mm</p>	 <p>20420.N Gas Stop Metano, methane gas detector, solenoid valve control - 3 modules. Depth: 37 mm</p> <p>20421.N Gas Stop GPL, LPG gas detector, solenoid valve control - 3 modules. Depth: 37 mm</p>
--	---	--



Grey	White	Next
Switches for fan-coil regulation		
 <p>20095 Slide, 1P 6(2) A 250 V~, 4-position. Depth: 40 mm</p>	 <p>20096 Rotary, 1P 6(3) A 250 V~, 4-position - 2 modules. Depth: 37 mm</p>	 <p>20095.N Slide, 1P 6(2) A 250 V~, 4-position. Depth: 40 mm</p>
 <p>20095.B Slide, 1P 6(2) A 250 V~, 4-position. Depth: 40 mm</p>	 <p>20096.B Rotary, 1P 6(3) A 250 V~, 4-position - 2 modules. Depth: 37 mm</p>	 <p>20096.N Rotary, 1P 6(3) A 250 V~, 4-position - 2 modules. Depth: 37 mm</p>
Electronic thermostats (heating and air-conditioning, 120-230 V~ 50/60 Hz)		
 <p>02950 Touch screen thermostat for ON/OFF and PID temperature control, 1 input for temperature sensor, 1 multi-function input, 5(2) A 230 V~ change-over relay output - 2 modules. Depth: 38,5 mm</p>	 <p>02950.B Touch screen thermostat for ON/OFF and PID temperature control, 1 input for temperature sensor, 1 multi-function input, 5(2) A 230 V~ change-over relay output - 2 modules. Depth: 38,5 mm</p>	 <p>02950.BN Touch screen thermostat for ON/OFF and PID temperature control, 1 input for temperature sensor, 1 multi-function input, 5(2) A 230 V~ change-over relay output - 2 modules. Depth: 38,5 mm</p>
Electronic timer-thermostats (heating and air-conditioning)		
 <p>02955 Touch screen timer-thermostat for ON/OFF and PID temperature control, 1 input for temperature sensor, 1 multi-function input, 1 RJ9 input for energy meter (02960), 5(2) A 230 V~ change-over relay output - 3 modules. Depth: 35,3 mm</p>	 <p>02955.B Touch screen timer-thermostat for ON/OFF and PID temperature control, 1 input for temperature sensor, 1 multi-function input, 1 RJ9 input for energy meter (02960), 5(2) A 230 V~ change-over relay output - 3 modules. Depth: 35,3 mm</p>	 <p>02955.BN Touch screen timer-thermostat for ON/OFF and PID temperature control, 1 input for temperature sensor, 1 multi-function input, 1 RJ9 input for energy meter (02960), 5(2) A 230 V~ change-over relay output - 3 modules. Depth: 35,3 mm</p>
 <p>20445 6(2) A 230 V~ change-over relay output, 120-230 V~ 50/60 Hz - 2 modules. Depth: 37 mm</p>	 <p>20445.B 6(2) A 230 V~ change-over relay output, 120-230 V~ 50/60 Hz - 2 modules. Depth: 37 mm</p>	 <p>20445.N 6(2) A 230 V~ change-over relay output, 120-230 V~ 50/60 Hz - 2 modules. Depth: 37 mm</p>
 <p>20446 5(2) A 250 V~ change-over relay output, AA LR6 1,5 V battery (supplied) - 3 modules. Depth: 43 mm</p>	 <p>20446.B 5(2) A 250 V~ change-over relay output, AA LR6 1,5 V battery (supplied) - 3 modules. Depth: 43 mm</p>	 <p>20446.N 5(2) A 250 V~ change-over relay output, AA LR6 1,5 V battery (supplied) - 3 modules. Depth: 43 mm</p>

Comfort

Grey	White	Next
------	-------	------

Power meter - Devices for DIN rail (60715 TH35) installation



02960

Power meter, 3 inputs for sensor 01457,
50 W-10 kW detectable power,
for DIN (60715 TH35) rail installation 1x17,5 mm.
Supplied with 01457

Temperature sensor and moisture meter



20432
Electronic
temperature sensor.
Depth: 24,4 mm



20433
Electronic humidity sensor,
1 0-10 V or 4-20 mA
output - 2 modules.
Depth: 37 mm



20432.B
Electronic
temperature sensor.
Depth: 24,4 mm



20433.B
Electronic humidity sensor,
1 0-10 V or 4-20 mA
output - 2 modules.
Depth: 37 mm



20432.N
Electronic
temperature sensor.
Depth: 24,4 mm



20433.N
Electronic humidity sensor,
1 0-10 V or 4-20 mA
output - 2 modules.
Depth: 37 mm



02965.1

Wired temperature sensor,
NTC 10 kΩ,
cable length 3 m

Clocks (120-230 V~ 50/60 Hz)



20448
24h/7day timer-switch, 1-canal,
8 A 230 V~ change-over relay
output - 2 modules.
Depth: 37 mm



20448.B
24h/7day timer-switch, 1-canal,
8 A 230 V~ change-over relay
output - 2 modules.
Depth: 37 mm



20448.N
24h/7day timer-switch, 1-canal,
8 A 230 V~ change-over relay
output - 2 modules.
Depth: 37 mm



20449
Electronic alarm
clock - 2 modules.
Depth: 37 mm



20449.B
Electronic alarm
clock - 2 modules.
Depth: 37 mm



20449.N
Electronic alarm
clock - 2 modules.
Depth: 37 mm

Comfort - Systems

Grey	White	Next
------	-------	------

Speakers



21588
Passive speaker, 8 Ω 10 W, with built-in 8-module mounting frame. Depth: 48 mm




21588.B
Passive speaker, 8 Ω 10 W, with built-in 8-module mounting frame. Depth: 48 mm



21588.N
Passive speaker, 8 Ω 10 W, with built-in 8-module mounting frame. Depth: 48 mm



20587
Passive speaker, 8 Ω 3 W - 3 modules. Depth: 40 mm



20587.B
Passive speaker, 8 Ω 3 W - 3 modules. Depth: 40 mm



20587.N
Passive speaker, 8 Ω 3 W - 3 modules. Depth: 40 mm

Video door entry system



21554
4,3" Full Flat, for Due Fili Plus video door system and control, temperature sensor input, with built-in 8-module mounting frame. Depth: 46,7 mm



21554.B
4,3" Full Flat, for Due Fili Plus video door system and control, temperature sensor input, with built-in 8-module mounting frame. Depth: 46,7 mm



21554.BN
4,3" Full Flat, for Due Fili Plus video door system and control, temperature sensor input, with built-in 8-module mounting frame. Depth: 46,7 mm



01963
Due Fili Plus video door entry system module



20557
Speakerphone for Due Fili system - 3 modules. Depth: 37 mm



20577
Call button for Due Fili system - 3 modules. Depth: 37 mm



20557.B
Speakerphone for Due Fili system - 3 modules. Depth: 37 mm



20577.B
Call button for Due Fili system - 3 modules. Depth: 37 mm



20557.N
Speakerphone for Due Fili system - 3 modules. Depth: 37 mm



20577.N
Call button for Due Fili system - 3 modules. Depth: 37 mm



Δ 20560
Inner color video camera. Depth: 37 mm



20565
Inner color video camera and built-in microphone - 2 modules. Depth: 26,5 mm



20570
Inner light, with LED. Depth: 37 mm



Δ 20560.B
Inner color video camera. Depth: 37 mm



20565.B
Inner color video camera and built-in microphone - 2 modules. Depth: 26,5 mm



20570.B
Inner light, with LED. Depth: 37 mm



Δ 20560.N
Inner color video camera. Depth: 37 mm



20565.N
Inner color video camera and built-in microphone - 2 modules. Depth: 26,5 mm



20570.N
Inner light, with LED. Depth: 37 mm

Grey	White	Next
------	-------	------

Stand-alone radio devices - EnOcean® technology (868 MHz)



20505
2 flat rocker buttons with EnOcean® wireless connection, no battery, to complete with 20506 - 2 modules



▲ 01796.1
EnOcean® multifunction actuator, NO 8 A 230 V~ relay output, supply voltage 230 V~ 50/60 Hz



Δ 01796
Actuator with EnOcean® module, relay output, supply voltage 230 V~ 50 Hz

Stand-alone radio devices - ZigBee technology 802.15.4 (2.4 GHz)



▲ 03905
2 flat rocker buttons with 2.4 GHz standard 802.15.4 wireless connection, ZigBee certified, no battery, to complete with 20506 - 2 modules

Stand-alone radio devices - Accessories



20507
Frame for surface mounting of 20505, grey



20507.B
Frame for surface mounting of 20505, white



21507
Frame for surface mounting of 20505, only for Eikon Evo cover plate, grey



21507.B
Frame for surface mounting of 20505, only for Eikon Evo cover plate, white



20506
Pair of buttons for 20505 and 03905 devices, customizable



20506.B
Pair of buttons for 20505 and 03905 devices, customizable



20506.N
Pair of buttons for 20505 and 03905 devices, customizable

Access control system



20461
Smart card reader/programmer, 12-24 V~ 50/60 Hz/ 12-24 Vdc (SELV) - 3 modules. Depth: 37 mm



20461.B
Smart card reader/programmer, 12-24 V~ 50/60 Hz/ 12-24 Vdc (SELV) - 3 modules. Depth: 37 mm



20461.N
Smart card reader/programmer, 12-24 V~ 50/60 Hz/ 12-24 Vdc (SELV) - 3 modules. Depth: 37 mm

Grey	White	Next
------	-------	------

Access control system

 <p>▲ 20463 Electronic switch, vertical pocket, 120-230 V~ 50/60 Hz - 2 modules. Depth: 20,5 mm</p>	 <p>20465 Electronic switch, vertical pocket, 230 V~ 50/60 Hz, 24 V~/24 Vdc (SELV) - 3 modules. Depth: 37 mm</p>	 <p>▲ 20463.B Electronic switch, vertical pocket, 120-230 V~ 50/60 Hz - 2 modules. Depth: 20,5 mm</p>	 <p>20465.B Electronic switch, vertical pocket, 230 V~ 50/60 Hz, 24 V~/24 Vdc (SELV) - 3 modules. Depth: 37 mm</p>	 <p>▲ 20463.N Electronic switch, vertical pocket, 120-230 V~ 50/60 Hz - 2 modules. Depth: 20,5 mm</p>	 <p>20465.N Electronic switch, vertical pocket, 230 V~ 50/60 Hz, 24 V~/24 Vdc (SELV) - 3 modules. Depth: 37 mm</p>
 <p>16452 Programmable smart card 16452.H As above, customizable</p>	 <p>16452.S ISO-card (badge)</p>				

Bus access control system

 <p>20470 Transponder card and key reader - 2 modules. Depth: 26,5 mm</p>	 <p>20471 Smart card reader and programmer - 3 modules. Depth: 37 mm</p>	 <p>20470.B Transponder card and key reader - 2 modules. Depth: 26,5 mm</p>	 <p>20471.B Smart card reader and programmer - 3 modules. Depth: 37 mm</p>	 <p>20470.N Transponder card and key reader - 2 modules. Depth: 26,5 mm</p>	 <p>20471.N Smart card reader and programmer - 3 modules. Depth: 37 mm</p>
 <p>20472 Actuator with 3 A 30 V change-over relay output - 2 modules. Depth: 26,5 mm</p>	 <p>20472.B Actuator with 3 A 30 V change-over relay output - 2 modules. Depth: 26,5 mm</p>	 <p>20472.N Actuator with 3 A 30 V change-over relay output - 2 modules. Depth: 26,5 mm</p>			
 <p>20473 Smart card programmer in table mounting box - 4 modules</p>	 <p>20473.B Smart card programmer in table mounting box - 4 modules</p>	 <p>20473.N Smart card programmer in table mounting box - 4 modules</p>			
 <p>01816 Transponder card 01816.H As above, customizable</p>	 <p>01815 Transponder key</p>	 <p>16452 Programmable smart card 16452.H As above, customizable</p>	 <p>16474 Smart card for serial connection of reader/programmer</p>		
 <p>01400 Supply unit, 29 Vdc 400 mA output, 230 V~ 50/60 Hz, 2 x 17,5 mm modules</p>	 <p>01401 Supply unit, 29 Vdc 1280 mA output, 120-230 V~ 50/60 Hz, 8 x 17,5 mm modules</p>	 <p>▲ 01800 Supply unit, 29 Vdc 320 mA output, 120-230 V~ 50/60 Hz, 6 x 17,5 mm modules</p>			

Grey	White	Next
------	-------	------

By-alarm: burglar alarm system - System components



01700
Control panel, 230 V~ 50 Hz,
8 local inputs expandable to 24,
surface mounting
▲ **01700.DE**
As above,
in German language
01700.120
As above,
120 V~ 60 Hz



01703
Control panel, 230 V~ 50 Hz,
8 local inputs expandable to 64,
surface mounting
▲ **01703.DE**
As above,
in German language
01703.120
As above,
120 V~ 60 Hz



01705
LED keypad with display,
12 Vdc, surface mounting
▲ **01705.DE**
As above,
in German language



01715
Siren for outdoor use
01716
Dummy siren for
outdoor use



01717
Additional power supply unit,
230 V~ 50/60 Hz 1,5 A,
surface mounting
01717.120
As above, 120 V~



01707
GSM Dual Band
high-gain aerial



01706
GSM Dual Band GSM/GPRS 900/1800 MHz
transmitter/receiver module



01708
PSTN communicator
for control panel



01709
4-input expansion
module



01710
4-output expansion
module



01713.EN
Voice synthesis
module for control
panel, in English



01714
Tear-proof box for expansion
modules, surface mounting



01712
Interface for Ethernet network
(LAN) and By-me home auto-
mation system (via Web server
01945, 01946), remote and
local supervision/control over IP



01725
Configuration cables
and interfaces



01711
Isolated interface
for Bus signal
regeneration

By-alarm: burglar alarm system - Devices



20478
Activator/
partialiser.
Depth:
41,4 mm



20479
IR and microwaves
presence detector
~ 2 modules.
Depth: 26,5 mm



20478.B
Activator/
partialiser.
Depth:
41,4 mm



20479.B
IR and microwaves
presence detector
~ 2 modules.
Depth: 26,5 mm



20478.N
Activator/
partialiser.
Depth:
41,4 mm



20479.N
IR and microwaves
presence detector
~ 2 modules.
Depth: 26,5 mm



▲ **01718.G**
Transponder key,
green



▲ **01718.Y**
Transponder key,
yellow



▲ **01718**
Transponder key

Grey	White	Next
------	-------	------

By-alarm: burglar alarm system - Devices



20496
Indoor siren
- 3 modules.
Depth: 37 mm



20496.B
Indoor siren
- 3 modules.
Depth: 37 mm



20496.N
Indoor siren
- 3 modules.
Depth: 37 mm



01720
Passive infrared and
microwave dual technolo-
gy detector, PET immune,
surface mounting



01721
Passive infrared and
microwave dual technology
detector, anti-masking
and anti-crawl, surface
mounting



01723
Dual technology curtain
detector, IP54 for outdoor
use for entrances and
windows, surface mounting



01820
Flush mounting
magnetic contact



01821
Metal flush mounting
magnetic contact



01822
Visible surface
magnetic contact



01722
Dual technology curtain
detector, for entrances
and windows, surface
mounting



01724
Water detector for
protection against floo-
ding, floor mounting



01823
Magnetic contact in
metal enclosure for
visual installation



01825
Electromechanical
cordoperated contact
for rolling shutters
protection



01826
Electromechanical inertial
contact for windows and
doors protection

By-alarm: burglar alarm system - Radiofrequency devices



01727
Detector with magnetic
contact for doors and
windows



01728
Infrared detector



01729
Two-way 868 MHz radiofrequency
interface



01730
Two-way 868 MHz
radio frequency
remote control

By-alarm: burglar alarm system - Cables



01732
By-alarm system cable,
halogen-free 2x0,22 mm²,
suitable for I category
cables (U0 = 400 V),
white - 100 m



01733
By-alarm system cable,
halogen-free 2x0,50 mm²,
suitable for I category
cables (U0 = 400 V),
white - 100 m



01734
By-alarm system cable,
halogen-free 2x0,50 mm²
+ 4x0,22 mm², suitable for I
category cables (U0 = 400 V),
white - 100 m



01735
By-alarm system cable,
halogen-free 2x0,50 mm²
+ 6x0,22 mm², suitable for I
category cables (U0 = 400 V),
white - 100 m

Home automation

Grey	White	Next
------	-------	------

By-me: supervising - 10" IP multimedia video touch screen



21553.2
10" IP multimedia video touch screen for Due Fili Plus video door system and By-me system supervising by web server

By-me: supervising - Video touch screen



21554
4,3" Full Flat, for Due Fili Plus video door system and control, temperature sensor input, with built-in 8-module mounting frame. Depth: 46,7 mm



21554.B
4,3" Full Flat, for Due Fili Plus video door system and control, temperature sensor input, with built-in 8-module mounting frame. Depth: 46,7 mm



21554.BN
4,3" Full Flat, for Due Fili Plus video door system and control, temperature sensor input, with built-in 8-module mounting frame. Depth: 46,7 mm



01963
Due Fili Plus video door entry system module

By-me: supervising - Touch screens



21511.1
4,3" Full Flat, for control, temperature sensor input, with built-in 8-module mounting frame. Depth: 39,9 mm



21511.1.B
4,3" Full Flat, for control, temperature sensor input, with built-in 8-module mounting frame. Depth: 39,9 mm



21511.1.BN
4,3" Full Flat, for control, temperature sensor input, with built-in 8-module mounting frame. Depth: 39,9 mm



21512.1
For control, temperature sensor input - 3 modules. Depth: 37 mm



21512.1.B
For control, temperature sensor input - 3 modules. Depth: 37 mm



21512.1.BN
For control, temperature sensor input - 3 modules. Depth: 37 mm

Home automation

Grey	White	Next
------	-------	------

By-me: supervising - Devices for DIN rail (60715 TH35) installation



01942
GSM phone dial, for direct connection to Bus 12-24 V~ 50/60 Hz or 12-30 Vdc (SELV), 6 x 17,5 mm modules



01945
Web server for local and remote control of the By-me system via IP, 8 x 17,5 mm modules



01946
Web server Light for local and remote control of the By-me system via IP, manages up to 64 devices, 8 x 17,5 mm modules

By-me: system components - Control units



21509
For control and configuration, touch display, temperature sensor input, with V51923 frame for DIN (60715 TH35) rail installation - 3 modules. Supplied with RJ45 socket connector and V51921 frame. Depth: 37 mm



21509.B
For control and configuration, touch display, temperature sensor input, with V51923 frame for DIN (60715 TH35) rail installation - 3 modules. Supplied with RJ45 socket connector and V51921 frame. Depth: 37 mm



21509.N
For control and configuration, touch display, temperature sensor input, with V51923 frame for DIN (60715 TH35) rail installation - 3 modules. Supplied with RJ45 socket connector and V51921 frame. Depth: 37 mm



V51921

V51923

1-module and 3-module frame for DIN rail (60715 TH35) and nib for touch screen

By-me: system components - Software and interfaces



01993
Hardware interface for By-me and Well-contact Plus touch screens + By-me system programming by Bus with RJ11 socket. It is necessary EasyTool Professional and touch screen configuration software

By-me: system components - Supply unit



20580
Supply unit, 32 Vdc 100 mA output, 110-230 V~ 50/60 Hz. Depth: 40 mm



20580.B
Supply unit, 32 Vdc 100 mA output, 110-230 V~ 50/60 Hz. Depth: 40 mm



20580.N
Supply unit, 32 Vdc 100 mA output, 110-230 V~ 50/60 Hz. Depth: 40 mm

Grey	White	Next
------	-------	------

By-me: system components - Devices for DIN rail (60715 TH35) installation



01468
Logic unit for logic, mathematical, timing and messaging functions, 1 x 17,5 mm modules



01400
Supply unit, 29 Vdc 400 mA output, 230 V~ 50/60 Hz, 2 x 17,5 mm modules



01401
Supply unit, 29 Vdc 1280 mA output, 120-230 V~ 50/60 Hz, 8 x 17,5 mm modules



01830
Supply unit 12 Vdc output, 120-230 V~ 50/60 Hz, 4 x 17,5 mm modules



▲ 01845.1
Line coupler, 2 x 17,5 mm modules



Δ 01845
Line coupler, 3 x 17,5 mm modules

By-me: system components - Special Bus RJ11 jacks



20329
Special jack for Bus, screw terminals. Depth: 33,6 mm



20329.B
Special jack for Bus, screw terminals. Depth: 33,6 mm



20329.N
Special jack for Bus, screw terminals. Depth: 33,6 mm

By-me: system components - Accessories and cables



01840
Bus system cable, halogen-free 2x0,50 mm², rated operating voltage to earth 300/500 V, suitable for I category cables, white - 100 m



01841
Bus system cable, halogen-free 2x0,50 mm² - 100 m



01839
Removable 2 screw terminals, for Bus system

By-me: video door entry - Devices



20557
Speakerphone for Due Fili system - 3 modules Depth: 37 mm



20577
Call button for Due Fili system - 3 modules Depth: 37 mm



20557.B
Speakerphone for Due Fili system - 3 modules Depth: 37 mm



20577.B
Call button for Due Fili system - 3 modules Depth: 37 mm



20557.N
Speakerphone for Due Fili system - 3 modules Depth: 37 mm



20577.N
Call button for Due Fili system - 3 modules Depth: 37 mm



Δ 20560
Inner color video camera. Depth: 37 mm



20565
Inner color video camera and built-in microphone - 2 modules. Depth: 26,5 mm



20570
Inner light, with LED. Depth: 37 mm



Δ 20560.B
Inner color video camera. Depth: 37 mm



20565.B
Inner color video camera and built-in microphone - 2 modules. Depth: 26,5 mm



20570.B
Inner light, with LED. Depth: 37 mm



Δ 20560.N
Inner color video camera. Depth: 37 mm



20565.N
Inner color video camera and built-in microphone - 2 modules. Depth: 26,5 mm



20570.N
Inner light, with LED. Depth: 37 mm

By-me: video door entry - Cables



732H/100
Due Fili Plus cable for internal laying, 2x1 mm² twisted conductors, PVC sheath, operating temperature -25/+70 °C, insulation degree 450/750 V, not suitable for running through underground channels - 100 m bundle

732H/500
As above, 500 m bundle



732I/100
Due Fili Plus cable for internal/external laying, 2x1 mm² twisted conductors, LSZH sheath and insulation, operating temperature -25/+70 °C, insulation degree 600/1000 V, suitable for laying underground in dry ducting or channels with efficient drainage (max. 24 hrs wet), not suitable for laying directly underground - 100 m bundle

732I/500
As above, 500 m bundle

Home automation

Grey	White	Next
------	-------	------

By-me: temperature control


02951

Touch screen thermostat for ON/OFF, PWM and PID temperature control, for 2- and 4-pipe systems, 3-speed/proportional fan coil control, 1 input for NTC sensor
- 2 modules. Depth: 38,5 mm


02951.B

Touch screen thermostat for ON/OFF, PWM and PID temperature control, for 2- and 4-pipe systems, 3-speed/proportional fan coil control, 1 input for NTC sensor
- 2 modules. Depth: 38,5 mm


02951.BN

Touch screen thermostat for ON/OFF, PWM and PID temperature control, for 2- and 4-pipe systems, 3-speed/proportional fan coil control, 1 input for NTC sensor
- 2 modules. Depth: 38,5 mm

By-me: temperature control - Electronic sensors


20538

Temperature probe for ON/OFF, PWM, PID and dew point control, for 2- and 4-pipe systems, 3-speed/proportional fan coil control, 1 input for NTC sensor.
Depth: 40 mm


20433

Electronic humidity sensor, 1 0-10 V or 4-20 mA output
- 2 modules. Depth: 37 mm


20432

Electronic temperature sensor.
Depth: 24,4 mm


20538.B

Temperature probe for ON/OFF, PWM, PID and dew point control, for 2- and 4-pipe systems, 3-speed/proportional fan coil control, 1 input for NTC sensor.
Depth: 40 mm


20433.B

Electronic humidity sensor, 1 0-10 V or 4-20 mA output
- 2 modules. Depth: 37 mm


20432.B

Electronic temperature sensor.
Depth: 24,4 mm


20538.N

Temperature probe for ON/OFF, PWM, PID and dew point control, for 2- and 4-pipe systems, 3-speed/proportional fan coil control, 1 input for NTC sensor.
Depth: 40 mm


20433.N

Electronic humidity sensor, 1 0-10 V or 4-20 mA output
- 2 modules. Depth: 37 mm


20432.N

Electronic temperature sensor.
Depth: 24,4 mm


02965.1

Wired temperature sensor, NTC 10 k Ω , cable length 3 m

By-me: temperature control - Weather station


01546

Weather station, KNX standard, power supply 12-32 Vdc or 12-24 Vac

Grey	White	Next
------	-------	------

By-me: temperature control - Devices for DIN rail (60715 TH35) installation



01400
Supply unit, 29 Vdc
400 mA output,
230 V~ 50/60 Hz,
2 x 17,5 mm
modules



01401
Supply unit, 29 Vdc
1280 mA output,
120-230 V~ 50/60 Hz,
8 x 17,5 mm modules



01465
Climate control device for heating systems,
power supply 120-230 V~ 50/60 Hz, 3
inputs for PT100, PT1000 and NTC probes,
1 mixer valve control output, 1 0-10 V or (0)
4-20 mA output, 1 16 A 230 V~ change-over
relay output, 6 x 17,5 mm modules

By-me: energy management - Loads control



20537
Actuator with relay output 16 A
120-230 V~ 50/60 Hz with
incorporated current sensor
- 2 modules. Depth: 37 mm



20537.B
Actuator with relay output 16 A
120-230 V~ 50/60 Hz with
incorporated current sensor
- 2 modules. Depth: 37 mm



20537.N
Actuator with relay output 16 A
120-230 V~ 50/60 Hz with
incorporated current sensor
- 2 modules. Depth: 37 mm



01451
Energy meter with
incorporated current
sensor, measurable
powers up to 3680 W,
flush mounting (retrofit)



01452
Pulse counter interface
for measuring data
from devices fitted with
pulse outputs, such as
electricity, water and gas
meters, flush mounting
(retrofit)



01457
Toroidal current sensor
for load control and
power measurement,
hole diameter 7,5 mm,
cable length 40 cm



01458
Toroidal current sensor
for load control and
power measurement,
hole diameter 19 mm,
cable length 40 cm



01459
Toroidal differential
current sensor for power
measurement, hole
diameter 9 mm,
cable length 40 cm

By-me: energy management - Loads control - Devices for DIN rail (60715 TH35) installation



01450
Energy meter, 3 x inputs
toroidal sensor,
25 W-100 kW,
120-230 V 50/60 Hz,
230/400 V 50/60 Hz,
1 x 17,5 mm modules.
Supplied with toroidal current
sensor 01457



01455
Load control module,
3 x inputs toroidal
sensor, 25 W-100 kW,
120-230 V 50/60 Hz,
230/400 V 50/60 Hz,
1 x 17,5 mm modules.
Supplied with toroidal
current sensor 01457



01456
Actuator, 16 A
120-230 V~
50/60 Hz relay
output for toroidal
differential
current sensor,
1 x 17,5 mm
modules



01400
Supply unit, 29 Vdc
400 mA output,
230 V~ 50/60 Hz,
2 x 17,5 mm
modules



01401
Supply unit, 29 Vdc
1280 mA output,
120-230 V~ 50/60 Hz,
8 x 17,5 mm modules

Home automation

Grey	White	Next
------	-------	------

By-me: automation - Eikon Tactil devices



21520
4 programmable buttons for 2 single controls or scenes - 2 modules.
Depth: 38 mm



21540
6 programmable buttons for 3 single controls or scenes - 2 modules.
Depth: 38 mm

By-me: automation - Labels



21847
8 sheets of stickers with symbols and words for Eikon Tactil devices

By-me: automation - Devices



20520
2 simple push buttons - 2 modules.
Depth: 26,5 mm



20525
2 simple push buttons + 8 A 120-230 V~ change-over relay output actuator - 2 modules.
Depth: 37 mm



20521
2 rocker push buttons - 2 modules.
Depth: 26,5 mm



20526
2 rocker push buttons + 8 A 120-230 V~ change-over relay output actuator - 2 modules.
Depth: 37 mm



20527
2 rocker push buttons + cosφ 0,6 2 A 120-230 V~ actuator for 1 rolling shutter - 2 modules.
Depth: 37 mm



20527.1
2 rocker push buttons + actuator 1 roller shutter laths positioning, cosφ 0,6 2 A 120-230 V~ - 2 modules.
Depth: 37 mm



20529
2 rocker push buttons + SLAVE-dimmer actuator - 2 modules. Depth: 37 mm



20529.120
2 rocker push buttons + 120 V~ SLAVE-dimmer actuator - 2 modules. Depth: 37 mm

By-me: automation - Devices



20540
3 simple push buttons - 3 modules.
Depth: 37 mm



20545
3 simple push buttons + 8 A 120-230 V~ change-over relay output actuator - 3 modules.
Depth: 37 mm



20541
3 rocker push buttons - 3 modules.
Depth: 37 mm



20546
3 rocker push buttons + 8 A 120-230 V~ change-over relay output actuator - 3 modules.
Depth: 37 mm



20547
3 rocker push buttons + 3,5 A 120-230 V~ actuator for 1 rolling shutter - 3 modules.
Depth: 37 mm



20549
3 rocker push buttons + 40-300 W / 40-200 VA MASTER dimmer actuator - 3 modules.
Depth: 37 mm







Home automation

Grey	White	Next
------	-------	------

By-me: automation - 1-module interchangeable buttons

 <p>20531 No symbol, for simple push buttons 20531.0 As above, customizable</p> <p>20531.S No symbol, for rocker push buttons 20531.S0 As above, customizable</p> <p>20531.20 ON/OFF symbol for rocker push buttons</p> <p>20531.21 Arrows symbol, for rocker push buttons</p>	 <p>20531.B No symbol, for simple push buttons 20531.0.B As above, customizable</p> <p>20531.S.B No symbol, for rocker push buttons 20531.S0.B As above, customizable</p> <p>20531.20.B ON/OFF symbol for rocker push buttons</p> <p>20531.21.B Arrows symbol, for rocker push buttons</p>	 <p>20531.N No symbol, for simple push buttons 20531.0.N As above, customizable</p> <p>20531.S.N No symbol, for rocker push buttons 20531.S0.N As above, customizable</p> <p>20531.20.N ON/OFF symbol for rocker push buttons</p> <p>20531.21.N Arrows symbol, for rocker push buttons</p>
 <p>20531.1T 1 name-plate, simple push buttons</p> <p>20531.2T 2 name-plates, for rocker push buttons</p> <p>20531.25 Universal regulation symbols, for rocker push buttons</p>	 <p>20531.1T.B 1 name-plate, simple push buttons</p> <p>20531.2T.B 2 name-plates, for rocker push buttons</p> <p>20531.25.B Universal regulation symbols, for rocker push buttons</p>	 <p>20531.1T.N 1 name-plate, simple push buttons</p> <p>20531.2T.N 2 name-plates, for rocker push buttons</p> <p>20531.25.N Universal regulation symbols, for rocker push buttons</p>

By-me: automation - 2-module interchangeable buttons

 <p>20532 No symbol, for simple push buttons 20532.0 As above, customizable</p> <p>20532.S No symbol, for rocker push buttons 20532.S0 As above, customizable</p> <p>20532.20 ON/OFF symbol for rocker push buttons</p>	 <p>20532.B No symbol, for simple push buttons 20532.0.B As above, customizable</p> <p>20532.S.B No symbol, for rocker push buttons 20532.S0.B As above, customizable</p> <p>20532.20.B ON/OFF symbol for rocker push buttons</p>	 <p>20532.N No symbol, for simple push buttons 20532.0.N As above, customizable</p> <p>20532.S.N No symbol, for rocker push buttons 20532.S0.N As above, customizable</p> <p>20532.20.N ON/OFF symbol for rocker push buttons</p>
 <p>20532.21 Arrows symbol, for rocker push buttons</p> <p>20532.1T 1 name-plate, for simple push buttons</p> <p>20532.25 Universal regulation symbols, for rocker push buttons</p>	 <p>20532.21.B Arrows symbol, for rocker push buttons</p> <p>20532.1T.B 1 name-plate, for simple push buttons</p> <p>20532.25.B Universal regulation symbols, for rocker push buttons</p>	 <p>20532.21.N Arrows symbol, for rocker push buttons</p> <p>20532.1T.N 1 name-plate, for simple push buttons</p> <p>20532.25.N Universal regulation symbols, for rocker push buttons</p>

By-me: automation - Interfaces

 <p>01475 3 programmable digital inputs module for contacts without potential, 3 LED control outputs, By-me home automation, for flush mounting (backside)</p>	 <p>01476 2 programmable digital inputs module for contacts without potential, 1 relay output for roller blind laths positioning, relay for cosφ 0.6 2 A 120-230 V~ motor, 2 LED control outputs, By-me home automation, for flush mounting (backside)</p>	 <p>01477 2 programmable digital inputs module for contacts without potential, 1 NO 10 A 120-230 V~ 50/60 Hz light control relay output, 2 LED control outputs, By-me home automation, for flush mounting (backside)</p>
--	---	--

Home automation

Grey	White	Next
------	-------	------

By-me: automation - Devices for DIN rail (60715 TH35) installation



01470
Pre-program 9-input and 8-output module, NO 16 A 120-230 V~ 50/60 Hz relay outputs, light control, roller blind laths positioning and local control functions, 6 x 17,5 mm modules



01471
4 16 A 120-230 V~ change-over relay outputs actuator, programmable for light control, roller blind laths positioning, fan-coil and local control, 4 x 17,5 mm modules



01850.2
Actuator with 16 A 120-230 V~ change-over relay output + push button for manual operating, 2 x 17,5 mm modules



Δ 01852.2
Actuator for 2 roller blinds with lath positioning, 16 A 120-230 V~ change-over relay output, push buttons for manual operating, 4 x 17,5 mm modules



01856
Actuator 0-10 Vdc for ballast control, 120-230 V~ changeover relay output, 3 x 17,5 mm modules



Δ 01853.120
MASTER dimmer, 40-500 W/VA, 40-300 VA, 120 V~, 3 x 17,5 mm modules



Δ 01854.120
SLAVE dimmer, 40-500 W/VA, 40-300 VA, 120 V~, 3 x 17,5 mm modules



Δ 01857.120
MASTER dimmer, 40-400 VA, 120 V~, 4 x 17,5 mm modules



Δ 01858.120
SLAVE dimmer, 40-400 VA, 120 V~, 4 x 17,5 mm modules



***01861**
MASTER dimmer, 40-1000 W/VA, 230 V~, MOSFET+TRIAC, 4 x 17,5 mm modules



Δ*01862
SLAVE dimmer, 40-1000 W/VA, 230 V~, MOSFET+TRIAC, 4 x 17,5 mm modules



01863
MASTER dimmer, 40-800 W/VA 50 Hz, 40-700 W/VA 60 Hz, 230 V~, MOSFET+TRIAC, 4 x 17,5 mm modules



Δ 01864
SLAVE dimmer, 40-800 W/VA 50 Hz, 40-700 W/VA 60 Hz, 230 V~, MOSFET+TRIAC, 4 x 17,5 mm modules



***01865**
MASTER dimmer, 40-700 VA, 230 V~ 50/60 Hz, MOSFET, 4 x 17,5 mm modules



Δ*01866
SLAVE dimmer, 40-700 VA, 230 V~ 50/60 Hz, MOSFET, 4 x 17,5 mm modules



01867
MASTER dimmer, 40-500 VA 50 Hz, 40-400 VA 60 Hz, 230 V~, MOSFET, 4 x 17,5 mm modules



Δ 01868
SLAVE dimmer, 40-500 VA 50 Hz, 40-400 VA 60 Hz, 230 V~, MOSFET, 4 x 17,5 mm modules



01870
MASTER dimmer, 40-500 W, 40-300 VA, CFL 10-200 W, LED 3-200 W, 230 V~, 4 x 17,5 mm modules

01870.120
As above, 120 V~



01871
SLAVE dimmer, 40-500 W, 40-300 VA, CFL 10-200 W, LED 3-200 W, 230 V~, 4 x 17,5 mm modules

01871.120
As above, 120 V~



01975
Actuator with 1-10 Vdc 30 mA output for LED control, 120-230 V~ 2,5 A change-over relay output, 120-230 V~ 50/60 Hz, 3 x 17,5 mm modules



01976
Actuator with 1-10 Vdc 30 mA output for LED control, 12-24 V 10 A relay output, 12-24 V~ 50/60 Hz or 12-24 Vdc, 3 x 17,5 mm modules



01466
Actuator with 4 (0)4-20 mA or 0-10 V proportional analogue outputs with max scalable voltage output, 120-230 V~ 50/60 Hz, 4 x 17,5 mm modules



01467
Device with 3 analogue signal inputs, 1 0-10 V or 4-20 mA input, 1 NTC sensor input, 1 brightness sensor 01530 input, 2 x 17,5 mm modules

By-me: automation - Electronic supply units



01874
230 V~ 50 Hz, for controllable LED lamps, 12-24 Vdc

01874.120
As above, 120 V~



01875
230 V~ 50 Hz, for controllable LED lamps, 350/500/700 mA

01875.120
As above, 120 V~



01876
230 V~ 50 Hz, for controllable LED RGB lamps, 12-24 Vdc

01876.120
As above, 120 V~



01877
230 V~ 50 Hz, for controllable LED RGB lamps, 12-24 Vdc

01877.120
As above, 120 V~

Home automation

Grey	White	Next
------	-------	------

By-me: automation - Electronic transformers (230-240 V~ 50/60 Hz)



Δ 01860.60
20-60 W,
12 V~ (SELV) output



01860.105
20-105 W,
12 V~ (SELV) output

By-me: automation - Devices



20515
Interface for traditional switches 230 V~/12-24 Vac/dc - 2 modules.
Depth: 37 mm



20518
Interface for traditional controls.
Depth: 40 mm



20515.B
Interface for traditional switches 230 V~/12-24 Vac/dc - 2 modules.
Depth: 37 mm



20518.B
Interface for traditional controls.
Depth: 40 mm



20515.N
Interface for traditional switches 230 V~/12-24 Vac/dc - 2 modules.
Depth: 37 mm



20518.N
Interface for traditional controls.
Depth: 40 mm



20516
Remote control receiver - 2 modules.
Depth: 26,5 mm



20516.B
Remote control receiver - 2 modules.
Depth: 26,5 mm



20516.N
Remote control receiver - 2 modules.
Depth: 26,5 mm



01849
IR remote control, 14-channel



20486
Orientable IR presence detector - 2 modules.
Depth: 26,5 mm



20485
IR presence detector - 2 modules.
Depth: 26,5 mm



Δ 20487
IR and microwaves presence detector - 2 modules.
Depth: 26,5 mm



20486.B
Orientable IR presence detector - 2 modules.
Depth: 26,5 mm



20485.B
IR presence detector - 2 modules.
Depth: 26,5 mm



20486.N
Orientable IR presence detector - 2 modules.
Depth: 26,5 mm



20485.N
IR presence detector - 2 modules.
Depth: 26,5 mm



Δ 20487.N
IR and microwaves presence detector - 2 modules.
Depth: 26,5 mm



00802.14
Orientable support - 2 modules



00805.14
Adaptor for orientable support flush mounting - 2 modules.
Depth: 36,5 mm



00800.14
Frame for orientable support surface mounting



00802
Orientable support - 2 modules



00805
Adaptor for orientable support flush mounting - 2 modules.
Depth: 36,5 mm



00800
Frame for orientable support surface mounting



00802.20
Orientable support - 2 modules



00805.20
Adaptor for orientable support flush mounting - 2 modules.
Depth: 36,5 mm



00800.20
Frame for orientable support surface mounting

Home automation

Grey	White	Next
------	-------	------

By-me: automation - Devices




20534
Actuator 6 A
120-230 V~
change-over
relay output.
Depth: 40 mm

20535
Actuator 16 A
120-230 V~
change-over relay
output - 2 modules.
Depth: 37 mm



20534.B
Actuator 6 A
120-230 V~
change-over
relay output.
Depth: 40 mm

20535.B
Actuator 16 A
120-230 V~
change-over relay
output - 2 modules.
Depth: 37 mm



20534.N
Actuator 6 A
120-230 V~
change-over
relay output.
Depth: 40 mm

20535.N
Actuator 16 A
120-230 V~
change-over relay
output - 2 modules.
Depth: 37 mm



20584.1
Interface for By-me
devices and IR receiver,
with 3 m of cable.
Depth: 41 mm




20584.1.B
Interface for By-me
devices and IR receiver,
with 3 m of cable.
Depth: 41 mm




20584.1.N
Interface for By-me
devices and IR receiver,
with 3 m of cable.
Depth: 41 mm

By-me: radiofrequency home automation - EnOcean® technology (868 MHz)



20505
2 flat rocker buttons with EnOcean®
wireless connection, no battery, to
complete with 20506 - 2 modules



▲01796.1
EnOcean® multifunction actuator,
NO 8 A 230 V~ relay output,
supply voltage 230 V~ 50/60 Hz



▲01796
Actuator with EnOcean® module,
relay output, supply voltage
230 V~ 50 Hz



20507
Frame for surface mounting
of 20505, grey




20507.B
Frame for surface mounting
of 20505, white



21507
Frame for surface mounting of 20505,
only for Eikon Evo cover plate, grey




21507.B
Frame for surface mounting of 20505,
only for Eikon Evo cover plate, white




20506
Pair of buttons
for 20505 device,
customizable

20508
Bus-RF interface
- 2 modules



20506.B
Pair of buttons
for 20505 device,
customizable

20508.B
Bus-RF interface
- 2 modules



20506.N
Pair of buttons
for 20505 device,
customizable

20508.N
Bus-RF interface
- 2 modules

Home automation

Grey	White	Next
------	-------	------

By-me: safety and security - Emergency lighting devices



02661
With high-efficiency LED, 230 V- 50/60 Hz, rechargeable Ni-Cd battery and built-in 6/7-module frame. Depth: 44,7 mm

Δ **02661.120**
As above, 120 V-



01846
Emergency lighting management interface through Bus By-me



00913
Ni-Cd 4,8 V 800 mAh spare rechargeable battery for 02661

By-me: sound system - Devices



20583
Spring connector for speaker.
Depth: 19,4 mm



20582
Audio input with 2 RCA connectors, automatic volume adjustment, incorporated line terminator - 2 modules.
Depth: 37 mm



20583.B
Spring connector for speaker.
Depth: 19,4 mm



20582.B
Audio input with 2 RCA connectors, automatic volume adjustment, incorporated line terminator - 2 modules.
Depth: 37 mm



20583.N
Spring connector for speaker.
Depth: 19,4 mm



20582.N
Audio input with 2 RCA connectors, automatic volume adjustment, incorporated line terminator - 2 modules.
Depth: 37 mm



20584.1
Interface for By-me devices and IR receiver, with 3 m of cable.
Depth: 41 mm



20584.1.B
Interface for By-me devices and IR receiver, with 3 m of cable.
Depth: 41 mm



20584.1.N
Interface for By-me devices and IR receiver, with 3 m of cable.
Depth: 41 mm



Δ **20585**
Docking station for iPod/iPhone device and supply unit - 2 + 2 modules.
Depth: 37 mm




Δ **20585.B**
Docking station for iPod/iPhone device and supply unit - 2 + 2 modules.
Depth: 37 mm




Δ **20585.N**
Docking station for iPod/iPhone device and supply unit - 2 + 2 modules.
Depth: 37 mm



20586
Microphone for selective or general call, voice activation function for monitoring children - 2 modules. Depth: 37 mm



20586.B
Microphone for selective or general call, voice activation function for monitoring children - 2 modules. Depth: 37 mm



20586.N
Microphone for selective or general call, voice activation function for monitoring children - 2 modules. Depth: 37 mm



20581
2 rocker push buttons and 8 Ω 1+1 W amplifier, integrated line terminator, to complete with interchangeable buttons - 2 modules. Depth: 37 mm

Home automation

Grey	White	Next
------	-------	------

By-me: sound system - 1-module interchangeable buttons



20531.23
Function/track
change symbols,
for rocker push
buttons



20531.24
O | and volume
adjustment symbols,
for rocker push
buttons



20531.23.B
Function/track
change symbols,
for rocker push
buttons



20531.24.B
O | and volume
adjustment symbols,
for rocker push
buttons



20531.23.N
Function/track
change symbols,
for rocker push
buttons



20531.24.N
O | and volume
adjustment symbols,
for rocker push
buttons

By-me: sound system - Speakers



21588
Passive speaker, 8 Ω 10 W, with
built-in 8-module mounting frame.
Depth: 48 mm




21588.B
Passive speaker, 8 Ω 10 W, with
built-in 8-module mounting frame.
Depth: 48 mm



21588.N
Passive speaker, 8 Ω 10 W, with
built-in 8-module mounting frame.
Depth: 48 mm



20587
Passive speaker, 8 Ω 3 W
- 3 modules.
Depth: 40 mm



20587.B
Passive speaker, 8 Ω 3 W
- 3 modules.
Depth: 40 mm



20587.N
Passive speaker, 8 Ω 3 W
- 3 modules.
Depth: 40 mm



01906
IP55 passive speaker, 8 Ω 30 W,
for hollow walls and false ceiling
installation



01907
Passive speaker, 8 Ω 30 W,
for hollow walls and false
ceiling installation



01908
Passive speaker, 8 Ω
30 W, orientable, for
surface mounting

By-me: sound system - Retrofit devices



01903
Branch shunt for By-me
devices, flush mounting
(retrofit)



01904
Branch shunt for sound
system devices, flush
mounting (retrofit)

Grey	White	Next
------	-------	------

By-me: sound system - Devices for DIN rail (60715 TH35) installation



01900
FM radio tuner with RDS, coaxial connector for external FM antenna, built-in line terminator, 2 x 17,5 mm modules



01901
Stereo amplifier, 2 outputs for sound diffusers 8 Ω 10+10 W, power supply 110-230 V~ 50/60 Hz, built-in line terminator, 6 x 17,5 mm modules



01902
Bus line/sound diffusion decoupler for By-me power supply, built-in line terminator, 2 x 17,5 mm modules



01400
Supply unit, 29 Vdc 400 mA output, 230 V~ 50/60 Hz, 2 x 17,5 mm modules



01401
Supply unit, 29 Vdc 1280 mA output, 120-230 V~ 50/60 Hz, 8 x 17,5 mm modules

By-me: sound system - Accessories and cables



01840.B
Cable for sound system, halogen-free 2x0,50 mm², rated operating voltage to earth 400 V, suitable for I category cables, blue - 100 m



01839
Removable 2 screw terminals, for Bus system

Accessories

LED signalling units



00935.A: 12-24 V~ 0,1 W, amber
00935.G: 12-24 V~ 0,1 W, green
00935.R: 12-24 V~ 0,1 W, red
00935.B: 12-24 V~ 0,1 W, blue
00935.W: 12-24 V~ 0,1 W, white

▲ 00936.250.A: 250 V~ 50/60 Hz 0,35 W, amber
▲ 00936.250.G: 250 V~ 50/60 Hz 0,35 W, green
▲ 00936.250.R: 250 V~ 50/60 Hz 0,35 W, red
▲ 00936.250.B: 250 V~ 50/60 Hz 0,35 W, blue
▲ 00936.250.W: 250 V~ 50/60 Hz 0,35 W, white

▲ 00936.120.A: 120 V~ 50/60 Hz 0,2 W, amber
▲ 00936.120.G: 120 V~ 50/60 Hz 0,2 W, green
▲ 00936.120.R: 120 V~ 50/60 Hz 0,2 W, red
▲ 00936.120.B: 120 V~ 50/60 Hz 0,2 W, blue
▲ 00936.120.W: 120 V~ 50/60 Hz 0,2 W, white

▲ 00936.A: 110-250 V~ 0,5 W, amber
▲ 00936.G: 110-250 V~ 0,5 W, green
▲ 00936.R: 110-250 V~ 0,5 W, red
▲ 00936.B: 110-250 V~ 0,5 W, blue
▲ 00936.W: 110-250 V~ 0,5 W, white

LED signalling units for axial switches



00937.A: 12-24 V~ 0,1 W, amber
00937.G: 12-24 V~ 0,1 W, green
00937.R: 12-24 V~ 0,1 W, red
00937.B: 12-24 V~ 0,1 W, blue
00937.W: 12-24 V~ 0,1 W, white

00938.A: 110-250 V~ 0,3 W, amber
00938.G: 110-250 V~ 0,3 W, green
00938.R: 110-250 V~ 0,3 W, red
00938.B: 110-250 V~ 0,3 W, blue
00938.W: 110-250 V~ 0,3 W, white

Pre-wired signalling units



00930
 250 V~ 0,3 W, red
 suitable for British
 standard socket outlets



00931
 110-250 V~ 0,5 W, amber

E10 10x28 mm lamps



Neon:
▲ 14778
 110 V~ 0,5 W, red¹
14779
 230 V~ 0,5 W, red¹



Incandescent:
▲ 14770
 12 V~ 3 W, white¹
14771
 24 V~ 3 W, white¹
▲ 14774
 12 V~ 0,6 W, white¹
▲ 14775
 24 V~ 1,2 W, white¹
▲ 14776
 130 V~ 2,6 W, white¹
14777
 230 V~ 3 W, white¹

Transparent cover for mounting frames



21602.C
 For 2-module frame,
 71 mm fixing centres



21613.C
 For 3-module frame



21614.C
 For 4-module frame



21618.C
 For 8 (4+4)-module frame



21617.C
 For 7-module frame

Adaptors for DIN rail (60715 TH35) installation



V51921
 1-module support



V51922
 2-module support



V51923
 3-module support

¹ The indicated colour is that of emitted light

Grey	White	Next
------	-------	------

Supervising - Control



21553.2
10" IP multimedia video touch screen for Due Fili Plus video door system and By-me system supervising by web server



21848.1
Color touch screen, 4,3", Full Flat, for the control, 1 temperature sensor input, with built-in mounting frame for installation in 8-module mounting box. Depth: 50,4 mm



21848.1.B
Color touch screen, 4,3", Full Flat, for the control, 1 temperature sensor input, with built-in mounting frame for installation in 8-module mounting box. Depth: 50,4 mm



21848.1.BN
Color touch screen, 4,3", Full Flat, for the control, 1 temperature sensor input, with built-in mounting frame for installation in 8-module mounting box. Depth: 50,4 mm



21849.1
Full Flat touch screen, for the room control, 1 temperature sensor input - 3 modules. Depth: 37 mm



21849.1.B
Full Flat touch screen, for the room control, 1 temperature sensor input - 3 modules. Depth: 37 mm



21849.1.BN
Full Flat touch screen, for the room control, 1 temperature sensor input - 3 modules. Depth: 37 mm



Δ 20849
Monochrome touch screen, for the room control - 3 modules. Depth: 37 mm



Δ 20849.B
Monochrome touch screen, for the room control - 3 modules. Depth: 37 mm



Δ 20849.N
Monochrome touch screen, for the room control - 3 modules. Depth: 37 mm

Supervising - Devices for DIN rail (60715 TH35) installation



01545
Web server for local and remote control of the KNX system, 8 x 17,5 mm modules

Grey	White	Next
------	-------	------

Automation - Control device



21840
4 independently programmable buttons for single controls or scenes, KNX standard, for Eikon Tactil - 2 modules. Depth: 38 mm



21860
6 independently programmable buttons for single controls or scenes, KNX standard, for Eikon Tactil - 3 modules. Depth: 38 mm



20840
Control device with four independent push buttons, KNX standard, visible in darkness, to be completed with half-buttons - 2 modules. Depth: 20 mm

Automation - 1-module interchangeable half-buttons



20841
Four half-buttons without symbol



20841.0
Four half-buttons, O symbol



20841.1
Four half-buttons, I symbol



20841.B
Four half-buttons without symbol



20841.0.B
Four half-buttons, O symbol



20841.1.B
Four half-buttons, I symbol



20841.N
Four half-buttons without symbol



20841.0.N
Four half-buttons, O symbol




20841.1.N
Four half-buttons, I symbol



20841.2
Four half-buttons, I O symbol



20841.3
Four half-buttons, directional arrows symbol



20841.4
Four half-buttons, regulation symbol



20841.2.B
Four half-buttons, I O symbol



20841.3.B
Four half-buttons, directional arrows symbol



20841.4.B
Four half-buttons, regulation symbol



20841.2.N
Four half-buttons, I O symbol



20841.3.N
Four half-buttons, directional arrows symbol



20841.4.N
Four half-buttons, regulation symbol



20843
Four fixed half-buttons, without symbol



20843.B
Four fixed half-buttons, without symbol



20843.N
Four fixed half-buttons, without symbol

Grey	White	Next
------	-------	------

Automation - 2-module interchangeable half-buttons



20842 Two half-buttons without symbol
20842.0 Two half-buttons, O symbol
20842.1 Two half-buttons, I symbol



20842.B Two half-buttons without symbol
20842.0.B Two half-buttons, O symbol
20842.1.B Two half-buttons, I symbol



20842.N Two half-buttons without symbol
20842.0.N Two half-buttons, O symbol
20842.1.N Two half-buttons, I symbol



20842.2 Two half-buttons, IO symbol
20842.3 Two half-buttons, directional arrows symbol
20842.4 Two half-buttons, regulation symbol



20842.2.B Two half-buttons, IO symbol
20842.3.B Two half-buttons, directional arrows symbol
20842.4.B Two half-buttons, regulation symbol



20842.2.N Two half-buttons, IO symbol
20842.3.N Two half-buttons, directional arrows symbol
20842.4.N Two half-buttons, regulation symbol



20844 Two fixed half-buttons, without symbol



20844.B Two fixed half-buttons, without symbol



20844.N Two fixed half-buttons, without symbol

Automation - Control



20850 Passive infrared presence detector, KNX standard - 2 modules. Depth: 26,5 mm
00802.14 Orientable support - 2 modules



20850.B Passive infrared presence detector, KNX standard - 2 modules. Depth: 26,5 mm
00802 Orientable support - 2 modules



20850.N Passive infrared presence detector, KNX standard - 2 modules. Depth: 26,5 mm
00802.20 Orientable support - 2 modules



00805.14 Adaptor for orientable support flush mounting - 2 modules. Depth: 36,5 mm
00800.14 Frame for orientable support surface mounting




00805 Adaptor for orientable support flush mounting - 2 modules. Depth: 36,5 mm
00800 Frame for orientable support surface mounting



00805.20 Adaptor for orientable support flush mounting - 2 modules. Depth: 36,5 mm
00800.20 Frame for orientable support surface mounting

Grey	White	Next
------	-------	------

Access control - Eikon Tactil



21457
Eikon Tactil touch transponder card reader, KNX standard, 2 relay outputs NO 4 A 24 V~, 2 inputs, 12-24V~ 50/60 Hz and 12-24 Vdc (SELV) - 3 modules. Supplied without transponder card. Depth: 36,5 mm



21666.70
Electronic plate for 21457, white diamond - 3 modules



21666.71
Electronic plate for 21457, aqua - 3 modules



21666.73
Electronic plate for 21457, pearl grey - 3 modules



21666.76
Electronic plate for 21457, black diamond - 3 modules

Access control - Device



20457
Transponder card reader for installation outside rooms, KNX standard, 2 NO 4 A 24 V~ relay outputs, 2 inputs, power supply 12-24 V~ 50/60 Hz and 12-24 Vdc (SELV) - 3 modules. Supplied without transponder card. Depth: 37 mm



20453
Transponder card reader with vertical pocket for installation inside rooms, KNX standard, 2 NO 4 A 24 V~ relay outputs, 2 inputs, power supply 12-24 V~ 50/60 Hz and 12-24 Vdc (SELV) - 3 modules. Depth: 37 mm



20457.B
Transponder card reader for installation outside rooms, KNX standard, 2 NO 4 A 24 V~ relay outputs, 2 inputs, power supply 12-24 V~ 50/60 Hz and 12-24 Vdc (SELV) - 3 modules. Supplied without transponder card. Depth: 37 mm



20453.B
Transponder card reader with vertical pocket for installation inside rooms, KNX standard, 2 NO 4 A 24 V~ relay outputs, 2 inputs, power supply 12-24 V~ 50/60 Hz and 12-24 Vdc (SELV) - 3 modules. Depth: 37 mm



20457.N
Transponder card reader for installation outside rooms, KNX standard, 2 NO 4 A 24 V~ relay outputs, 2 inputs, power supply 12-24 V~ 50/60 Hz and 12-24 Vdc (SELV) - 3 modules. Supplied without transponder card. Depth: 37 mm



20453.N
Transponder card reader with vertical pocket for installation inside rooms, KNX standard, 2 NO 4 A 24 V~ relay outputs, 2 inputs, power supply 12-24 V~ 50/60 Hz and 12-24 Vdc (SELV) - 3 modules. Depth: 37 mm



20450
Transponder card reader/programmer, in 4-module table mounting box. To complete with 4-module cover plate



20450.B
Transponder card reader/programmer, in 4-module table mounting box. To complete with 4-module cover plate



20450.N
Transponder card reader/programmer, in 4-module table mounting box. To complete with 4-module cover plate



01598
Programmable and customizable transponder card



01835.H
Programmable and customizable transponder card

Grey	White	Next
------	-------	------

Temperature control (heating and air-conditioning)



02952

Touch screen thermostat for ambient temperature control of 2 independent zones, KNX standard, NO 4 A 24 V~ relay output + 1 temperature sensor (20432 or 02965.1) input + 1 programmable digital input - 2 modules. Depth: 37 mm



02952.B

Touch screen thermostat for ambient temperature control of 2 independent zones, KNX standard, NO 4 A 24 V~ relay output + 1 temperature sensor (20432 or 02965.1) input + 1 programmable digital input - 2 modules. Depth: 37 mm



02952.BN

Touch screen thermostat for ambient temperature control of 2 independent zones, KNX standard, NO 4 A 24 V~ relay output + 1 temperature sensor (20432 or 02965.1) input + 1 programmable digital input - 2 modules. Depth: 37 mm



20432

Electronic temperature sensor. Depth: 24,4 mm



20432.B

Electronic temperature sensor. Depth: 24,4 mm



20432.N

Electronic temperature sensor. Depth: 24,4 mm

Temperature control - Linear temperature sensor



02965.1

Wired temperature sensor, NTC 10 kΩ, cable length 3 m



01546

Weather station, KNX standard, power supply 12-32 Vdc or 12-24 Vac

Brightness and presence sensors



▲ 01527

IR presence detector, 360° motion range, ON/OFF and adjustment of lighting, heating, air conditioning, ventilation, 1-1000 Lux adjustable brightness range, KNX standard, for ceiling installation. Dimensions: 80x80x45 mm



▲ 01527.S

Adapter for 01527 detector ceiling installation



▲ 01529.1

IR presence detector, 360° motion range, for ON/OFF lighting, 1-1000 Lux adjustable brightness range, KNX standard, for ceiling installation. Dimensions: 91x91x45 mm



▲ 01529.1.S

Adapter for 01529.1 detector ceiling installation



▲ 01529

IR presence detector, 360° motion range, for lightings depending on the brightness, 0-1000 Lux adjustable brightness range, KNX standard, for ceiling installation



▲ 01529.S

Adapter for 01529 detector ceiling installation



01530

Light sensor for dimmer 01528, KNX standard, ceiling installation

Building automation: Well-contact Plus

Devices for DIN rail (60715 TH35) installation




01510
4-channel digital input device, programmable for NO, NC and 120-230 V~ contacts, KNX standard, 2 x 17,5 mm modules



01522
Input/output device, 4 NO 16 A 250 V~ relay outputs, 4 inputs for NO contacts, KNX standard, 4 x 17,5 mm modules



01523
Actuator with 4 NO 16 A 250 V~ relay outputs, KNX standard, 4 x 17,5 mm modules



01521
Actuator with 12 10 A 250 V~ 50/60 Hz relay outputs for fluorescent lamps, KNX standard, 12 x 17,5 mm modules



01524
Actuator for 2 roller shutters, 16 A 250 V~ relay outputs, KNX standard, 4 x 17,5 mm modules



01525
Actuator for 8 roller shutters, 6 A 230 V~ 50/60 Hz relay outputs, KNX standard, 8 x 17,5 mm modules



01535
Solenoid valve actuator, 6 230 V~ 0,5 A outputs, local control buttons, KNX standard, 4x17,5 mm modules



01536
Actuator, 4 0-10 V or (0)4-20 mA analog-outputs, KNX standard, 4x17,5 mm modules



01526
Dimmer 230 V~ 50/60 Hz for 2x300 W incandescent lamps, 2x300 VA ferromagnetic transformers, 2x300 VA electronic transformers, KNX standard, 4 x 17,5 mm modules



01528
Dimmer, 2 inputs for 01530, 2 NO 16 A 250 V~ relay outputs, 2 1-10 V outputs, KNX standard, 4 x 17,5 mm modules



01547.1
IP interface, KNX, 2 x 17,5 mm modules



01547
IP interface, KNX, 2 x 17,5 mm modules



01544
KNX DALI gateway, 8-channel for 16 lamps per channel, 6 x 17,5 mm modules



01540
USB interface, KNX B-type, 2 x 17,5 mm modules



01500.2
Power supply with Bus 30 Vdc 320 mA output, supply voltage 120-240 V~ 50/60 Hz, with decoupling coil, KNX standard, 4 x 17,5 mm modules



01500.1
Power supply with Bus 30 Vdc 320 mA output, supply voltage 85-265 V~ 50/60 Hz, with decoupling coil, KNX standard, 4 x 17,5 mm modules



01501.2
Power supply with Bus 30 Vdc 640 mA output, 30 Vdc auxiliary output, supply voltage 120-240 V~ 50/60 Hz, with decoupling coil, KNX standard, 4 x 17,5 mm modules



01501.1
Power supply with Bus 30 Vdc 640 mA output, 30 Vdc auxiliary output, supply voltage 230 V~ 50/60 Hz, with decoupling coil, KNX standard, 4 x 17,5 mm modules



01504.2
Line coupler, KNX standard, 2 x 17,5 mm modules



01504.1
Line coupler, KNX standard, 2 x 17,5 mm modules



16887
Safety transformer, 230/12-24 V~ (SELV), 24 VA, 3 x 17,5 mm modules



01514
Interface with 2 input or output programmable channels for LEDs, KNX standard



01515
Interface with 4 input or output programmable channels for LEDs, KNX standard

Software and interface



Software for Well-contact Plus system management

- 01589:** Well-contact Suite Light
- 01590:** Well-contact Suite Basic
- 01591:** Well-contact Suite Top
- 01592:** Well-contact Suite Client
- 01593:** Well-contact Suite Office
- 01594:** Well-contact Suite Client Office

01595
Additional software for interfacing with existing management system



01597
USB spare key for Well-contact Suite software



01993
Hardware interface for By-me and Well-contact Plus touch screens + By-me system programming by Bus with RJ11 socket. It is necessary EasyTool Professional and touch screen configuration software

KNX cable



01890
2x2x0,8 mm cable, KNX standard

EIKON TACTIL - Cover plates

Luminosi (Bevelled crystal)



70 White diamond



71 Aqua



76 Black Diamond

EIKON EVO - Cover plates

Primari (Anodized aluminium)



01 Brilliant Aluminium



02 Next Grey



03 Lava Grey

Esclusivi (Refined aluminium)



06 Black Sapphire



▲ 07.01 Silver



08 Titanium

Scolpiti (Carved stone)



51 Carrara white



52 Natural split slate



53 Grey quartzite

EIKON TACTIL - Cover plates



73 Pearl grey

Eikon Tactil:
power simulation



EIKON EVO - Cover plates



04 Neutral Bronze



05 Dark Bronze



09 Polished gold



10 Satin gold



▲ G09 Total polished gold



▲ G10 Total satin gold

EIKON EVO - Cover plates

Naturali

(Solid wood)



31 Italian walnut



32 White Oak




33 Wengé

Luminosi

(Bevelled crystal)



70 White diamond



71 Aqua



72 Silver ice

Raffinati

(Natural leather)



21 Cream



22 Tobacco

Speciali

(Corian®)



41 Glacier ice

Essenziali

(Total aluminium and crystal)



17 Total white



18 Total black



87 Total white diamond

EIKON EVO - Cover plates



73 Pearl grey



74 Opal brown



75 Bronze mirror



76 Black diamond



88 Total black diamond

EIKON CHROME - Classic cover plates

Bright

(Varnished metal)



C01 Arctic white



C02 Antique white



C07 Metallic champagne



C08 Metallic titanium



C10 Metallic silver



C11 Metallic Siena



C12 Metallic anthracite



C13 Matt silver



C14 Matt titanium



C15 Matt anthracite

Refined

(Refined metal)



G21 Satin gold



C22 Satin nickel



G24 Polished gold

Inox

(Stainless steel)



C91 Brushed inox

Wood

(Solid wood)



C31 African wengé



C32 White oak



C35 Italian walnut

Glass

(Crystal)



C71 Black ice



C72 White ice



C81 Silver mirror

Note: changes in the grain, colour or evenness of the surface of cover plates made of solid wood and crystal are a prized feature and a guarantee of the material's authenticity.

EIKON CHROME - Round cover plates

Bright

(Varnished metal)



C01 Arctic white



C02 Antique white



C07 Metallic champagne



C08 Metallic titanium



C09 Metallic Atlantic grey



C10 Metallic silver



C12 Metallic anthracite



C13 Matt silver



C14 Matt titanium



C15 Matt anthracite

Refined

(Refined metal)



G21 Satin gold



C22 Satin nickel



C23 Satin chrome



G24 Polished gold

Inox

(Stainless steel)



C91 Brushed inox

Wood

(Solid wood)



C32 White oak



C35 Italian walnut



C36 American cherrywood

EIKON TOTAL LOOK - Classic cover plates

Bright

(Varnished metal)



B01 Arctic white



N13 Matt silver



15 Matt anthracite

EIKON TOTAL LOOK - Round cover plates

Bright (Varnished metal)



B01 Arctic white










































N13 Matt silver







15 Matt anthracite






























Eikon Tactil and Eikon Evo cover plates: guideline

		2-module		3-module		4-module		7-module
		Eikon Tactil	Eikon Evo	Eikon Tactil	Eikon Evo	Eikon Tactil	Eikon Evo	Eikon Evo
								
Primari (Anodized aluminium)								
	Brilliant Aluminium	-	21642.01	-	21653.01	-	21654.01	21657.01
	Next Grey	-	21642.02	-	21653.02	-	21654.02	21657.02
	Lava Grey	-	21642.03	-	21653.03	-	21654.03	21657.03
	Neutral Bronze	-	21642.04	-	21653.04	-	21654.04	21657.04
	Dark Bronze	-	21642.05	-	21653.05	-	21654.05	21657.05
Esclusivi (Refined aluminium)								
	Black Sapphire	-	21642.06	-	21653.06	-	21654.06	21657.06
	Silver	-	▲21642.07.01	-	▲21653.07.01	-	▲21654.07.01	▲21657.07.01
	Titanium	-	21642.08	-	21653.08	-	21654.08	21657.08
	Polished gold	-	21642.09	-	21653.09	-	21654.09	21657.09
	Total polished gold (with gold frame)	-	▲21642.G09	-	▲21653.G09	-	▲21654.G09	▲21657.G09
	Satin gold	-	21642.10	-	21653.10	-	21654.10	21657.10
	Total satin gold (with gold frame)	-	▲21642.G10	-	▲21653.G10	-	▲21654.G10	▲21657.G10
Scolpiti (Carved stone)								
	Carrara white	-	21642.51	-	21653.51	-	21654.51	21657.51
	Natural split slate	-	21642.52	-	21653.52	-	21654.52	21657.52
	Grey quartzite	-	21642.53	-	21653.53	-	21654.53	21657.53
Naturali (Solid wood)								
	Italian walnut	-	21642.31	-	21653.31	-	21654.31	21657.31
	White Oak	-	21642.32	-	21653.32	-	21654.32	21657.32
	Wengé	-	21642.33	-	21653.33	-	21654.33	21657.33
Luminosi (Bevelled crystal)								
	White diamond	21662.70	21642.70	21663.70	21653.70	21664.70	21654.70	21657.70
	Aqua	21662.71	21642.71	21663.71	21653.71	21664.71	21654.71	21657.71
	Silver ice	-	21642.72	-	21653.72	-	21654.72	21657.72
	Pearl grey	21662.73	21642.73	21663.73	21653.73	21664.73	21654.73	21657.73
	Opal brown	-	21642.74	-	21653.74	-	21654.74	21657.74
	Bronze mirror	-	21642.75	-	21653.75	-	21654.75	21657.75
	Black Diamond	21662.76	21642.76	21663.76	21653.76	21664.76	21654.76	21657.76
Raffinati (Natural leather)								
	Cream	-	21642.21	-	21653.21	-	21654.21	21657.21
	Tobacco	-	21642.22	-	21653.22	-	21654.22	21657.22
Speciali (Corian®)								
	Glacier ice	-	21642.41	-	21653.41	-	21654.41	21657.41
Essenziali (Total aluminium and crystal)								
	Total White	-	21642.17	-	21653.17	-	21654.17	21657.17
	Total Black	-	21642.18	-	21653.18	-	21654.18	21657.18
	Total White Diamond	-	21642.87	-	21653.87	-	21654.87	21657.87
	Total Black Diamond	-	21642.88	-	21653.88	-	21654.88	21657.88




Eikon Tactil and Eikon Evo cover plates: guideline

8-module Eikon Evo	2+2-module (between centres 71 mm) Eikon Evo	2+2+2-module (between centres 71 mm) Eikon Evo	2+2+2+2-module (between centres 71 mm) Eikon Evo
			
21668.01	21643.01	21644.01	21669.01
21668.02	21643.02	21644.02	21669.02
21668.03	21643.03	21644.03	21669.03
21668.04	21643.04	21644.04	21669.04
21668.05	21643.05	21644.05	21669.05
21668.06	21643.06	21644.06	21669.06
▲21668.07.01	▲21643.07.01	▲21644.07.01	▲21669.07.01
21668.08	21643.08	21644.08	21669.08
21668.09	21643.09	21644.09	21669.09
▲21668.G09	▲21643.G09	▲21644.G09	▲21669.G09
21668.10	21643.10	21644.10	21669.10
▲21668.G10	▲21643.G10	▲21644.G10	▲21669.G10
21668.51	-	-	-
21668.52	-	-	-
21657.53	-	-	-
21668.31	-	-	-
21657.32	-	-	-
21668.33	-	-	-
21668.70	21643.70	21644.70	21669.70
21668.71	21643.71	21644.71	21669.71
21668.72	21643.72	21644.72	21669.72
21668.73	21643.73	21644.73	21669.73
21668.74	21643.74	21644.74	21669.74
21668.75	21643.75	21644.75	21669.75
21668.76	21643.76	21644.76	21669.76
21668.21	-	-	-
21668.22	-	-	-
21668.41	-	-	-
21668.17	21643.17	21644.17	21669.17
21668.18	21643.18	21644.18	21669.18
21668.87	21643.87	21644.87	21669.87
21668.88	21643.88	21644.88	21669.88















Eikon Chrome cover plates: guideline

















	2-module		2-central-module		3-module	
						
	Classic	Round	Classic	Round	Classic	Round
Bright (Varnished metal)						
 Artic white	20642.C01	20672.C01	20652.C01	20682.C01	20653.C01	20683.C01
 Antique white	20642.C02	20672.C02	20652.C02	20682.C02	20653.C02	20683.C02
 Metallic champagne	20642.C07	20672.C07	20652.C07	20682.C07	20653.C07	20683.C07
 Metallic titanium	20642.C08	20672.C08	20652.C08	20682.C08	20653.C08	20683.C08
 Metallic Atlantic grey	-	20672.C09	-	20682.C09	-	20683.C09
 Metallic silver	20642.C10	20672.C10	20652.C10	20682.C10	20653.C10	20683.C10
 Metallic Siena	20642.C11	-	20652.C11	-	20653.C11	-
 Metallic anthracite	20642.C12	20672.C12	20652.C12	20682.C12	20653.C12	20683.C12
 Matt silver	20642.C13	20672.C13	20652.C13	20682.C13	20653.C13	20683.C13
 Matt titanium	20642.C14	20672.C14	20652.C14	20682.C14	20653.C14	20683.C14
 Matt anthracite	20642.C15	20672.C15	20652.C15	20682.C15	20653.C15	20683.C15
Refined (Refined metal)						
 Satin gold (with gold frame)	20642.G21	20672.G21	20652.G21	20682.G21	20653.G21	20683.G21
 Satin nickel	20642.C22	20672.C22	20652.C22	20682.C22	20653.C22	20683.C22
 Satin chrome	-	20672.C23	-	20682.C23	-	20683.C23
 Polished gold (with gold frame)	20642.G24	20672.G24	20652.G24	20682.G24	20653.G24	20683.G24
Inox (Stainless steel)						
 Brushed inox	20642.C91	20672.C91	20652.C91	20682.C91	20653.C91	20683.C91
Wood (Solid wood)						
 African wengé	20642.C31	-	20652.C31	-	20653.C31	-
 White oak	20642.C32	20672.C32	20652.C32	20682.C32	20653.C32	20683.C32
 Italian walnut	20642.C35	20672.C35	20652.C35	20682.C35	20653.C35	20683.C35
 American cherrywood	-	20672.C36	-	20682.C36	-	20683.C36
Glass (Crystal)						
 Black ice	20642.C71	-	20652.C71	-	20653.C71	-
 White ice	20642.C72	-	20652.C72	-	20653.C72	-
 Silver mirror	20642.C81	-	20652.C81	-	20653.C81	-

Eikon Chrome cover plates: guideline

4-module		7-module		8-module	
					
Classic	Round	Classic	Round	Classic	Round
20654.C01	20684.C01	20657.C01	20687.C01	20668.C01	20698.C01
20654.C02	20684.C02	20657.C02	20687.C02	20668.C02	20698.C02
20654.C07	20684.C07	20657.C07	20687.C07	20668.C07	20698.C07
20654.C08	20684.C08	20657.C08	20687.C08	20668.C08	20698.C08
-	20684.C09	-	20687.C09	-	20698.C09
20654.C10	20684.C10	20657.C10	20687.C10	20668.C10	20698.C10
20654.C11	-	20657.C11	-	20668.C11	-
20654.C12	20684.C12	20657.C12	20687.C12	20668.C12	20698.C12
20654.C13	20684.C13	20657.C13	20687.C13	20668.C13	20698.C13
20654.C14	20684.C14	20657.C14	20687.C14	20668.C14	20698.C14
20654.C15	20684.C15	20657.C15	20687.C15	20668.C15	20698.C15
20654.G21	20684.G21	20657.G21	20687.G21	20668.G21	20698.G21
20654.C22	20684.C22	20657.C22	20687.C22	20668.C22	20698.C22
-	20684.C23	-	20687.C23	-	20698.C23
20654.G24	20684.G24	20657.G24	20687.G24	20668.G24	20698.G24
20654.C91	20684.C91	20657.C91	20687.C91	20668.C91	20698.C91
20654.C31	-	20657.C31	-	20668.C31	-
20654.C32	20684.C32	20657.C32	20687.C32	20668.C32	20698.C32
20654.C35	20684.C35	20657.C35	20687.C35	20668.C35	20698.C35
-	20684.C36	-	20687.C36	-	20698.C36
20654.C71	-	20657.C71	-	20668.C71	-
20654.C72	-	20657.C72	-	20668.C72	-
20654.C81	-	20657.C81	-	20668.C81	-
























Eikon Total Look cover plates: guideline

	2-module		2-central-module		3-module		4-module	
								
	Classic	Round	Classic	Round	Classic	Round	Classic	Round
Bright (Varnished metal)								
 Artic white	20642.B01	20672.B01	20652.B01	20682.B01	20653.B01	20683.B01	20654.B01	20684.B01
 Matt silver	20642.N13	20672.N13	20652.N13	20682.N13	20653.N13	20683.N13	20654.N13	20684.N13
 Matt anthracite	20642.15	20672.15	20652.15	20682.15	20653.15	20683.15	20654.15	20684.15
Reflex (Technopolymer)								
 Reflex graphite	20642.40	-	20652.40	-	20653.40	-	20654.40	-
 Reflex ice (with white frame)	20642.B41	-	20652.B41	-	20653.B41	-	20654.B41	-
 Reflex anthracite	▲20642.42	-	▲20652.42	-	▲20653.42	-	▲20654.42	-




















	7-module		8-module		14-module 21-module		Panel mounting 1-module		Panel mounting 2-module	
										
	Classic	Round	Classic	Round	Classic	Classic	Classic	Round	Classic	Round
Bright (Varnished metal)										
 Artic white	20657.B01	20687.B01	20668.B01	20698.B01	20660.01*	20661.01*	20666.B01	20696.B01	20667.B01	20697.B01
 Matt silver	20657.N13	20687.N13	20668.N13	20698.N13	20660.13*	20661.13*	20666.N13	20696.N13	20667.N13	20697.N13
 Matt anthracite	20657.15	20687.15	20668.15	20698.15	20660.15*	20661.15*	20666.15	20696.15	20667.15	20697.15
Reflex (Technopolymer)										
 Reflex graphite	20657.40	-	20668.40	-	-	-	-	-	-	-
 Reflex ice (with white frame)	20657.B41	-	20668.B41	-	-	-	-	-	-	-
 Reflex anthracite	▲20657.42	-	▲20668.42	-	-	-	-	-	-	-

* Technopolymer






























Eikon Tactil and Eikon Evo cover plates for British standard: guideline

	2-module		3-module/monobloc	5-module/monobloc	
	Eikon Tactil	Eikon Evo	Eikon Evo	Eikon Tactil	Eikon Evo
					
Primari (Anodized aluminium)					
 Brilliant Aluminium	-	21642.01	21648.01	-	21649.01
 Next Grey	-	21642.02	21648.02	-	21649.02
 Lava Grey	-	21642.03	21648.03	-	21649.03
 Neutral Bronze	-	21642.04	21648.04	-	21649.04
 Dark Bronze	-	21642.05	21648.05	-	21649.05
Esclusivi (Refined aluminium)					
 Black Sapphire	-	21642.06	21648.06	-	21649.06
 Silver	-	▲21642.07.01	▲21648.07.01	-	▲21649.07.01
 Titanium	-	21642.08	21648.08	-	21649.08
 Polished gold	-	21642.09	21648.09	-	21649.09
 Total polished gold (with gold frame)	-	▲21642.G09	▲21648.G09	-	▲21649.G09
 Satin gold	-	21642.10	21648.10	-	21649.10
 Total satin gold (with gold frame)	-	▲21642.G10	▲21648.G10	-	▲21649.G10
Scolpiti (Carved stone)					
 Carrara white	-	21642.51	21648.51	-	21649.51
 Natural split slate	-	21642.52	21648.52	-	21649.52
 Grey quartzite	-	21642.53	21648.53	-	21649.53
Naturali (Solid wood)					
 Italian walnut	-	21642.31	21648.31	-	21649.31
 White Oak	-	21642.32	21648.32	-	21649.32
 Wengé	-	21642.33	21648.33	-	21649.33




Eikon Tactil and Eikon Evo cover plates for British standard: guideline

		2-module		3-module/monobloc	5-module/monobloc	
		Eikon Tactil	Eikon Evo	Eikon Evo	Eikon Tactil	Eikon Evo
						
Luminosi (Bevelled crystal)						
	White diamond	21662.70	21642.70	21648.70	▲21667.70	21649.70
	Aqua	21662.71	21642.71	21648.71	▲21667.71	21649.71
	Silver ice	-	21642.72	21648.72	-	21649.72
	Pearl grey	21662.73	21642.73	21648.73	▲21667.73	21649.73
	Opal brown	-	21642.74	21648.74	-	21649.74
	Bronze mirror	-	21642.75	21648.75	-	21649.75
	Black Diamond	21662.76	21642.76	21648.76	▲21667.76	21649.76
Raffinati (Natural leather)						
	Cream	-	21642.21	21648.21	-	21649.21
	Tobacco	-	21642.22	21648.22	-	21649.22
Speciali (Corian®)						
	Glacier ice	-	21642.41	21648.41	-	21649.41
Essenziali (total aluminium and crystal)						
	Total White	-	21642.17	21648.17	-	21649.17
	Total Black	-	21642.18	21648.18	-	21649.18
	Total White Diamond	-	21642.87	21648.87	-	21649.87
	Total Black Diamond	-	21642.88	21648.88	-	21649.88


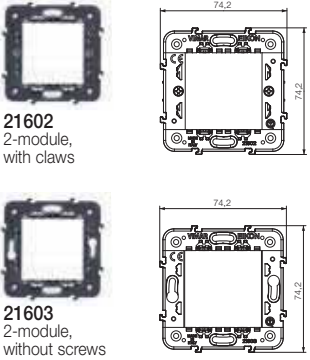





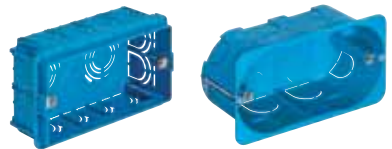



Eikon Chrome cover plates for British standard: guideline

	2-module		3-module/monobloc		5-module/monobloc	
						
	Classic	Round	Classic	Round	Classic	Round
Bright (Varnished metal)						
 Artic white	20647.C01	20677.C01	20648.C01	20678.C01	20649.C01	20679.C01
 Antique white	20647.C02	20677.C02	20648.C02	20678.C02	20649.C02	20679.C02
 Metallic champagne	20647.C07	20677.C07	20648.C07	20678.C07	20649.C07	20679.C07
 Metallic titanium	20647.C08	20677.C08	20648.C08	20678.C08	20649.C08	20679.C08
 Metallic Atlantic grey	-	20677.C09	-	20678.C09	-	20679.C09
 Metallic silver	20647.C10	20677.C10	20648.C10	20678.C10	20649.C10	20679.C10
 Metallic Siena	20647.C11	-	20648.C11	-	20649.C11	-
 Metallic anthracite	20647.C12	20677.C12	20648.C12	20678.C12	20649.C12	20679.C12
 Matt silver	20647.C13	20677.C13	20648.C13	20678.C13	20649.C13	20679.C13
 Matt titanium	20647.C14	20677.C14	20648.C14	20678.C14	20649.C14	20679.C14
 Matt anthracite	20647.C15	20677.C15	20648.C15	20678.C15	20649.C15	20679.C15
Refined (Refined metal)						
 Satin gold (with gold frame)	20647.G21	20677.G21	20648.G21	20678.G21	20649.G21	20679.G21
 Satin nickel	20647.C22	20677.C22	20648.C22	20678.C22	20649.C22	20679.C22
 Satin chrome	-	20677.C23	-	20678.C23	-	20679.C23
 Polished gold (with gold frame)	20647.G24	20677.G24	20648.G24	20678.G24	20649.G24	20679.G24
Inox (Stainless steel)						
 Brushed inox	20647.C91	20677.C91	20648.C91	20678.C91	20649.C91	20679.C91
Wood (Solid wood)						
 African wengé	20647.C31	-	20648.C31	-	20649.C31	-
 White oak	20647.C32	20677.C32	20648.C32	20678.C32	20649.C32	20679.C32
 Italian walnut	20647.C35	20677.C35	20648.C35	20678.C35	20649.C35	20679.C35
 American cherrywood	-	20677.C36	-	20678.C36	-	20679.C36
Glass (Crystal)						
 Black ice	20647.C71	-	20648.C71	-	20649.C71	-
 White ice	20647.C72	-	20648.C72	-	20649.C72	-
 Silver mirror	20647.C81	-	20648.C81	-	20649.C81	-





Eikon Total Look cover plates for British standard: guideline

Bright (Varnished metal)						
 Artic white	20647.B01	20677.B01	20648.B01	20678.B01	20649.B01	20679.B01
 Matt silver	20647.N13	20677.N13	20648.N13	20678.N13	20649.N13	20679.N13
 Matt anthracite	20647.15	20677.15	20648.15	20678.15	20649.15	20679.15


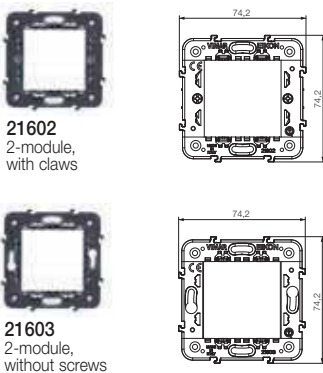




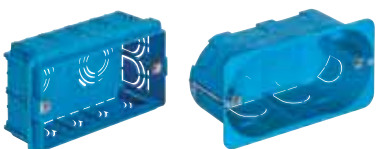





Eikon Tactil: standard types of mounting

Module	Box	Frame	Cover plate*
2 for ø 60 mm or 56x56 mm mounting box	<p>Flush mounting</p>  <p>V71001 For masonry GW 650 °C, light blue V71001.AU GW 960 °C, black</p> <p>V71701 For hollow walls, for frame without claws, GW 850 °C, light blue</p>	 <p>21602 2-module, with claws</p> <p>21603 2-module, without screws</p>	 <p>21662... 2-module Dimensions: 95,4x95,4 mm</p>
3	<p>Flush mounting</p>  <p>V71303 For masonry GW 650 °C, light blue V71303.AU GW 960 °C, black</p> <p>V71703 For hollow walls GW 850 °C, light blue</p>	 <p>21613 3-module, with screws</p> 	 <p>21663... 3-module Dimensions: 118x106 mm</p>
4	<p>Flush mounting</p>  <p>V71304 For masonry GW 650 °C, light blue V71304.AU GW 960 °C, black</p> <p>V71704 For hollow walls GW 850 °C, light blue</p>	 <p>21614 4-module, with screws</p> 	 <p>21664... 4-module Dimensions: 140,5x106 mm</p>

Eikon Tactil: British standard mounting

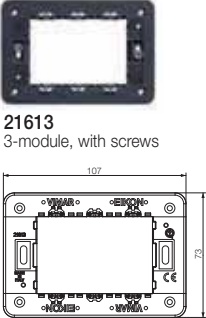Module	Box	Frame	Cover plate*
5	<p>Flush mounting</p>  <p>2-gang mounting box Fixing centres: 120,6 mm</p>	 <p>20609¹ 5-module, with screws M 3,5</p> 	 <p>▲21667... 5-module Dimensions: 163x95,4 mm</p>

Eikon Evo: standard types of mounting



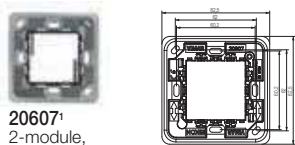






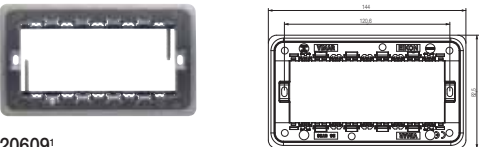


Module	Box	Frame	Cover plate*
2 for \varnothing 60 mm or 56x56 mm mounting box	<p>Flush mounting</p>  <p>V71001 For masonry GW 650 °C, light blue V71001.AU GW 960 °C, black</p> <p>V71701 For hollow walls, for frame without claws, GW 850 °C, light blue</p>	 <p>21602 2-module, with claws</p> <p>21603 2-module, without screws</p>	 <p>21642... 2-module Dimensions: 95,4x95,4 mm</p>
3	<p>Flush mounting</p>  <p>V71303 For masonry GW 650 °C, light blue V71303.AU GW 960 °C, black</p> <p>V71703 For hollow walls GW 850 °C, light blue</p>	 <p>21613 3-module, with screws</p>	 <p>21653... 3-module Dimensions: 118x106 mm</p>
4	<p>Flush mounting</p>  <p>V71304 For masonry GW 650 °C, light blue V71304.AU GW 960 °C, black</p> <p>V71704 For hollow walls GW 850 °C, light blue</p>	 <p>21614 4-module, with screws</p>	 <p>21654... 4-module Dimensions: 140,5x106 mm</p>
7	<p>Flush mounting</p>  <p>V71306 For masonry GW 650 °C, light blue V71306.AU GW 960 °C, black</p> <p>V71706 For hollow walls GW 850 °C, light blue</p>	 <p>21617 7-module, with screws</p>	 <p>21657... 7-module Dimensions: 208x106 mm</p>

* Cover plates range, page 82

Eikon Evo: standard types of mounting

Module	Box	Touch screen/frame	Cover plate*
<p>8 (4+4)</p>	<p>Flush mounting</p>  <p>V71318 For masonry GW 650 °C, light blue</p> <p>V71718 For hollow walls GW 850 °C, light blue</p>	 <p>21554 4,3" Full Flat video touch screen, grey 21554.B: white 21554.BN: neutral</p> <p>21511... 4,3" touch screen Full Flat, with built-in 8-module mounting frame</p> <p>21848... Touch screen a colori, 4,3" Full Flat Well-contact Plus, with built-in 8-module mounting frame</p> <p>21618 4+4-module, with claws</p>	 <p>21668... 8-module (4+4) Dimensions: 155,2x155,2 mm</p> <p>Cover plate rotated at a 90° angle</p>
<p>8 (4+4)</p>	<p>Semi-flush mounting</p>  <p>V71318 For masonry GW 650 °C, light blue</p> <p>V71718 For hollow walls GW 850 °C, light blue</p>	 <p>21553.2 10" IP multimedia video touch screen</p>	 <p>21665... For multimedia video touch screen Dimensions: 345x250 mm Material and finishing availability: 21665.11: Aluminium 21665.70: White diamond 21665.76: Black Diamond</p>







Eikon Evo: British standard mounting

Module	Box	Frame	Cover plate*
1 and 2	<p>Flush mounting</p>  <p>1-gang mounting box Fixing centres: 60,3 mm</p>	 <p>20606' 1-module, with screws M 3,5, grey</p> <p>20606.B' 1-module, with screws M 3,5, white</p> <p>20606.N' 1-module, with screws M 3,5, Next</p>  <p>20607' 2-module, with screws M 3,5</p>	 <p>21642... 2-module Dimensions: 95,4x95,4 mm</p>
3 and mono-bloc	<p>Flush mounting</p>  <p>1-gang mounting box Fixing centres: 60,3 mm</p>	 <p>20608' 3-module, with screws M 3,5</p>  <p>20215.L Example of monobloc device</p> <p>20017.L Example of monobloc device</p>	 <p>21648... 3-module Dimensions: 95,4x95,4 mm</p>
5 and mono-bloc	<p>Flush mounting</p>  <p>2-gang mounting box Fixing centres: 120,6 mm</p>	 <p>20609' 5-module, with screws M 3,5</p>  <p>20222.L Example of monobloc device in horizontal mounting</p> <p>20291 Example of monobloc device in vertical mounting</p>	 <p>21649... 5-module Dimensions: 163x95,4 mm</p>



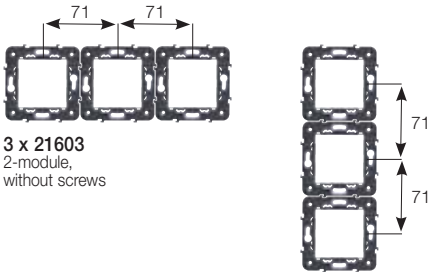

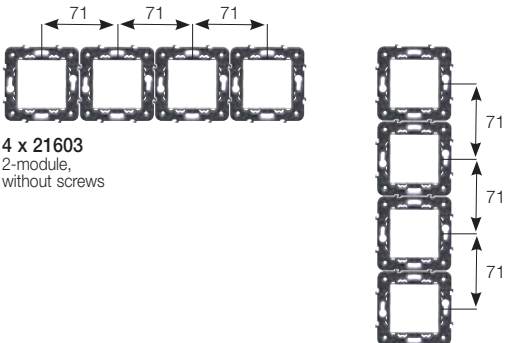

* Cover plates range, page 82

¹ Items conform to BS 5733

Eikon Evo: 71 mm between centres installation

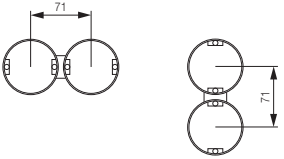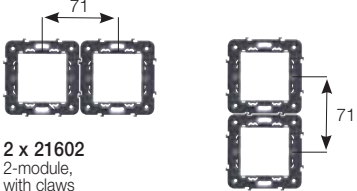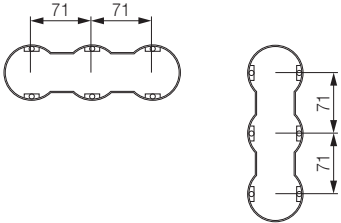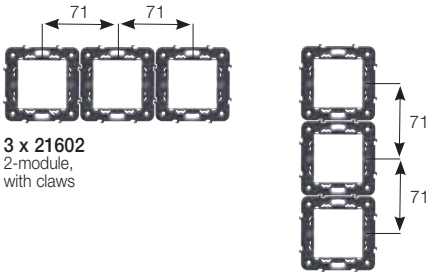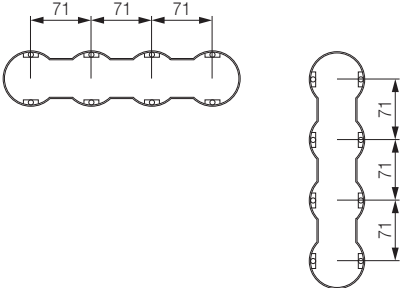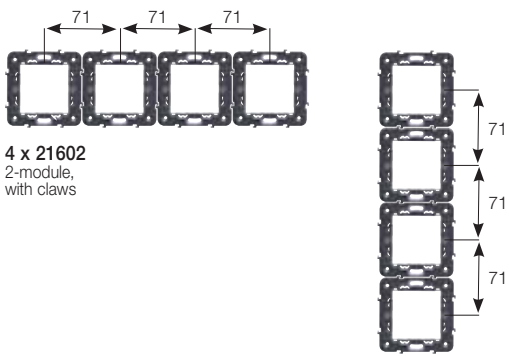



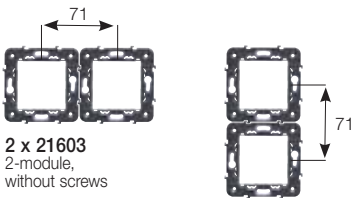






Module	Box	Frame
<p>2+2 71 mm between centres</p>		 <p>2 x 21602 2-module, with claws</p>
<p>2+2+2 71 mm between centres</p>		 <p>3 x 21602 2-module, with claws</p>
<p>2+2+2+2 71 mm between centres</p>		 <p>4 x 21602 2-module, with claws</p>

Eikon Evo: 71 mm between centres installation




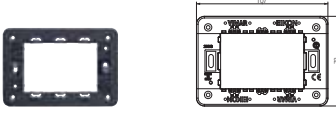
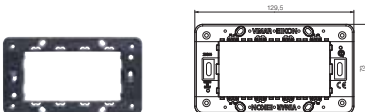
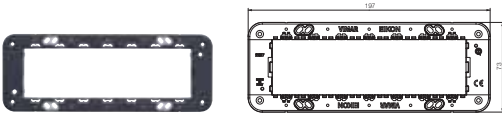
		Cover plate*
 <p>2 x 21603 2-module, without screws</p>	 <p>21643... 4-module (2+2), for horizontal and vertical installation. Dimensions: 166,4x95,4 mm</p>	
 <p>3 x 21603 2-module, without screws</p>	 <p>21644... 6-module (2+2+2), for horizontal and vertical installation. Dimensions: 237,4x95,4 mm</p>	
 <p>4 x 21603 2-module, without screws</p>	 <p>21669... 8-module (2+2+2+2), for horizontal and vertical installation. Dimensions: 308,4x95,4 mm</p>	

* Cover plates range, page 82

Eikon Chrome and Eikon Total Look: standard types of mounting

Module	Box	
2 for ø 60 mm mounting box	<p>Flush mounting</p>  <p>V71001 For masonry GW 650 °C, light blue V71001.AU GW 960 °C, black</p>  <p>V71701 For hollow walls, for frame without claws, GW 850 °C, light blue</p>	<p>Surface mounting</p>  <p>09971.A 43,5 deep, RAL 9001 ivory 09971.01: white Δ 09971.SL: Silver</p>
	<p>Flush mounting</p>  <p>V71303 For masonry GW 650 °C, light blue V71303.AU GW 960 °C, black</p>  <p>V71703 For hollow walls GW 850 °C, light blue</p>	<p>Surface mounting</p>  <p>09983 35-45 mm deep, grey 09983.01: white Δ 09983.N: Next</p>  <p>09975.A 43,5 mm deep, RAL 9001 ivory 09975.01: white Δ 09975.SL: Silver</p>  <p>Δ 09976.04 30 mm deep, Idea white 09976.14: Idea grey</p>
4	<p>Flush mounting</p>  <p>V71304 For masonry GW 650 °C, light blue V71304.AU GW 960 °C, black</p>  <p>V71704 For hollow walls GW 850 °C, light blue</p>	<p>Table mounting</p>  <p>20784 4-module table mounting box, grey 20784.B As above, white 20784.N As above, Next</p>
7	<p>Flush mounting</p>  <p>V71306 For masonry GW 650 °C, light blue V71306.AU GW 960 °C, black</p>  <p>V71706 For hollow walls GW 850 °C, light blue</p>	<p>Table mounting</p>  <p>20787 7-module table mounting box, grey 20787.B As above, white 20787.N As above, Next</p>



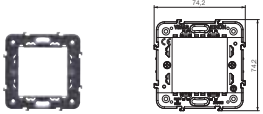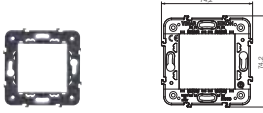









Eikon Chrome and Eikon Total Look: standard types of mounting

Frame	Eikon Chrome cover plate*	Eikon Total Look cover plate*
 <p>21602 2-module, with claws</p>  <p>21603 2-module, without screws</p>	<p>Classic</p> <p>20642... 2-module Dimensions: 85x85 mm</p> <p>Round</p> <p>20672... 2-module Dimensions: 80x80 mm</p> <p>Classic</p> <p>20652... 2-central-module Dimensions: 120x85 mm</p> <p>Round</p> <p>20682... 2-central-module Dimensions: 120x80 mm</p>	<p>Classic</p> <p>20642... 2-module Dimensions: 85x85 mm</p> <p>Round</p> <p>20672... 2-module Dimensions: 80x80 mm</p> <p>Classic</p> <p>20652... 2-central-module Dimensions: 120x85 mm</p> <p>Round</p> <p>20682... 2-central-module Dimensions: 120x80 mm</p>
 <p>21612 2-central-module, with screws</p>  <p>21613 3-module, with screws</p>	<p>Classic</p> <p>20652... 2-central-module Dimensions: 120x85 mm</p> <p>Round</p> <p>20682... 2-central-module Dimensions: 120x80 mm</p> <p>Classic</p> <p>20653... 3-module Dimensions: 120x85 mm</p> <p>Round</p> <p>20683... 3-module Dimensions: 120x80 mm</p>	<p>Classic</p> <p>20652... 2-central-module Dimensions: 120x85 mm</p> <p>Round</p> <p>20682... 2-central-module Dimensions: 120x80 mm</p> <p>Classic</p> <p>20653... 3-module Dimensions: 120x85 mm</p> <p>Round</p> <p>20683... 3-module Dimensions: 120x80 mm</p>
 <p>21614 4-module, with screws</p>	<p>Classic</p> <p>20654... 4-module Dimensions: 142x85 mm</p> <p>Round</p> <p>20684... 4-module Dimensions: 142x80 mm</p>	<p>Classic</p> <p>20654... 4-module Dimensions: 142x85 mm</p> <p>Round</p> <p>20684... 4-module Dimensions: 142x80 mm</p>
 <p>21617 7-module, with screws</p>	<p>Classic</p> <p>20657... 7-module Dimensions: 206x85 mm</p> <p>Round</p> <p>20687... 7-module Dimensions: 210x80 mm</p>	<p>Classic</p> <p>20657... 7-module Dimensions: 206x85 mm</p> <p>Round</p> <p>20687... 7-module Dimensions: 210x80 mm</p>

* Cover plates range, from page 86 and 88

Δ Available until stocks last

Eikon Chrome and Eikon Total Look: standard types of mounting

Module	Box
8 (4+4)	<p>Flush mounting</p>  <p>V71318 For masonry GW 650 °C, light blue</p>  <p>V71718 For hollow walls GW 850 °C, light blue</p>
	<p>Flush mounting</p>  <p>V71318 For masonry GW 650 °C, light blue</p>  <p>V71718 For hollow walls GW 850 °C, light blue</p> <p>Table mounting</p>  <p>20788 8-module with Classic and Round frame, grey 20788.B white 20788.N Next Dimensions: 141x151,9x135 mm</p>
1	<p>Panel mounting</p>  <p>16776.AU GW 960 °C</p>
2	 <p>16776.AU x 2 GW 960 °C</p>
14 (7+7)	<p>Flush mounting</p>  <p>V71320 For masonry GW 650 °C, light blue</p>  <p>V71720 For hollow walls GW 850 °C, light blue</p> <p>Surface mounting</p>  <p>09920.01, bianco</p>
21 (7+7+7)	<p>Flush mounting</p>  <p>V71321 For masonry GW 650 °C, light blue</p> <p>Surface mounting</p>  <p>09921.01, White △ 09921.14, Grey △ 09921.N, Next</p>



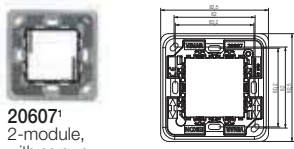






Eikon Chrome and Eikon Total Look: standard types of mounting

Touch screen/frame	Eikon Chrome cover plate*	Eikon Total Look cover plate*
 <p>21554 4,3" Full Flat video touch screen, grey 21554.B: white 21554.BN: neutral</p>	<p>Classic</p>  <p>20668... 8-module Dimensions: 142x156 mm</p>	<p>Classic</p>  <p>20668... 8-module Dimensions: 142x156 mm</p>
 <p>21511... 4,3" touch screen Full Flat, with built-in 8-module mounting frame 21848... Touch screen a colori, 4,3" Full Flat Well-contact Plus, with built-in 8-module mounting frame</p>  <p>21618 4+4-module, with claws</p>	<p>Classic</p>  <p>20668... 8-module Dimensions: 142x156 mm</p>	<p>Classic</p>  <p>20668... 8-module Dimensions: 142x156 mm</p>
 <p>20626 1-module, with screws</p>		<p>Classic Round</p>  <p>20666... 1-module Dimensions: 40x80 mm</p>  <p>20696... 2-module Dimensions: 40x80 mm</p>
 <p>20627 2-module, with screws</p>		<p>Classic Round</p>  <p>20667... 2-module Dimensions: 40x137 mm</p>  <p>20697... 2-module Dimensions: 40x137 mm</p>
 <p>20620 14-module (7+7), with screws</p>	<p>Classic</p>  <p>20660... 14-module (7+7), technopolymer, with signalling tags. Dimensions: 207x153 mm</p>	
 <p>20621 21-module (7+7+7), with screws</p>	<p>Classic</p>  <p>20661... 21-module (7+7+7), technopolymer, with signalling tags. Dimensions: 207x223 mm</p>	

* Cover plates range, from page 86 and 88

Δ Available until stocks last

Eikon Chrome and Eikon Total Look: British standard mounting

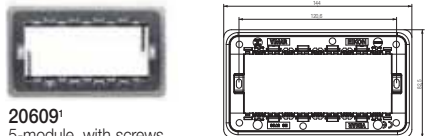Module	Box	Frame
<p>1 and 2</p>	<p>Flush mounting</p>  <p>1-gang mounting box Fixing centres: 60,3 mm</p>	 <p>20606' 1-module, with screws M 3,5, grey</p> <p>20606.B' 1-module, with screws M 3,5, white</p> <p>20606.N' 1-module, with screws M 3,5, Next</p>  <p>20607' 2-module, with screws M 3,5</p>
<p>3 and monobloc</p>	<p>Flush mounting</p>  <p>1-gang mounting box Fixing centres: 60,3 mm</p>	 <p>20608' 3-module, with screws M 3,5</p>  <p>20215.L Example of monobloc device</p> <p>20017.L Example of monobloc device</p>
<p>5 and monobloc</p>	<p>Flush mounting</p>  <p>2-gang mounting box Fixing centres: 120,6 mm</p>	 <p>20609' 5-module, with screws M 3,5</p>  <p>20222.L Example of monobloc device in horizontal mounting</p> <p>20291 Example of monobloc device in vertical mounting</p>

Eikon Chrome and Eikon Total Look: British standard mounting

Eikon Chrome cover plate*	Eikon Total Look cover plate*
<p>Classic</p>  <p>20647'... 2-module Dimensions: 95x95x9 mm</p>	<p>Classic</p>  <p>20647'... 2-module Dimensions: 95x95x9 mm</p>
<p>Round</p>  <p>20677'... 2-module Dimensions: 95x95x9 mm</p>	<p>Round</p>  <p>20677'... 2-module Dimensions: 95x95x9 mm</p>
<p>Classic</p>  <p>20648'... Cover plate for horizontal and vertical installation. Dimensions: 95x95x9 mm Cover plate for monobloc device mounting, only.</p>	<p>Classic</p>  <p>20648'... Cover plate for horizontal and vertical installation. Dimensions: 95x95x9 mm Cover plate for monobloc device mounting, only.</p>
<p>Round</p>  <p>20678'.. Cover plate for horizontal and vertical installation. Dimensions: 95x95x9 mm Cover plate for monobloc device mounting, only.</p>	<p>Round</p>  <p>20678'.. Cover plate for horizontal and vertical installation. Dimensions: 95x95x9 mm Cover plate for monobloc device mounting, only.</p>
<p>Classic</p>  <p>20649'... 5-module For horizontal and vertical installation. Dimensions: 155x95x9 mm</p>	<p>Classic</p>  <p>20649'... 5-module For horizontal and vertical installation. Dimensions: 155x95x9 mm</p>
<p>Round</p>  <p>20679'... 5-module For horizontal and vertical installation. Dimensions: 155x95x9 mm</p>	<p>Round</p>  <p>20679'... 5-module For horizontal and vertical installation. Dimensions: 155x95x9 mm</p>

* Cover plates range, from page 86

Customization

Devices and cover plates customization

Vimar laser technology allows the reproduction of any name, logotype or trademark, with absolute precision and indelebility, even for small quantities.

Information

- all devices, buttons and cover plates are customized depending on conditions described below;
- Eikon Tactil**
all cover plates shown in the area highlighted in grey can be customised, with the exception of the **Pearl grey** cover plate (73);
- Eikon Evo**
the following finishings of cover plates are not customizable: **Crystal: silver ice** (72), **pearl grey** (73), **opal brown** (74), **bronze mirror** (75); **Natural leather: tobacco** (22);
- Eikon Chrome**
the following finishings of cover plates are not customizable: **Bright: matt titanium** (.C14); **Glass: black ice** (.C71), **silver mirror** (.C81);
- Wooden cover plate** customization: prices and quantities agreed with the commercial networks.
- if the required customisation is listed in the table "Standard symbols and wordings", indicate the relative code in addition to the required item code, **if it is not included in the table contact the Vimar sales office to check availability**;
- the customisation is **visible in the dark**: on the bottom of rocker controls and buttons, with the standard symbols available from the catalogue; in the centre on axial controls and buttons, with the standard symbols available from the catalogue; on the bottom of interchangeable rocker buttons (20031..., 20032... e 20033...) with customisable spaces; in the centre of interchangeable axial buttons (20131.0... and 20132.0...) with customisable spaces;

- the interchangeable axial buttons (20131.0..., 20132.0...) can be customised by applying a Mylar label in the given space. For large quantities, customisations not included in the "Standard symbols and wordings" or for laser-printed customisations, please contact the Vimar sales department.

Laser customization advantages

- indelible engraving that does not deteriorate over time;
- high-precision reproduction even of very fine lines and complex images;
- service available even for minimal quantities;
- possibility of ordering the same customization at different times with identical results.

The few limits of technology

- it is not possible to reproduce coloured images.

What to supply

- a printout of the image to be reproduced, in black-and-white line drawing scaled 2 or 3 times larger than the finished size;
- an image in EPS, TIFF or JPEG format of the subject to be reproduced.

Things to avoid

- do not provide photocopies;
- do not fax the image to be reproduced, because the low definition of the fax makes it impossible to reproduce the customization with the high quality of laser system.

How to proceed

- enclose (without paper clips, staples or adhesive tape) or send the image to be reproduced;
- deliver all the documentation to your area wholesaler/distributor, who will then forward it to Vimar.

Standard symbols and wordings (♦ symbols already on product catalogue)

♦S20.001	S20.002	S20.003	S20.004	S20.005	S20.006	S20.007	S20.008	S20.009	S20.010	S20.011	S20.012	S20.013	S20.014	S20.015	S20.016	S20.017
S20.018	S20.019	S20.020	S20.021	S20.022	S20.023	S20.024	S20.025	S20.026	S20.027	S20.028	♦S20.029	S20.030	S20.031	S20.032	S20.033	S20.034
S20.035	S20.036	S20.037	S20.038	♦S20.039	♦S20.040	S20.041	S20.042	S20.043	S20.044	S20.045	S20.046	S20.047	S20.048	♦S20.049	S20.050	S20.051
S20.052	♦S20.053	♦S20.054	♦S20.055	♦S20.056	♦S20.057	♦S20.058	♦S20.059	♦S20.060	S20.061	S20.062	S20.063	S20.064	S20.065	S20.066	S20.067	S20.068
S20.069	S20.070	S20.071	S20.072	♦S20.073	♦S20.074	S20.075	S20.076	S20.077	S20.078	S20.079	S20.080	S20.081	S20.082	S20.083	S20.084	S20.085
S20.086	S20.087	S20.088	S20.089	S20.090	S20.091	S20.092	S20.093	S20.094	S20.095	S20.096	S20.097	S20.098	S20.099	S20.100	S20.101	S20.102
S20.103	S20.104	S20.105	S20.106	S20.107	S20.108	S20.109	S20.110	S20.111	S20.112	S20.113	S20.114	S20.115	S20.116	♦S20.117	S20.118	S20.119
S20.120	S20.121	S20.122	S20.123	S20.124	S20.125	S20.126	S20.127	S20.128	S20.129	S20.130	S20.131	S20.132	S20.133	S20.134	S20.135	S20.136
S20.137	S20.138	S20.139	S20.140	S20.141	S20.142	S20.143	S20.144	S20.145	S20.146	S20.147	S20.148	S20.149	S20.150	S20.151	S20.152	S20.153
S20.154	S20.155	S20.156	S20.157	S20.158	S20.159	S20.160	S20.161	S20.162	S20.163	S20.164	S20.165	S20.166	S20.167	S20.168	S20.169	S20.170
S20.171	S20.172	S20.173	S20.174	S20.175	S20.176	S20.177	S20.178	S20.179	S20.180	S20.181	S20.182	S20.183	S20.184	S20.185	MAKE UP ROOM	DO NOT DISTURB
LIGHT	OPEN	CLOSE	ALARM	COME IN	BACK	STAIRS	BATHROOM	CELLAR	STOREROOM	ATTIC	TERRACE	OUTSIDE	GARDEN	GARAGE	GENERAL	♦ ♦ ♦
S20.188.EN	S20.189.EN	S20.190.EN	S20.191.EN	S20.192.EN	S20.193.EN	S20.194.EN	S20.195.EN	S20.196.EN	S20.197.EN	S20.198.EN	S20.199.EN	S20.200.EN	S20.201.EN	S20.202	S20.203.EN	S20.204

EIKON

Customization



Examples of Eikon Tactil custom controls



Eikon Tactil




Eikon Tactil control with adhesive labels 21847


Available symbols in Mylar labels 21847 (Some symbols are repeated several times)

						ON	OFF					...		
Repetition	10	1	1	1	1	5	5	1	2	1	1	8		
Repetition	3	2	4	5	2	4	1	1	1	3	3	2		
Repetition	1	1	1	1	1	1	3	3	1	1	1	2		
												APRE		
Repetition	1	1	1	1	1	1	1	1	1	2	2	1		
												CHIUDE		
Repetition	1	1	2	2	2	2	2	2	2	2	2	1		
	1	2	3	4	5	6								
Repetition	1	1	1	1	1	1	1	2	2	1	2	2		
Repetition	3	3	3	2	3	2	2	2	2	2	2	2		
			GENERALE	GENERAL	ALARM	LUCE	LIGHT	BAGNO	BATHROOM	OPEN	CLOSE	ESTERNO		
Repetition	2	2	1	1	2	1	1	1	1	1	1	1		
			SCALE	STAIRS	GARAGE	GIARDINO	GARDEN	TERRAZZA	TERRACE	OUTSIDE	ATTIC	SOLAIO	CANTINA	CELLAR
Repetition	1	1	2	1	1	1	1	1	1	1	1	1	1	


Customizable positions




21662...



21663...



21664...



21666...

Examples of Eikon Evo, Eikon Chrome and Eikon Total Look custom buttons and controls



Eikon Evo



Eikon Chrome




Eikon Total Look




Lightable button with chosen symbol

Customised controls and buttons

Customizable positions



Eikon Evo cover plates



Eikon Chrome and Eikon Total Look cover plates



Interchangeable controls and buttons.
Laser-printed customisation that is **not visible** in the dark, at the top and in the centre.



Interchangeable axial controls and buttons.
Laser-printed customisation that is **not visible** in the dark, at the top and bottom.



Interchangeable buttons 20031... 20032... 20033...
Customization **not visible** in darkness at the top and centre, **visible** in darkness at the bottom with 14x7 mm area.



Interchangeable axial buttons 20131.0... and 20132.0...
Laser-printed customisation that is **not visible** in the dark, at the top and bottom. In the centre, the customisation is **visible** in the dark, and is done using Mylar labels (see warnings).

Smart card customization

The rear of the card can be customised on request, by providing a digital image of the subject in eps, tiff or jpg format.



Isoset

Modules

1

IP40



IP55



IP55 cover

2



3



4



6



**) For white version, add to the basic code: .01
For granite version, add to the basic code: .14

8



10



12



14



16



B.017013 EN 1704
8 007352 572638



Viale Vicenza, 14
36063 Marostica VI - Italy
Tel. +39 0424 488 600
Fax +39 0424 488 709
www.vimar.com