


CleanAHull™

By GLOBAtech Australia

CleanAHull – Dual 2 Transducer System

Specifications

Power (auto switching)	12/24 Volt
12 volt operating range	10.6v - 16v
12 volt cut off voltage	10.5V
Current draw @ 12v	420ma (avg.)
24 volt operating range	22.6V – 30V
24 volt cut off voltage	22.5V
Current draw @ 24v	280ma (avg.)
Transducer power output	50 watts maximum
Operating temperature	
Storage temperature	-22°F to 158°F
Maximum relative humidity	100%
Control console dimensions	7.91" x 4.76" x 2.17"
Control console cable length	16 ft.
Transducer dimensions	2.36" x 2.36"
Transducer cable length	32 ft.
Transducer Mounting Plate Dims	2.36" x 0.2"
Regulatory Certifications	FCC Part 15B
	ANSI C63.4
	AS/NZS 61000.6.3
System Components Included:	
Control Console w/power cable	1 ea.
Transducers w/integral cables	2 ea.
transducer mounting plates	2 ea.
In-line power fuse holder	1 ea.
20A power fuse	1 ea.
Spare 10A transducer circuit fuse	1 ea.
Epoxy transducer bonding kit	1 Kit
Mounting plate Loctite	1 Tube
Operation & Installation Manual	1 ea.

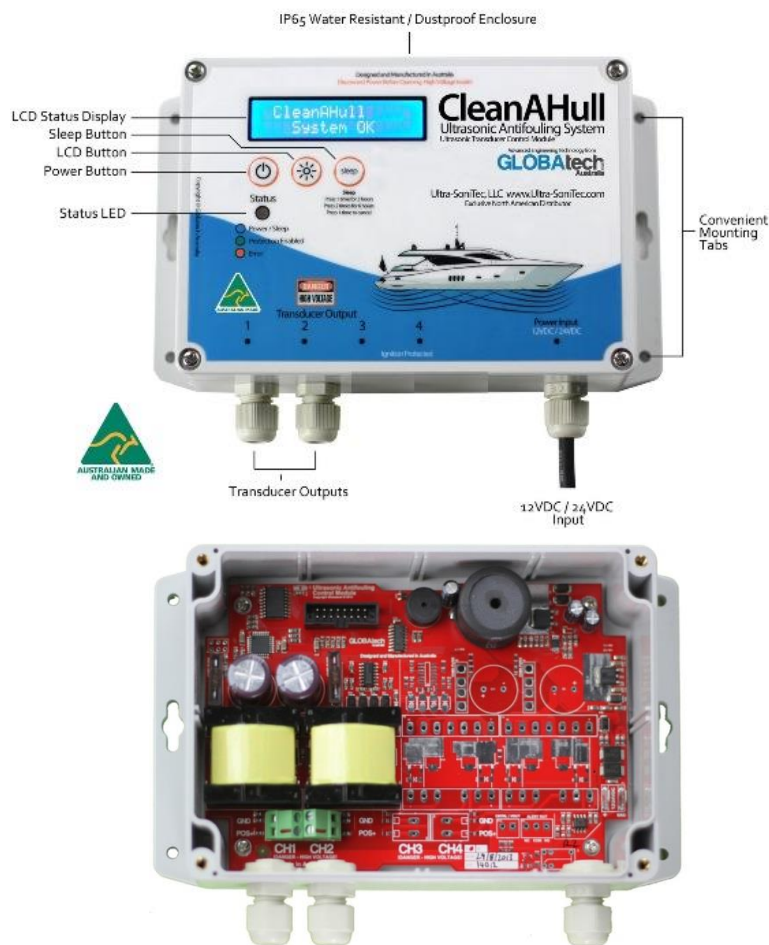

1140 Tate Blvd. SE
Hickory, NC 28602

www.Ultra-Sonitec.com

626-360-4749

sales@ultra-sonitec.com



Exclusive North American Distributor

CleanAHull™

By GLOBAtech Australia

CleanAHull – Dual 2 Transducer System

Advanced Ultrasonic Antifouling System



- ✓ Multi-function LCD control screen
- ✓ Touch pad user interface
- ✓ Hi-tech professional design controller
- ✓ High acoustic mass 50 watt transducers
- ✓ Anodized compact transducer design
- ✓ Anodized transducer mounting plates
- ✓ 32 ft. long transducer cables
- ✓ Dedicated individual ultrasonic generators
- ✓ Individually fused transducer circuits
- ✓ Auto sensing dual 12/24 voltage
- ✓ 15 ft. control power cable
- ✓ Low power consumption
- ✓ Low voltage sensing and cut off
- ✓ Dynamic temperature control
- ✓ ENIG coated circuit board
- ✓ Water resistant IP65 rated control enclosure
- ✓ Submersible IP68 rated transducers
- ✓ Installation materials included

Industry Leading Features

 <p>Advanced Smarts Zero Configuration Dynamic Algorithms</p>	 <p>Status At A Touch Multi-Function Liquid Crystal Display</p>	 <p>Automatic 12/24V Self Monitoring Low Voltage Protect</p>	 <p>"Blast" Algorithm Extra Power Burst Enhanced Protection</p>
 <p>Dedicated Generators Quality Components ENIG Plated PCB Indiv. Fused Circuits</p>	 <p>High Acoustic Mass Anodized Aluminum Piezo Quartz Element IP68 Rated (+3 ft.)</p>	 <p>Lexan Enclosure Lexan Face IP65 Rated Touch Key Pad</p>	 <p>Australian Engineering Australian Manufacturing AS/NZS 61000.6.3 FCC Part 15 (B) Class B</p>

1140 Tate Blvd. SE
Hickory, NC 28602

www.Ultra-Sonitec.com

626-360-4749

sales@ultra-sonitec.com



Exclusive North American Distributor