



NOTES: UNLESS OTHERWISE SPECIFIED

1. SEE DRAWING NO. CB-00294 AND PROCEDURE P-1000 FOR ASSEMBLY AND TEST INSTRUCTION. PROCEDURES AND ASSEMBLY DRAWINGS ARE FOR INTERNAL USE ONLY.
2. ALL TESTING IS PERFORMED IAW BATTERY COUNCIL INTERNATIONAL STANDARDS.
3. ALL DIMENSIONS ARE INCH [MM].
4. ABBREVIATION USED IN TITLE IS: SEALED LEAD ACID (SLA).


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
D	SEE DCN PVX2120D	8/10/11	JBT

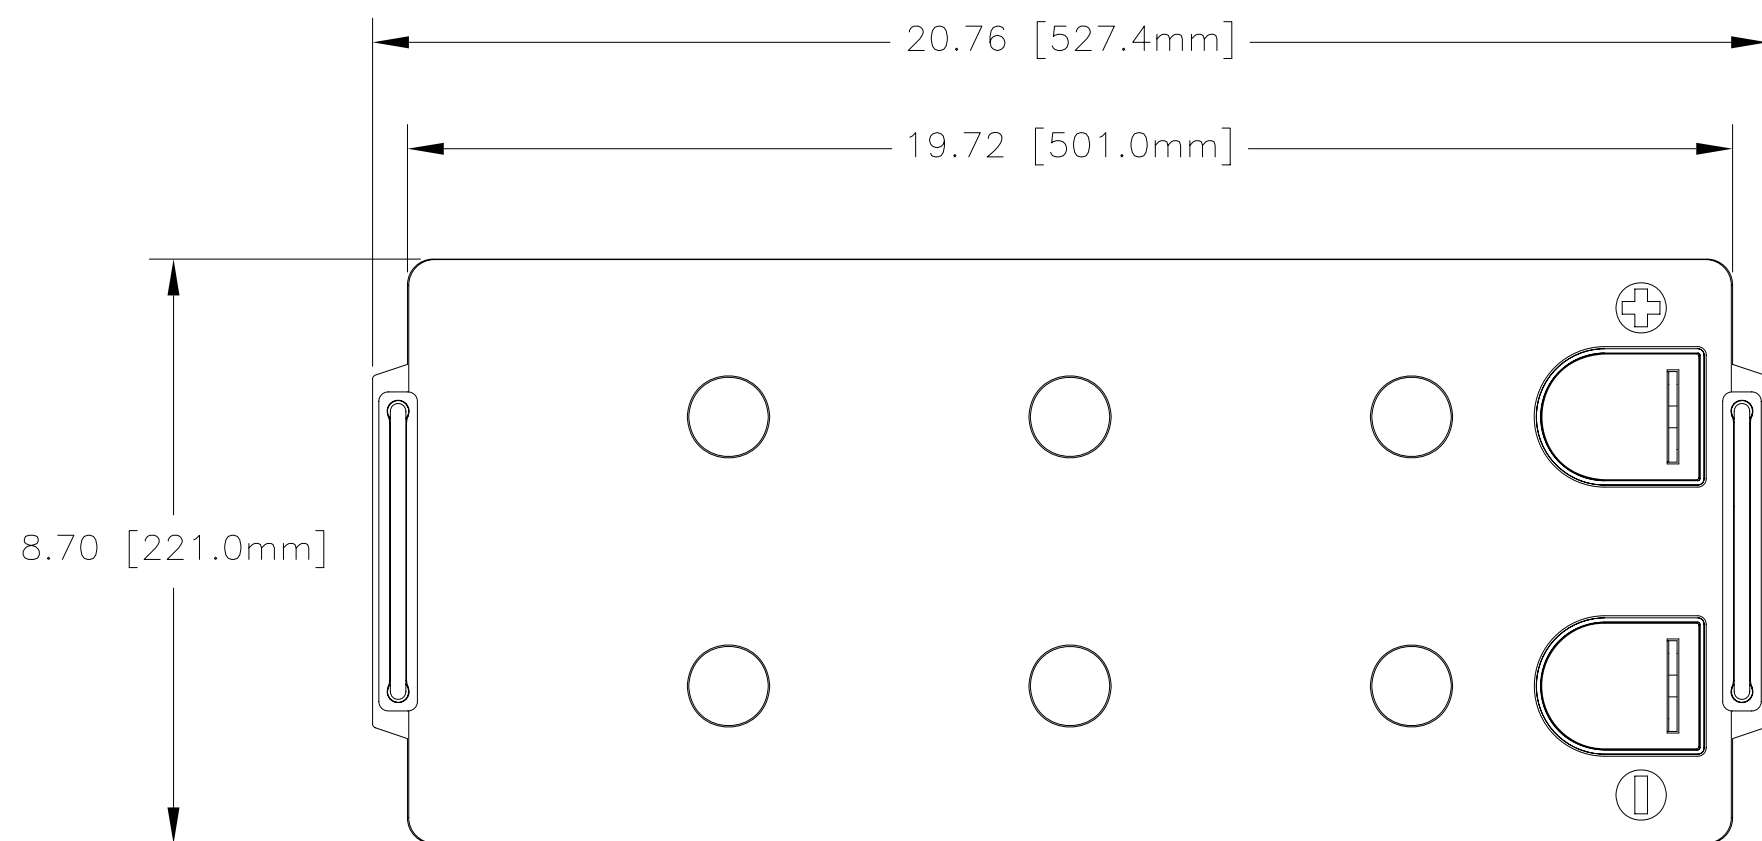

PVX-2120 TERMINAL OPTION

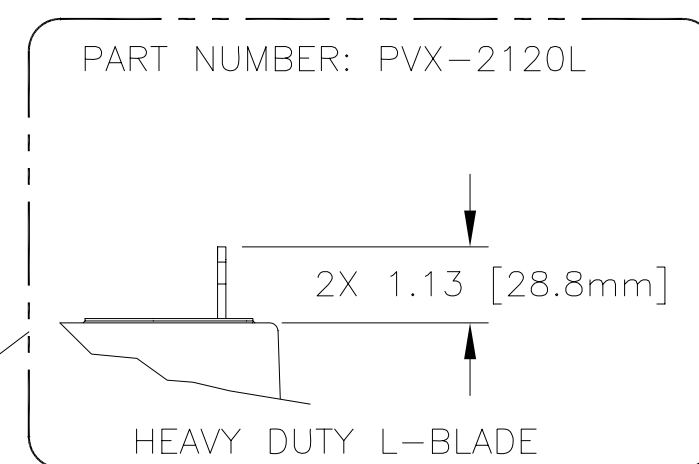

NOTE: SEE OPTION LISTED

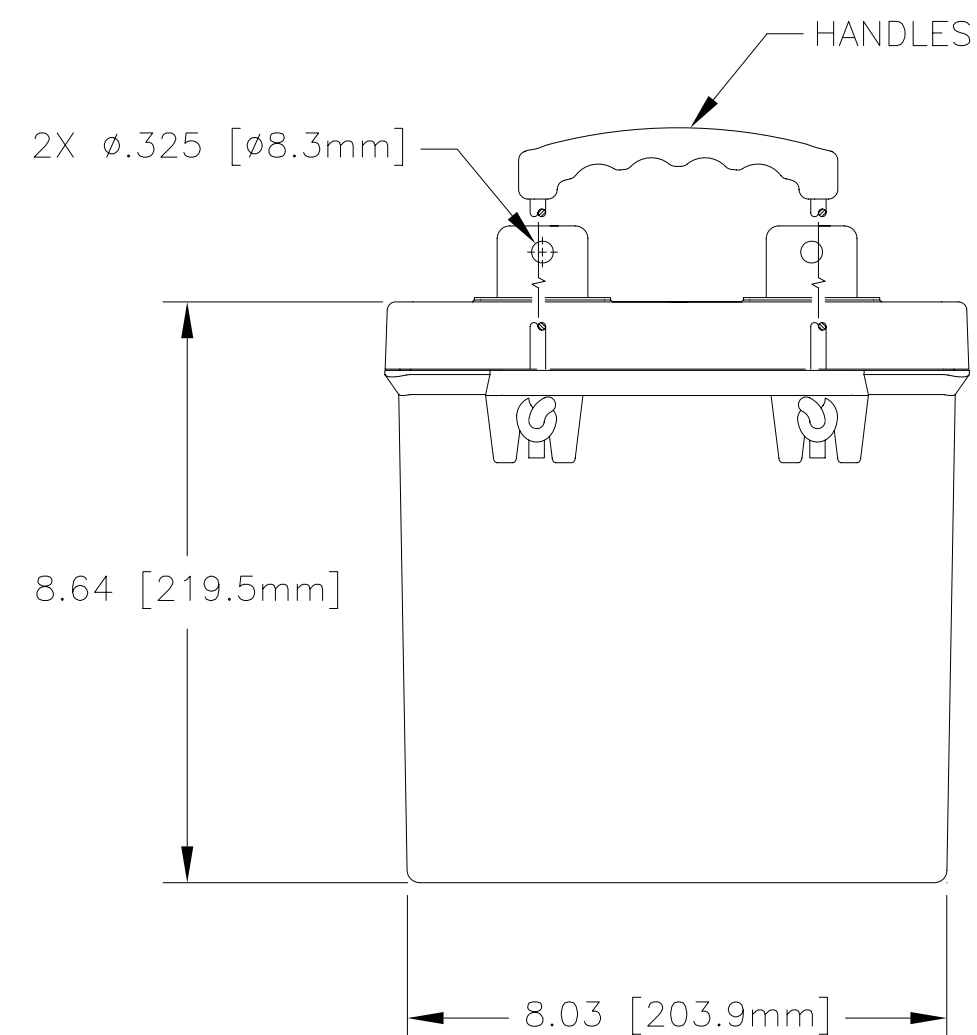

ENVELOPE DRAWING

CAPACITY RATINGS	
PART NUMBER	PVX-2120
NOMINAL WEIGHT	127 LBS[57.6 KG]
AMPERE HOUR CAPACITY @ 24 HOUR 1.75 VOLTS/CELL @ 77°F (25° C)	212 AH

QTY REQD	CAGE CODE	PART OR IDENTIFYING NO.	NOMENCLATURE OR DESCRIPTION	MATERIAL SPECIFICATION	ITEM NO.
PARTS LIST					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± 1/32 .XX ± .06 ± 1° .XXX ± .030			CONTRACT NO.		CONCORDE BATTERY CORPORATION 2009 SAN BERNARDINO RD, W. COVINA, CA 91790
TREATMENT NONE			APPROVALS	DATE	
FINISH NONE			DRAWN ELH	8/13/01	TITLE BATTERY, SLA, 12 VOLT, PVX-2120
SIMILAR TO			CHECKED HRF	8/21/01	SIZE C
ACT WT			APPROVED JBT	8/23/01	CAGE CODE 63017
CALC WT			ISSUED JJ	8/12/11	DWG NO. PVX-2120
				SCALE NONE	REV D
				SHEET 1	OF 1